

5" OR 6" DOWNLIGHT 10W TITANIUM LED SERIES



PRO



10W REPLACES



**65W
Inc.**

80% Energy Savings

\$192 Savings
per lamp*

- ⌚ Suitable for installation in 5" or 6" housing
- ⌚ Installs in just minutes
- ⌚ Comfortable diffused light
- ⌚ Smooth dimming with existing dimmers
- ⌚ Extra long 35,000 hour lifetime
- ⌚ GU24 connector available



LM 79

LM 80


TM 21



DOWNLIGHT PRODUCT FEATURES


5" or 6" Housing Installation

This downlight is suitable for use in most standard 5" and 6" housings that have spring retaining brackets. Simply adjust the mounting springs accordingly for easy installation.

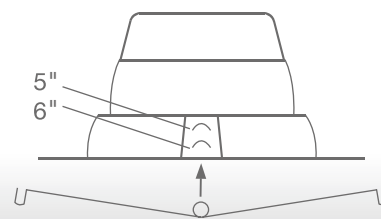


Installation Method

1.




2.



3.



4.

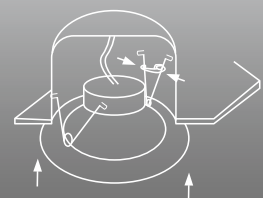

5" OR 6" DOWNLIGHT 10W TITANIUM LED SERIES



APPLICATIONS

General Lighting



Recessed Lighting



Accent Lighting



Ref.#DS092-6DL-10W

SPECIFICATIONS**

| Product Model | 97756 10DL6DIM/827 | 97757 10DL6DIM/830 |
|------------------------------------|-----------------------------------|-----------------------------------|
| Type | 5" or 6" Downlight | 5" or 6" Downlight |
| Base | E26 / LED Adapter (GU24 optional) | E26 / LED Adapter (GU24 optional) |
| Power (W) | 10 | 10 |
| Voltage - Frequency | 120V 60Hz | 120V 60Hz |
| Color Temp. (ANSI) | Soft White 2700K | Warm White 3000K |
| CRI (Ra) | 80 | 80 |
| Typical lumens (lm) | 700 | 700 |
| Efficacy (LPW) | 65 | 65 |
| Beam Angle | 100° | 100° |
| Dimmable | Yes*** | Yes*** |
| Housing Compatibility | Most 5" and 6" housing | Most 5" and 6" housing |
| Power Factor | 0.9 | 0.9 |
| Rated Lifetime - L70 (hrs.) | 35,000 | 35,000 |
| Dia. x MOL | 7.48"x3.74" (190x95mm) | 7.48"x3.74" (190x95mm) |
| Weight (lb. / g) | 0.71lb. / 322g | 0.71lb. / 322g |

* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$4 incandescent with 1000-hr lifetime, \$28 LED with 35,000-hr lifetime
 ** Specification data is preliminary and may be subject to change

*** List of tested dimmer switches available on website
 **** Suitable for damp locations. Not for use where directly exposed to weather or water