

6" DOWNLIGHT 11W TITANIUM CRI^{SP} LED SERIES



CRISP



11W REPLACES



65W Inc.

80% Energy Savings

\$193 Savings per lamp*

- ⌚ Innovative CLICK design
- ⌚ Fits most 4" J-boxes and 5-6" recessed housings
- ⌚ Installs in just minutes - no rewiring
- ⌚ Wet location rated
- ⌚ Exceptional color rendering CRI 90
- ⌚ Richer reds and natural skin tones (R9 60, R13 90)



40,000 H



DIMMABLE



EFFICACY



WARRANTY



CRI (Ra)



WET LOCATION




DOWNLIGHT PRODUCT FEATURES

DUAL INSTALLATION:

4" J-BOX FLUSHMOUNT

ACCESSORIES INCLUDED:



- Attach mounting bracket to J-box
- Click downlight into mounting bracket



Mounting Bracket



J-Box Screws




Wire Nuts



LED Adapter

4" CAN RECESSED

ACCESSORIES SOLD SEPARATELY:



- Connect E26 adapter to the LED adapter
- Insert mounting clips and push downlight up until flush with ceiling



E26 Adapter




Mounting Bracket



Mounting Clips

5-6" CAN RECESSED

ACCESSORIES SOLD SEPARATELY:



- Connect E26 adapter to the LED adapter
- Squeeze mounting springs and push downlight up until flush with ceiling



E26 Adapter




Mounting Springs

6" DOWNLIGHT 11W TITANIUM CRI^{SP} LED SERIES



APPLICATIONS

General Lighting

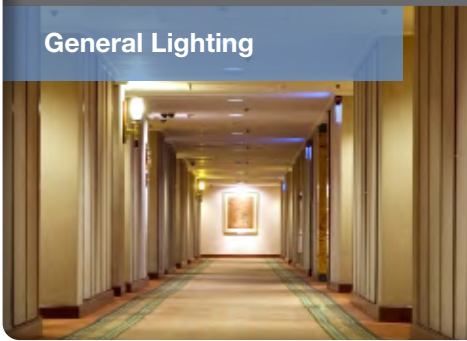

Recessed Lighting



Accent Lighting



Ref.#: DS199-CLICK-6-11W

SPECIFICATIONS

| Product Model | 58101 11SMDL6DIM/927 | 58102 11SMDL6DIM/930 | 58103 11SMDL6DIM/940 |
|------------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Type | 6" SMDL | 6" SMDL | 6" SMDL |
| Base | E26 / LED Adapter (GU24 optional) | E26 / LED Adapter (GU24 optional) | E26 / LED Adapter (GU24 optional) |
| Power (W) | 11 | 11 | 11 |
| Voltage - Frequency | 120V 60Hz | 120V 60Hz | 120V 60Hz |
| Color Temp. (ANSI) | Soft White 2700K | Warm White 3000K | Cool White 4000K |
| CRI (Ra) | 90 | 90 | 90 |
| Typical lumens (lm) | 680 | 720 | 750 |
| Efficacy (LPW) | 62 | 65 | 68 |
| Beam Angle | 110° | 110° | 110° |
| Dimmable | Yes*** | Yes*** | Yes*** |
| Housing Compatibility | 4" J-box / Most 5-6" housing | 4" J-box / Most 5-6" housing | 4" J-box / Most 5-6" housing |
| Power Factor | 0.9 | 0.9 | 0.9 |
| Rated Lifetime - L70 (hrs.) | 40,000 | 40,000 | 40,000 |
| Dia. x MOL | 7.32"x1.30" (186x33mm) | 7.32"x1.30" (186x33mm) | 7.32"x1.30" (186x33mm) |
| Weight (lb. / g) | 0.45lb. / 204g | 0.45lb. / 204g | 0.45lb. / 204g |

ACCESSORIES (SOLD SEPARATELY)

| Product Model | 57973 SMDL4/ACC | 57974 SMDL6/ACC |
|---------------|---------------------------------|-----------------------------------|
| Type | 4" Can Installation Accessories | 5-6" Can Installation Accessories |

* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$4 incandescent with 1000-hr lifetime, \$25 LED with 40,000-hr lifetime

** Suitable for closet installation when installed in accordance with NEC requirements

*** List of tested dimmer switches available on website