

Project Name:	Type:
Part Number:	Date:

# PAR30 19.5W HO 277V

## FEATURES


- Replaces 75W Halogen & 39W CMH lamps
- Direct line voltage 120-277V - Not compatible with ballasts
- High 8,160 candela output
- Powerful light output of 1,800 lumens
- Exceptional efficacy 92 LPW in Warm White
- Exceptional color rendering CRI 92
- Even beam distribution
- Not intended for use in totally enclosed fixtures
- Suitable for use in damp locations
- Fixture Operating Temperature: -4°F to 95°F (-20°C to 35°C)  
Lamp Ambient Temperature: -4°F to 113°F (-20°C to 45°C)
- Rated Lifetime (L70): 50,000hrs
- 5 year limited warranty



## SPECIFICATIONS

Product	Model	CCT	Wattage	Lumens	Efficacy (LPW)	Power Factor	Input Voltage	Beam Angle	CBCP (cd)	CRI	ES / T20
98206	19.5PAR30HO/930NF25/277V/R	3000K	19.5	1,800	92	≥0.9	120-277V	NF 25°	8,160	92	√/√
98207	19.5PAR30HO/930FL40/277V/R	3000K	19.5	1,800	92	≥0.9	120-277V	FL 40°	3,400	92	√/√
35429	19.5PAR30HO/935NF25/277V/R	3500K	19.5	1,800	92	≥0.9	120-277V	NF 25°	8,160	92	√/√
35430	19.5PAR30HO/935FL40/277V/R	3500K	19.5	1,800	92	≥0.9	120-277V	FL 40°	3,400	92	√/√
98208	19.5PAR30HO/940NF25/277V/R	4000K	19.5	1,800	92	≥0.9	120-277V	NF 25°	8,160	92	√/√
98209	19.5PAR30HO/940FL40/277V/R	4000K	19.5	1,800	92	≥0.9	120-277V	FL 40°	3,400	92	√/√

## DIMENSION & WEIGHT

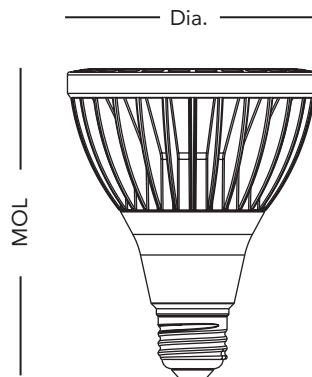

Base	E26
MOL	4-11/16"
Dia.	3-3/4"
Weight	0.89lb



# PAR30 19.5W HO 277V


## MINIMUM COMPARTMENT DIMENSIONS

Model	Diameter	Height
19.5PAR30HO/xxxyy/277V/R	6"	8-1/2"


Installing lamp in a fixture that does not have the minimum compartment dimensions will void the warranty and could cause product failures.  
 Where xxx means 824-965 which indicates CRI and color temperature  
 Where yyyy means beam angle

## ILLUMINANCE & CANDELA DISTRIBUTIOIN

19.5PAR30HO/930NF25/277V/R

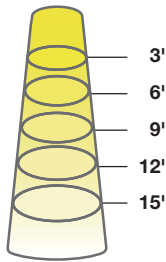


Diameter	Footcandles
1.3	907
2.7	227
4.0	101
5.3	57
6.7	36




Degree	Candela
0	8,160
5	6,726
15	2,339
25	603
35	232
45	94

19.5PAR30HO/930FL40/277V/R

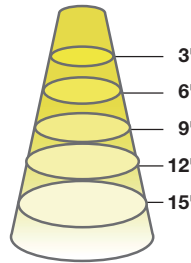

Diameter	Footcandles
2.2	378
4.4	94
6.6	42
8.7	24
10.9	15



Degree	Candela
0	3,400
5	3,303
15	2,193
25	896
35	258
45	88