



DIRECT T8 VALUE SELECT


MODEL

Model: 13T8/4F/xxx/IS/DIR

10.5T8/4F/xxx/IS/DIR

Where xxx means 824-965 which indicates

CRI and color temperature

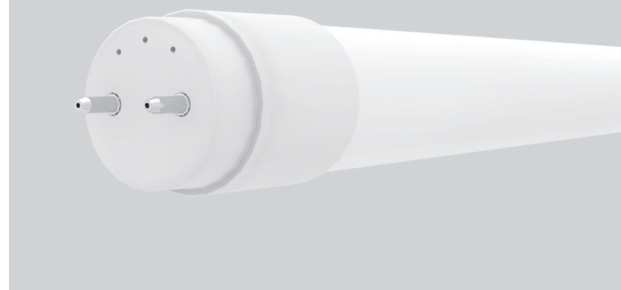

ELECTRONIC BALLAST COMPATIBILITY

Brand	Model	Compatibility
Bodline	B30ST	OK
	B50	OK
	B54	OK
	B60	OK
	B100	OK
	LP550	OK
	LP600	OK
Iota	I-42-EM-R-J	OK
	ICE-80	OK
	I-320	OK
	I-232	OK
	I-62	OK
	I-32	OK
	ISL-54	OK
	ISL-540	OK
	ISD-80	OK
Lithonia	EI500	X
	PSQ500QD	OK
	PS1400QD	OK
Fulham	FH4-DUAL-700L	OK
	FH3-DUAL-450L	OK
	FH5-DUAL-1400L	OK
ALP	EFP 32GS	OK

OK- Compatible X-Not compatible

*GREEN CREATIVE has provided this emergency ballast compatibility chart for guidance when selecting an emergency ballast and lamp combination. Lamps were tested for compatibility with the above listed emergency ballasts. Emergency ballasts that do not appear on the chart might still be compatible but have not been tested. All testing has been performed with a stable main supply. The quality of the local main, existing installation and wiring, as well as different manufacturer versions of the above emergency ballasts may affect lamp performance. Since no assurance can be provided regarding these factors, it is a general recommendation to perform a test on-site prior to installing the LED lamps.