

# MINIFIT GIMBAL

  
GREENCREATIVE

**miniFIT**  
SERIES



## FEATURES

- Small 1" and 2" light aperture
- Compact form factor and easy installation
- Gimbals rotate 360° and tilt up to 30°
- Up to 600 lumens delivered
- 2700K, 3000K and 4000K CCT, 90 CRI
- 120V line voltage dimmable down to 10%
- Ambient temperature rating: -4°F / -20°C to 95°F / 35°C
- Suitable for use in damp locations
- IC and air-tight rated
- Rated L70 lifetime of 50,000 hours
- ETL listed
- 5 year warranty



## RESIDENTIAL



- Residential
- Hospitality
- Retail
- Office



## BENEFITS




## ADJUSTABLE FIXTURE AIMING

Get the right light in the right place with the miniFIT gimballs. The gimballs come with a 38° beam acrylic optic, producing a consistent, precise beam of light. In addition, they rotate 360° and tilt up to 30° so you can mount them in any orientation in the ceiling and still aim the light to graze textured walls, highlight artwork, or emphasize architectural features. Perfect for residential, retail and hospitality applications.

## QUICK AND EASY INSTALLATION


The miniFIT family is quick and easy to install. Connecting power in the external junction box is a breeze with the push in connectors. Wiring the fixture is even easier with the plenum rated quick connector. The optional new construction plates, keyhole mounting slots and spring clip hooks allow for a simple installation and compliance with local building codes. The sturdy spring action clips will keep the fixture tight to the ceiling, ensuring an aesthetically pleasing installation.

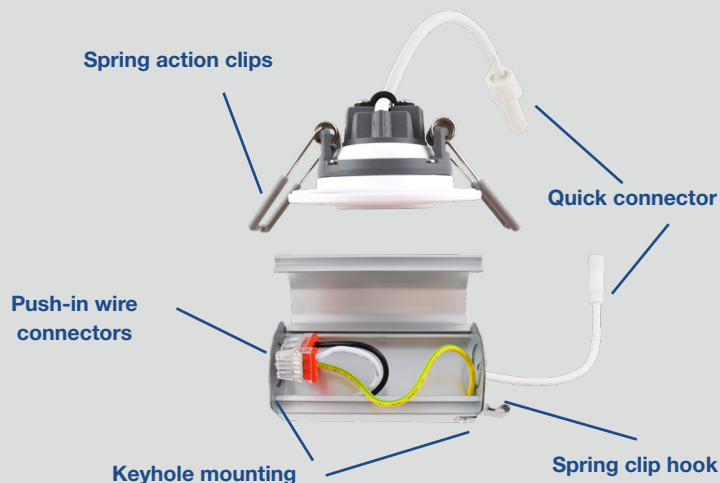

## ORDERING

Series	Size	CRI	CCT	Beam Angle	Dimming
<input checked="" type="checkbox"/> <b>GIMB</b>	<input type="checkbox"/> <b>1</b>	<input checked="" type="checkbox"/> <b>9</b>	<input type="checkbox"/> <b>27</b>	<input checked="" type="checkbox"/> <b>FL</b>	<input checked="" type="checkbox"/> <b>DIM120</b>
GIMBAL	1" 400lm	CRI 90	2700K	Flood 38°	120V - Line voltage dimming
	<input type="checkbox"/> <b>2</b>		<input type="checkbox"/> <b>30</b>		
	2" 600lm		3000K		
			<input type="checkbox"/> <b>40</b>		
			4000K		

CCT	2700K		3000K		4000K	
Model	Lm	LPW	Lm	LPW	Lm	LPW
GIMB1/9xx/FL/DIM120	320	68	350	73	390	78
GIMB2/9xx/FL/DIM120	580	73	600	75	620	78

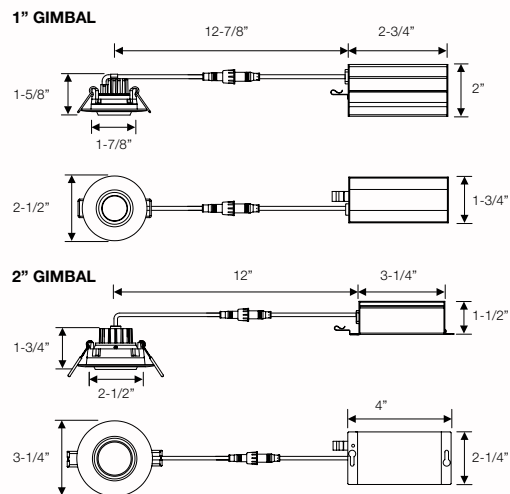

## ACCESSORY ORDERING INFORMATION

Product	Model	Picture	Description	Dimensions
98584	GIMB1NOPLATE		MINIFIT Gimbal 1" New Construction Plate for Stud / Joist mounting	6-7/16" x 13-5/16"
98585	GIMB2NOPLATE		MINIFIT Gimbal 2" New Construction Plate for Stud / Joist mounting	
35097	GIMBCON6		MINIFIT Gimbal 6 foot extension cable	6'
35098	GIMBCON20		MINIFIT Gimbal 20 foot extension cable	20'