



GREENCREATIVE

 LUMINAIRES




CATALOG



GREENCREATIVE

Your partner for professional lighting solutions

GREEN CREATIVE, founded in 2010, is a solid-state lighting development and manufacturing company based in Sanford, FL with an office in Shanghai. The company offers a comprehensive line of high-performance LED Lamp, Downlight and Track lighting solutions, widely adopted by some of the largest companies in the world.

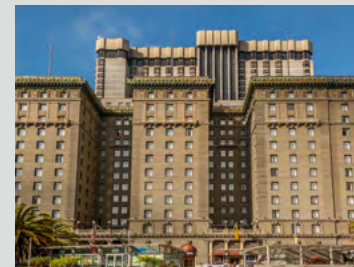

Bringing you the latest in LED technology

Anchored by strong integrated R&D capabilities and patented technology, Our innovation, performance and reliability have been recognized year after year by the Illuminating Engineering Society Progress Report, the LEDs Magazine Sapphire Awards, Edison Report, NAILD and more.

A complete line with national & international distribution

GREEN CREATIVE's full product line of ENERGY STAR®, DLC®, TITLE 20 & JA8 certified indoor retrofit and new construction lighting solutions serves the Retail, Hospitality, Food & Beverage, Office, Education & Industrial sectors through multiple distribution centers and sales networks across the USA.

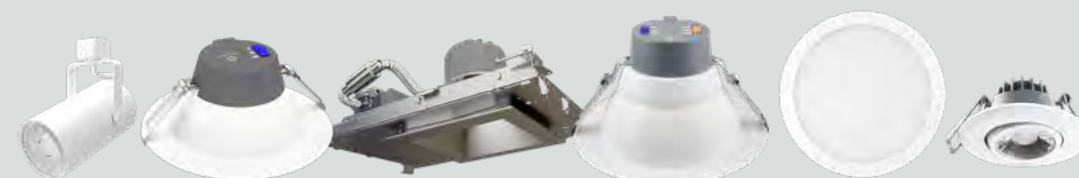


TABLE OF CONTENTS

COMMERCIAL & CYLINDER DOWNLIGHTING P1-10



PXCYL
P1-2



SPECFIT
P3-6



SELECTFIT
P7-8



INNOFIT
P9-10

NEW CONSTRUCTION DOWNLIGHTING P11-18



MINIFIT
P11-14



THINFIT EXT
P15-16



THINFIT
P17-18

SURFACE DOWNLIGHTING P19-26



3N1
P19-20



CLICK WITH SENSOR
P21-22



CLICK
P23-24



CLICK ROUND
P25



CLICK SQUARE
P26

RESIDENTIAL DOWNLIGHTING P27-28



RDL
P27-28

TRACK P29-34



ORBIT
P29-30



ATOM
P31-32



TRACK SYSTEM
P33-34

2022 FEATURED PRODUCTS



NEW!

P1-2

PXCYL CYLINDER

- 2", 4", 6" & 8" form factors
- Selectable lumen output
- Variety of installation options



NEW!



P3-6

SPECFIT

- The best in the class
- Wet location addition
- For both remodel and new constructions



P29-30

ORBIT TRACK

- Field selectable lumen output
- Up to 4,000 lumens delivered
- CBCP of up to 32,000 candela



NEW!



P31-32

ATOM TRACK

- Compact form factor
- Industry-leading performance
- Patent pending modular design

CYLINDER DOWNLIGHT - PXCYL



SPECIFICATIONS										
Frame Housing	Mounting	Light Engine¹		CRI	CCT	Driver	Optical Distribution	Cylinder Finish	Reflector Finish	Options
PXCYL2 2" PXCYL Cylinder	SM Surface Mount	SelectDrive Light Engines LES Small Light Engine 500-700-1000 lumens		90 90+ CRI	27 ⁵ 2700K	SelectDrive Drivers KDIM120V SelectDrive 120V, 50/60Hz Forward/ Reverse phase dimming	SP Spot 15°	WH Matte White	CC Clear	EM-INT⁷ 6W Integrated EM Backup CEC Compliant
PXCYL4 4" PXCYL Cylinder	CM ² Cable Mount Ready	LEM Medium Light Engine 1500-2000-2500 lumens		97 ⁴ 97 CRI 3000K only	30 3000K	KDIM010UNV SelectDrive 120-277V, 50/60Hz 0-10V dimming	VN Very Narrow 25°	BL Matte Black	WH White	WET¹¹ Wet Location Ready
		LEL Large Light Engine 3000-4000-5000 lumens				Fixed Output Drivers				
PXCYL6 6" PXCYL Cylinder	PM ² Pendant Mount Ready	Fixed Output Light Engines³			35 3500K	PSRUNV 0-10V Driver + SR Ready Bridge, 120-277V XT010UNV Signify 0-10V Driver 1% Dimming, 120-277V	NR Narrow 40°	CZ ⁶ Customized	CZ ⁶ Customized	ES ⁸ Philips EasySense ceiling mount sensor
PXCYL8 8" PXCYL Cylinder	WM Wall Mount	LE05 500 lumens	LE25 2500 lumens		40 4000K	LUT-1UNV Lutron EcoSystem 1% Dimming, 120-277V LUT-5UNV Lutron EcoSystem 5% Dimming, 120-277V	MD Medium 60°			ENLS ⁹ - IL Enlighted Two Wire ENLIGHTED ONE Compact Sensor
	WMUP Wall Mount Up Lighting	LE07 700 lumens	LE30 3000 lumens			LUT-L3DUNV Lutron Hi-lume 3-Wire 1% Dimming, 120-277V ELD-E010UNV EldoLED ECOdrive 0-10V 1%, 120-277V				
		LE10 1000 lumens	LE40 4000 lumens		50 ⁵ 5000K	LUT-L3DUNV Lutron Hi-lume 3-Wire 1% Dimming, 120-277V ELD-E010UNV EldoLED ECOdrive 0-10V 1%, 120-277V	WD Wide 75°			ENLS ⁹ - CL Enlighted Two Wire CONNECTED LIGHTING Compact Sensor
		LE15 1500 lumens	LE50 5000 lumens			ELD-EDALIUNV EldoLED ECOdrive DALI 1%, 120-277V				
	TJPM ¹⁰ Track J-Type Suspended Mount	LE20 2000 lumens				ELD-S010UNV EldoLED SOLOdrive 0-10V 0.1%, 120-277V ELD-SDALIUNV EldoLED SOLOdrive DALI 0.1%, 120-277V OSRDIM010347V Osram OPTOTRONIC 0-10V 1%, 347V				ENLS ⁹ - IOT Enlighted Two Wire IOT Compact Sensor

¹ Small light engine is available for 2", 4", 6" & 8" cylinders. Medium light engine is available for 4", 6" & 8" cylinders. Large light engine is available for 6" & 8" cylinders. ² Cable and Pendant Mount ready for Stem or Cable Suspension, order Canopy type and length separately. ³ Fixed output light engines are only available with fixed output drivers. LE05 is not available with LUT-5UNV. LE50 is not available with LUT-5UNV and LUT-1UNV. ⁴ CRI97 TRUE CHROMA is available in 3000K only and may be subject to minimum order quantities. Please consult the factory for details. ⁵ 2700K and 5000K are not standard CCT and might be subjected to longer lead time, contact factory for detail. ⁶ Please contact factory for customized color or cable length for feasibility. ⁷ EM-INT is integrated Emergency unit, factory installed, with test button on the Cylinder. Available for 6" and 8" cylinders only. Fixture with EM-INT should be installed in a controlled environment with ambient temperature not exceeding 77°F (25°C). ⁸ Philips EasySense ceiling mounted sensor is only available with the PSRUNV driver. Not available for 2" cylinder. ⁹ Enlighted Two Wire Compact Sensor with ceiling mount is only available with the PSRUNV driver. Not available for 2" cylinder. ¹⁰ Only for 2" PXCYL cylinder. ¹¹ WET location are available only for Surface Mounted and Wall Mount downlighting under covered ceiling.

CYLINDER DOWNLIGHT - PXCYL



Redefine clarity
A versatile cylinder with brilliant performance


Additional Controls




Driver & Control Options




5 Color Temperatures




3 Lumen Packages

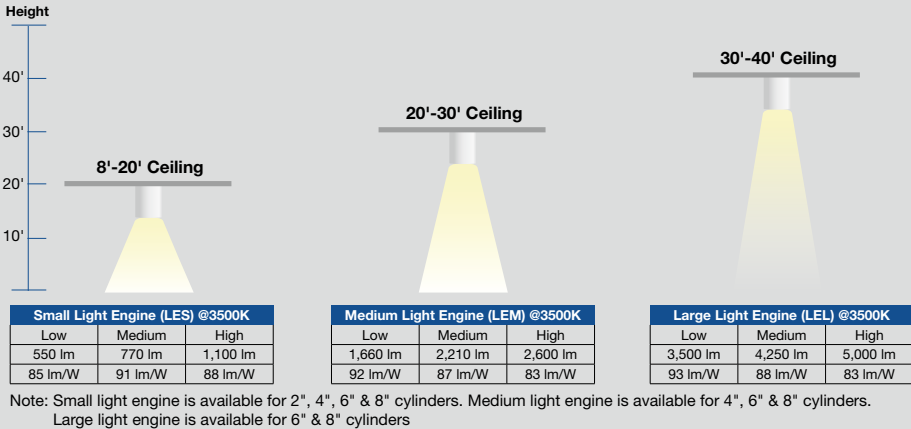

5 Beam Angles

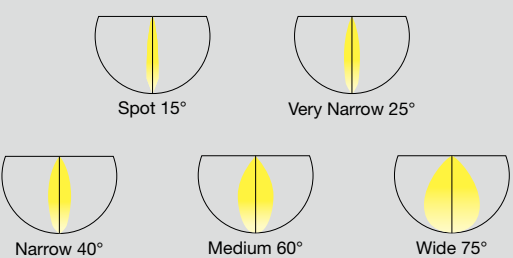

Deep Cutoff



COMMERCIAL DOWNLIGHT - SPECFIT

COMMERCIAL DOWNLIGHT - SPECFIT



NEW!



SPECIFICATIONS

Light Engine and Driver


Light Engines	CRI	CCT	Driver		Optical Distribution	Options ⁵
SelectDrive Light Engines ¹	90	27	SelectDrive Drivers		MD ⁴	SD347
LES	90+ CRI	2700K	KDIM120V		Medium 60°	347V - 240V
Small Light Engine			120V, 50/60Hz		(Installed Standard)	Step Down Transformer
LEM			Forward/Reverse Phase dimming			
Medium Light Engine	97 ³	30	KDIM010UNV		SP	EM ⁶
1500-2000-2500 lumens	97 CRI	3000K	SelectDrive 120-277V,50/60Hz		Spot 15°	10.7W Emergency Backup
LEL	3000K only		0-10V dimming			
Large Light Engine		35	Fixed Output Drivers		VN	EM ⁶ -CEC
3000-4000-5000 lumens		3500K			Very Narrow 25°	California Title 20 Compliant
Fixed Output Light Engines ²						10.7W Emergency Backup
LE05		40	PSRUNV	ELD-E010UNV	NR	OUT
500 lumens		4000K	0-10V Driver + SR Ready	EldoLED ECOdrive	Narrow 40°	Outdoor Debris Ingress
LE25			Bridge, 120-277V	0-10V 1%, 120-277V		Protection
LE07					WD	ES ⁷
700 lumens					Wide 75°	Philips EasySense
LE10		50	XT010UNV	ELD-EDALIUNV		ceiling mount sensor
1000 lumens		5000K	Signify 0-10V Driver 1%	EldoLED ECOdrive		ENLS ⁸ -IL
LE15			Dimming, 120-277V	DALI 1%, 120-277V		Enlighted Two Wire
LE50						ENLIGHTED ONE
1500 lumens						Compact Sensor
LE20			LUT-1UNV	ELD-S010UNV		ENLS ⁸ -CL
2000 lumens			Lutron EcoSystem 1%	EldoLED SOLOdrive		Enlighted Two Wire
			Dimming, 120-277V	0-10V 0.1%, 120-277V		CONNECTED LIGHTING
						Compact Sensor
			LUT-5UNV	ELD-SDALIUNV		ENLS ⁸ -IOT
			Lutron EcoSystem 5%	EldoLED SOLOdrive		Enlighted Two Wire
			Dimming, 120-277V	DALI 0.1%, 120-277V		IOT Compact Sensor
						WET
			LUT-L3DUNV			Wet location option
			Lutron Hi-lume 3-Wire 1%			
			Dimming, 120-277V			

Reflector


Shape & Size				Finish	
ADR4	ADS4 ¹⁰	ADR6	ADS6 ¹⁰	CC	WH
4" Round	4" Square	6" Round	6" Square	Clear Diffuse Trim and Flange	Matte White Trim and Flange
ADR8		ADR9.5		CW	BL ⁹
8" Round		9.5" Round		Clear Diffuse Trim, White Flange	Matte Black Trim and Flange

¹ Small Light Engine is not available with the ADR9.5 reflector, Large Light Engine is not available with the ADR4 reflector. / ² Fixed output light engines are only available with DIM120V, PSRUNV, LUT-5UNV, or LUT-1UNV dimming drivers. LE05 is not available with LUT-5UNV. LE50 is not available with LUT-5UNV and LUT-1UNV. LE30, LE40 and LE50 light engines are not available for use with ADR4 reflector. / ³ CRI97 TRUE CHROMA is available in 3000K only and may be subject to minimum order quantities. Please consult the factory for details. / ⁴ Medium Lens Optic comes installed as standard, alternate optics will ship separately and require field installation. / ⁵ Options are factory installed and come with the Light Engine and Driver. / ⁶ EM cannot be combined with SD347 or SD480 option. / ⁷ ES only available with PSRUNV Driver. / ⁸ Enlighted Two Wire Compact Sensor with ceiling mount is only available with the PSRUNV driver. / ⁹ The Black reflector is only available for ADR4 and ADR6 reflectors. ¹⁰ ADS4 and ADS6 are available in CC and WH finishes only.

CHOICE OF MULTIPLE OPTICS

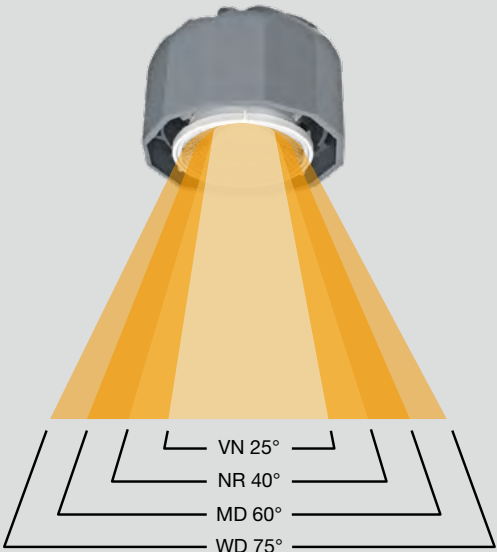

- Field interchangeable optics
- Selectable light output
- 97 CRI modules meet TRUE CHROMA standard
- Multiple reflector options - CC, CW, WH & BL

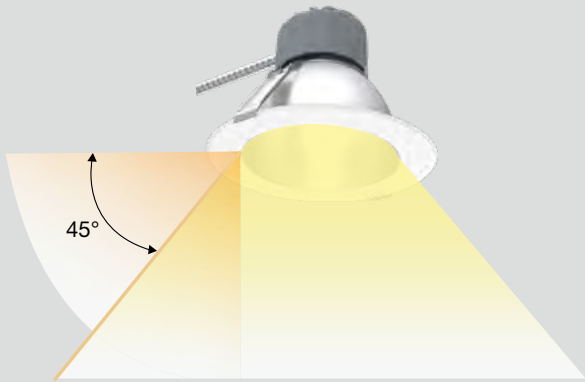

OPTICAL CUTOFF

45° optical cutoff provide a quiet ceiling with minimal glare and maximum efficiency.

SELECTABLE LIGHT OUTPUT



LES & LEM
LES - 500/700/1000 Lumens
LEM - 1500/2000/2500 Lumens



LEL
LEL - 3000/4000/5000 Lumens



SelectDrive Technology - Adjustable Lumen Output



UNIVERSAL ADJUSTABLE




ADDITIONAL CONTROLS

Take even more control of SPECFIT fixtures with a variety of control system options. These include the Lutron 5-Series Ecosystem driver which provides smooth dimming to 5% and the Lutron Hi-Lume 1% EcoSystem driver with Soft-On, Fade-to-Black which dims to 1%. EldoLED ECOdrive and SOLOdrive drivers available in 0-10V and DALI configurations and dim smoothly to 1% and 0.1% respectively. Additional sensors such as enlightened compact sensors and Philips EasySense sensors, can be field installed and directly integrate with the factory provided Philips Xitanium driver and Sensor Ready Bridge.




ACCESSORIES

Product	Model	Description
98079	ADWAW	Wall Wash Accessory
98569	GOOFRING4	4" Goof Ring - Outer Diameter 8-1/8"
98568	GOOFRING6	6" Goof Ring - Outer Diameter 10-1/2"
98567	GOOFRING8	8" Goof Ring - Outer Diameter 12-1/2"
98566	GOOFRING9.5	9.5" Goof Ring - Outer Diameter 14-3/16"

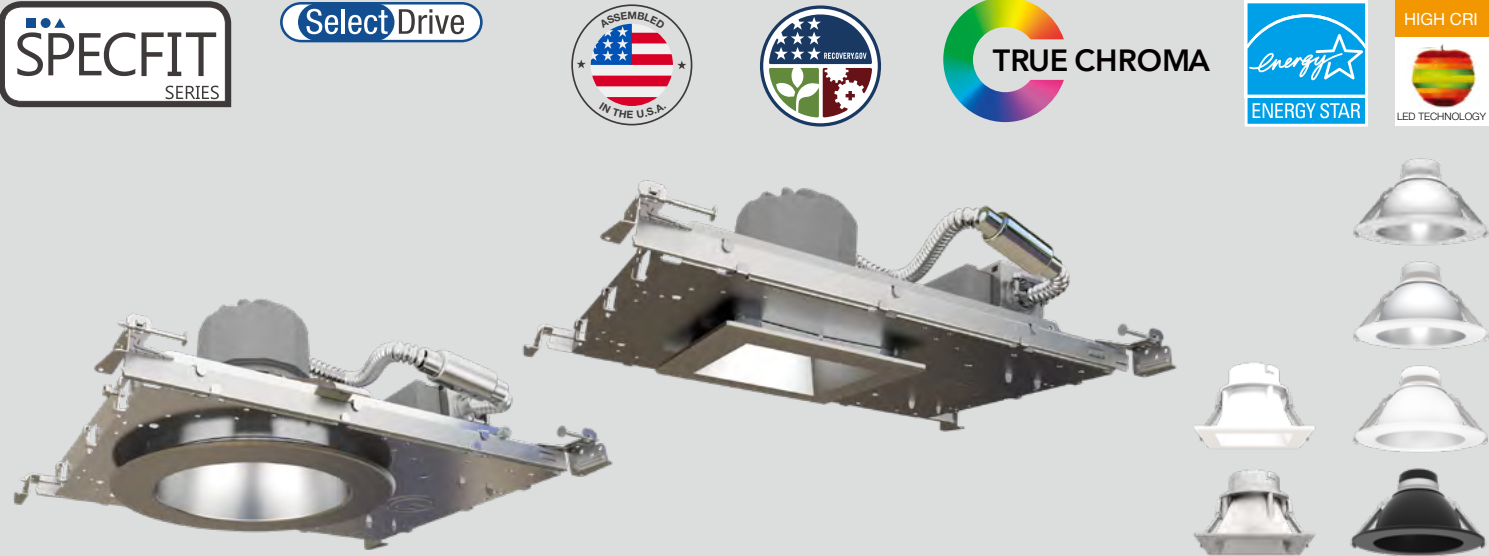

SPECIFICATIONS						
Light Engine and Driver						
Frame Housing	Light Engines		CRI	CCT	Driver	Options ⁵
SPFTR4 4" SPECFIT Round New Construction	SelectDrive Light Engines¹ LES Small Light Engine 500-700-1000 lumens		90 90+ CRI	27 2700K	SelectDrive Drivers KDIM120V 120V, 50/60Hz Forward/Reverse Phase dimming	MD⁴ Medium 60° (Installed Standard)
SPFTR6 6" SPECFIT Round New Construction	LEM Medium Light Engine 1500-2000-2500 lumens		97³ 97 CRI 3000K only	30 3000K	KDIM010UNV SelectDrive 120-277V,50/60Hz 0-10V dimming	SP Spot 15°
SPFTR8 8" SPECFIT Round New Construction	LEL Large Light Engine 3000-4000-5000 lumens			35 3500K	Fixed Output Drivers PSRUNV 0-10V Driver + SR Ready Bridge, 120-277V XT010UNV Signify 0-10V Driver 1% Dimming, 120-277V LUT-1UNV Lutron EcoSystem 1% Dimming, 120-277V LUT-5UNV Lutron EcoSystem 5% Dimming, 120-277V LUT-L3DUNV Lutron Hi-lume 3-Wire 1% Dimming, 120-277V	VN Very Narrow 25°
SPFTR9.5 9.5" SPECFIT Round New Construction	Fixed Output Light Engines² LE05 500 lumens			40 4000K		NR Narrow 40°
SPFTS4 4" SPECFIT Square New Construction	LE07 700 lumens	LE30 3000 lumens		50 5000K		WD Wide 75°
SPFTS6 6" SPECFIT Square New Construction	LE10 1000 lumens	LE40 4000 lumens				
	LE15 1500 lumens	LE50 5000 lumens				
	LE20 2000 lumens					
Reflector						
Shape & Size				Finish		
ADR4 4" Round	ADS4¹⁰ 4" Square	ADR6 6" Round	ADS6¹⁰ 6" Square	CC Clear Diffuse Trim and Flange		WH Matte White Trim and Flange
ADR8 8" Round		ADR9.5 9.5" Round		CW Clear Diffuse Trim, White Flange		BL⁹ Matte Black Trim and Flange

¹ Small Light Engine is not available with the ADR9.5 reflector, Large Light Engine is not available with the ADR4 reflector. / ² Fixed output light engines are only available with fixed output drivers. LE05 is not available with LUT-5UNV. LE50 is not available with LUT-5UNV and LUT-1UNV. LE30, LE40 and LE50 light engines are not available for use with ADR4 reflector. / ³ CRI97 TRUE CHROMA is available in 3000K only and may be subject to minimum order quantities. Please consult the factory for details. / ⁴ Medium Lens Optic comes installed as standard, alternate optics will ship separately and require field installation. / ⁵ Options are factory installed and come with the Light Engine and Driver. / ⁶ EM cannot be combined with SD347 or SD480 option. / ⁷ ES only available with PSRUNV Driver. / ⁸ Enlighted Two Wire Compact Sensor with ceiling mount is only available with the PSRUNV driver. / ⁹ The Black reflector is only available for ADR4 and ADR6 reflectors. ¹⁰ ADS4 and ADS6 are available in CC and WH finishes only.


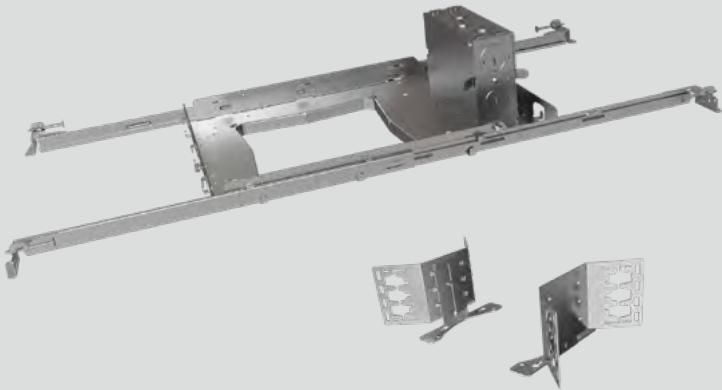


NEW CONSTRUCTION FRAME

The SPECFIT new construction frames, made of the highest quality galvanized steel, are designed to be installed in suspended T-grid or wood joist ceilings. The low profile bar hangers with non-pass through construction and leveling flanges contain an integral tee bar clip and preinstalled nail, quick and safe installation in standard 2x2' and 2x4' suspended ceilings. The attached junction box and prewired driver, with quick connect MC cable allows for easy fixture wiring. Optional field installable butterfly brackets are also available for C-Channel or conduit suspension. EM unit can be factory installed on demand with a specifically designed bracket.

TRUE CHROMA

SPECFIT, powered by TRUE CHORMA technology, has the highest color accuracy standard in the market. TRUE CHROMA starts with a maximum 3 step SDCM LED light source. Then, based on the traditional CRI and new IES TM-30-15 standards, TRUE CHROMA delivers CRI ≥ 95, R9 ≥ 50 and Rf ≥ 93. Rest assured that new spaces lit with SPECFIT fixtures powered by TRUE CHROMA will look their best.

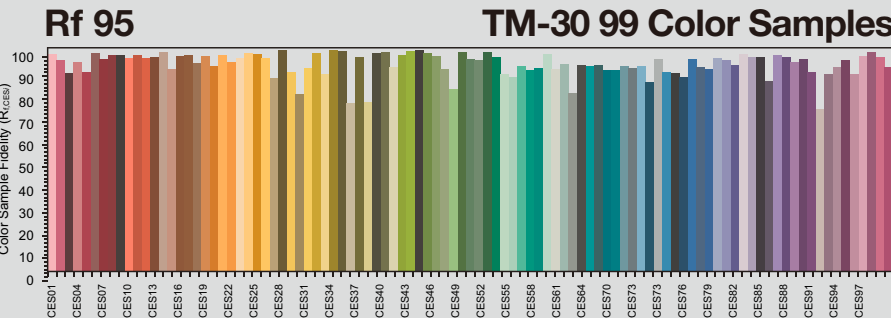

Rf: 95, Rg: 100

ACCESSORIES		
Product	Model	Description
98079	ADWAW	Wall Wash Accessory
35126	NCFBFB	Set of Two Field Installable Butterfly Brackets For New Construction Rough-in Frame
35125	NCFEMB	Field Installable Emergency Bracket For New Construction Rough-in Frame



SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	ES
98539	SLFT4/80CCTS/DIM120V	3000/3500/4000K	500/700/1,000	80	100/105/100	120V	7W - 1x13W 9W - 1x18W 12W - 1x26W	90°	50,000	120V	✓
98540	SLFT4/80CCTS/DIM010UNV	3000/3500/4000K	500/700/1,000	80	100/105/100	0-10V		90°	50,000	120-277V	✓
98541	SLFT4/80CCT2750/DIM010UNV	2700/5000K	500/700/1,000	80	100/103	0-10V		90°	50,000	120-277V	✓
98542	SLFT6/80CCTS/DIM120V	3000/3500/4000K	700/1,000/1,500	80	100/105/100	120V	8W - 1x18W 10W - 1x26W 15W - 1x32W	90°	50,000	120V	✓
98543	SLFT6/80CCTS/DIM010UNV	3000/3500/4000K	700/1,000/1,500	80	100/105/100	0-10V		90°	50,000	120-277V	✓
98544	SLFT6/80CCT2750/DIM010UNV	2700/5000K	700/1,000/1,500	80	100/103	0-10V		90°	50,000	120-277V	✓
98545	SLFT8/80CCTS/DIM120V	3000/3500/4000K	1,000/1,500/2,000	80	100/105/100	120V	11W - 1x26W 15W - 1x32W 19W - 1x42W/2x26W	90°	50,000	120V	✓
98546	SLFT8/80CCTS/DIM010UNV	3000/3500/4000K	1,000/1,500/2,000	80	100/105/100	0-10V		90°	50,000	120-277V	✓
98547	SLFT8/80CCT2750/DIM010UNV	2700/5000K	1,000/1,500/2,000	80	100/103	0-10V		90°	50,000	120-277V	✓
98548	SLFT9.5/80CCTS/DIM120V	3000/3500/4000K	2,000/2,500/3,200	80	100/105/100	120V	18W - 1x42W/2x26W 23W - 1x57W/2x32W 30W - 2x42W	90°	50,000	120V	✓
98549	SLFT9.5/80CCTS/DIM010UNV	3000/3500/4000K	2,000/2,500/3,200	80	100/105/100	0-10V		90°	50,000	120-277V	✓
98550	SLFT9.5/80CCT2750/DIM010UNV	2700/5000K	2,000/2,500/3,200	80	100/103	0-10V		90°	50,000	120-277V	✓

SELECTABLE CCT

Make retrofit projects easier with the SELECTFIT commercial downlight family of fixtures, powered by SelectKelvin technology. Select the CCT before, during or after installation with just the flip of a switch and never worry about having the correct CCT for a project again.



SELECTABLE LIGHT OUTPUT

Get the right amount of light with SELECTFIT, powered by SelectDrive technology. Choose either Low, Medium or High light output, equivalent to various CFL lamp combinations. With just the flip of a switch ensure that every space has just the right amount of light.


- For retrofit or new construction installation
 - 120V Forward phase (TRIAC) / Reverse phase (ELV) or 0-10V Dimmable
- Innovative design saves time & materials
 - IC and Air-tight Rated

QUALITY, DURABILITY AND SIMPLICITY



ACCESSORIES

Product	Model	Description
98569	GOOFRING4	4" Goof Ring - Outer Diameter 8-1/8"
98568	GOOFRING6	6" Goof Ring - Outer Diameter 10-1/2"
98567	GOOFRING8	8" Goof Ring - Outer Diameter 12-1/2"
98566	GOOFRING9.5	9.5" Goof Ring - Outer Diameter 14-3/16"
35157	SLFT/TRIM4/CC	4" Clear Trim Insert
35158	SLFT/TRIM6/CC	6" Clear Trim Insert
35159	SLFT/TRIM8/CC	8" Clear Trim Insert
35160	SLFT/TRIM9.5/CC	9.5" Clear Trim Insert
98501	NCPLATE/T4689	New Construction or Remodel Plate for T-Grid ceilings for use with 4", 6", 8" and 9.5" models
98502	NCPLATE468	New Construction Plate for Stud/Joist mounting for use with 4", 6" and 8" models
98583	NCPLATEJB	Additional J-Box for new construction plate installation
35121	NCFJB4	Round New Construction Frame w/ Jbox 4"
35122	NCFJB6	Round New Construction Frame w/ Jbox 6"
35123	NCFJB8	Round New Construction Frame w/ Jbox 8"
35124	NCFJB9.5	Round New Construction Frame w/ Jbox 9.5"
35125	NCFEMB	Emergency Bracket For New Construction Frame
35126	NCFBFB	Butterfly Brackets For New Construction Frame
58012	35EMINVERTER	35W Emergency Inverter for use with 4", 6" and 8" models only
58013	35EMINVERTER/CEC	California Title 20 Compliant 35W Emergency Inverter for use with 4", 6" and 8" models only
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver for use with 4", 6" and 8" models only
98235	50EMINVERTER	50W Emergency Inverter for use with 9.5" model

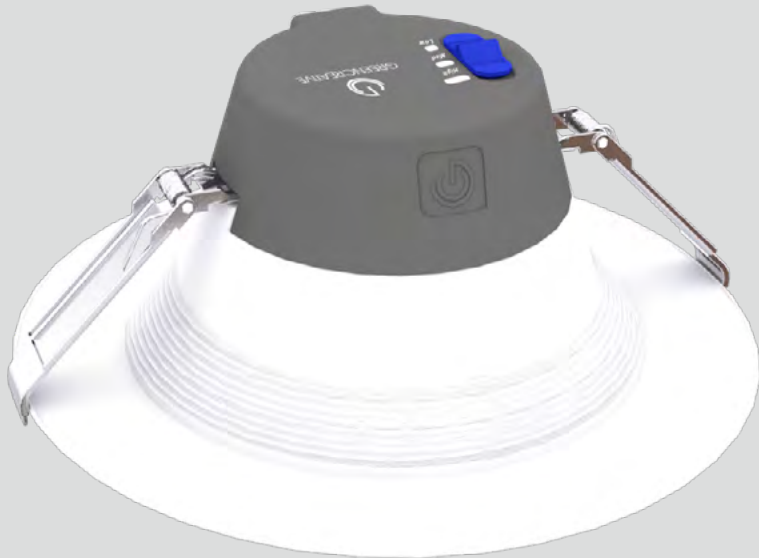

SPECIFICATIONS				
Series	Size	CRI	CCT	Dimming
INFT INNOFIT	4 4" 500 / 700 / 1,000 lumens	8 CRI 80	27 2700K	DIM010UNV 120-277V, 0-10V dimming
	6 6" 800 / 1,100 / 1,600 lumens		30 3000K	DIM120V 120V Line voltage dimming
	8 8" 1,100 / 1,500 / 2,200 lumens		35 3500K	
	9.5 9.5" 2,200 / 2,700 / 3,500 lumens		40 4000K	
			50 5000K	

Industry-Leading Efficacy

The new generation of INNOFIT offers the highest efficacy on the market for downlight products. At up to 130 lumens per watt, the INNOFIT creates powerful ROI savings from the moment it is installed.

- For retrofit or new construction installation
- Adjustable lumen output - 3 defined light levels
- 120V or 0-10V dimmable
- IC, Air-tight, and Wet Location Rated



Adjustable Lumen Output

Our SelectDrive technology allows you to easily adjust the light output. Choose low, medium, or high to ensure that each space has just the right amount of light.

SelectDrive Technology - Adjustable Lumen Output



QUALITY, DURABILITY AND SIMPLICITY


Spring clips for easy installation

0-10V or 120V forward and reverse-phase dimmable

Fit shallow plenums, 3-1/4" maximum fixture depth

Suitable for wet locations

IC-rated Airtight housing

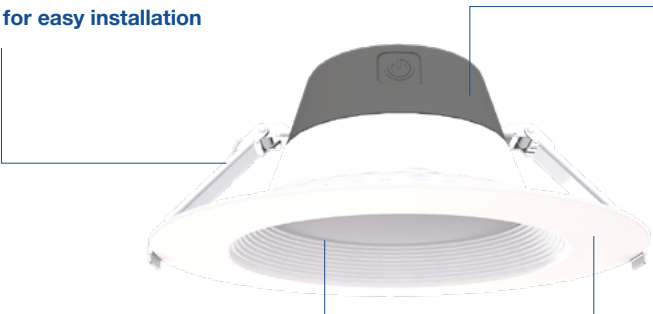

ACCESSORIES

Product	Model	Description
98569	GOOFRING4	4" Goof Ring - Outer Diameter 8-1/8"
98568	GOOFRING6	6" Goof Ring - Outer Diameter 10-1/2"
98567	GOOFRING8	8" Goof Ring - Outer Diameter 12-1/2"
98566	GOOFRING9.5	9.5" Goof Ring - Outer Diameter 14-3/16"
35121	NCFJB4	Round New Construction Frame w/ Jbox 4"
35122	NCFJB6	Round New Construction Frame w/ Jbox 6"
35123	NCFJB8	Round New Construction Frame w/ Jbox 8"
35124	NCFJB9.5	Round New Construction Frame w/ Jbox 9.5"
35125	NCFEMB	Emergency Bracket For New Construction Frame
35126	NCFBFB	Butterfly Brackets For New Construction Frame
58012	35EMINVERTER	35W Emergency Inverter for use with 4", 6", 8" and 9.5" models
58013	35EMINVERTER/CEC	California Title 20 Compliant 35W Emergency Inverter for use with 4", 6", 8" and 9.5" models
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver for use with 4", 6" and 8" models only



SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	ES / JA8
98439	GIMB1/927/FL/DIM120	2700K	320	90	64	120V		38°	50,000	120V	N.A. / ✓
98440	GIMB1/930/FL/DIM120	3000K	350	90	70	120V	35W	38°	50,000	120V	✓ / ✓
98441	GIMB1/940/FL/DIM120	4000K	390	90	78	120V		38°	50,000	120V	✓ / ✓
98442	GIMB2/927/FL/DIM120	2700K	680	90	73	120V		38°	50,000	120V	✓ / ✓
98443	GIMB2/930/FL/DIM120	3000K	720	90	75	120V	50W	38°	50,000	120V	✓ / ✓
98444	GIMB2/940/FL/DIM120	4000K	750	90	78	120V		38°	50,000	120V	✓ / ✓




Adjustable Fixture Aiming

Get the right light in the right place with the MINIFIT gimballs. The gimballs come with a 38° beam acrylic optic, producing a consistent, precise beam of light. In addition, they rotate 360° and tilt up to 30° so you can mount them in any orientation in the ceiling and still aim the light to graze textured walls, highlight artwork, or emphasize architectural features. Perfect for residential, retail and hospitality applications.

Quick and Easy Installation

The MINIFIT family is quick and easy to install. Connecting power in the external junction box is a breeze with the push in connectors. Wiring the fixture is even easier with the plenum rated quick connector. The optional new construction plates, keyhole mounting slots and spring clip hooks allow for a simple installation and compliance with local building codes. The sturdy spring action clips will keep the fixture tight to the ceiling, ensuring an aesthetically pleasing installation.

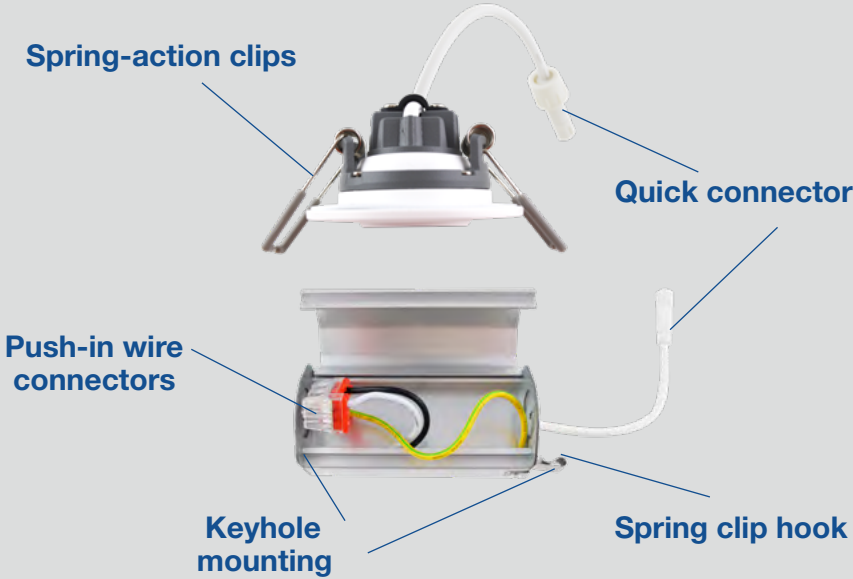

ACCESSORIES		
Product	Model	Description
98584	GIMB1NCPLATE	Gimbal 1" New Construction Plate for Stud / Joist mounting
98585	GIMB2NCPLATE	Gimbal 2" New Construction Plate for Stud / Joist mounting
35097	GIMBCON6	MINIFIT Gimbal 6 foot extension cable
35098	GIMBCON20	MINIFIT Gimbal 20 foot extension cable
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver



SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	ES / JA8
98571	MM2/927/FL/DIM120	2700K	720	90	90	120V	50W	38°	50,000	120V	✓ / ✗
98572	MM2/930/FL/DIM120	3000K	750	90	94	120V		38°	50,000	120V	✓ / ✗
98573	MM2/940/FL/DIM120	4000K	780	90	98	120V		38°	50,000	120V	✓ / ✗
98574	MM2/950/FL/DIM120	5000K	780	90	98	120V		38°	50,000	120V	✓ / ✗
98575	MM2T/RFT/OP/WH	MM2 Trim Round Flat - Open White									
98576	MM2T/RFT/OP/BM	MM2 Trim Round Flat - Open Brushed Metal									
98577	MM2T/RFT/GL/WH	MM2 Trim Round Flat - Glass Cover White									
98578	MM2T/RFT/GL/BM	MM2 Trim Round Flat - Glass Cover Brushed Metal									
98579	MM2T/RDT/OP/WH	MM2 Trim Round Deep - Open White									
98580	MM2T/RDT/PN/WH	MM2 Trim Round Deep - Pinhole White									
98581	MM2T/RDT/WW/WH	MM2 Trim Round Deep - Wall Wash White									




Extensive Trim Selection

The 2" MINIFIT modules have a variety of field interchangeable trim options to compliment many different applications. The matte white deep trim gimbal tilts up to 45° and accommodates an open reflector, pinhole reflector or a wall wash optic, so you can place the light exactly where desired. The flat trim gimbal also tilts up to 45° and comes in matte white or brushed metal finishes to accommodate many ceiling decors. The IP65 rated flat glass trims allow for highlighting architectural features in the most demanding wet locations. The depth and breadth of the trim options is sure to accommodate many lighting project needs.

Quick and Easy Installation

Installing the 2" MINIFIT modules is very simple. Attach the driver box to either the ceiling joist or optional MM2NCPLATE new construction plate. Connect the incoming power via the push in connectors and then attach the module with the quick connect plenum rated cord. Click the module into the desired trim and use the spring clips to snap the module into the ceiling for a clean, modern look.

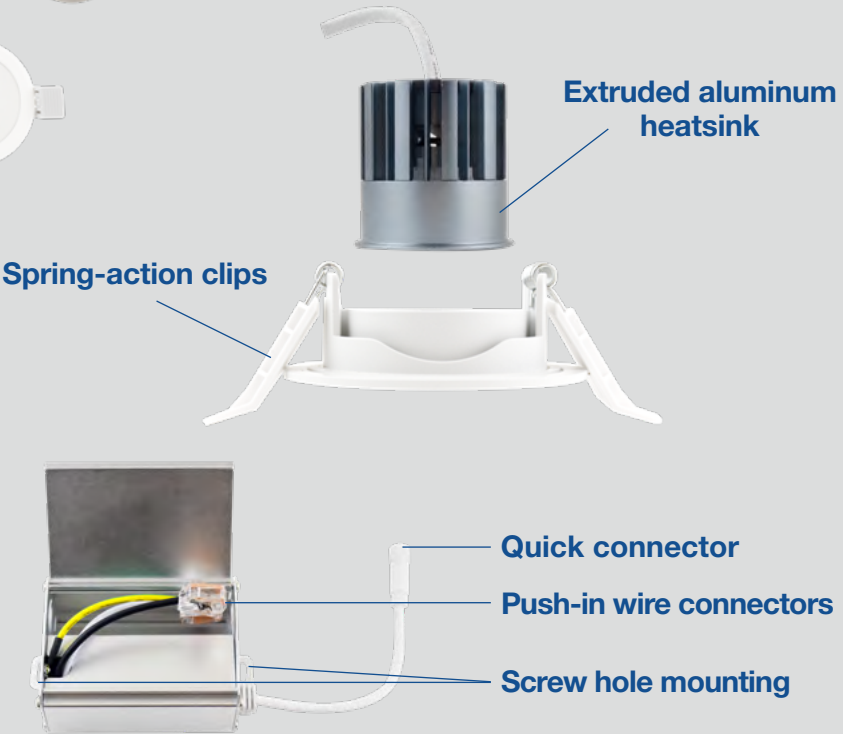


ACCESSORIES

Product	Model	Description
98589	MM2NCPLATE	MINIFIT 2" Module New Construction Plate for Stud / Joist mounting
35095	MM2CON6	MINIFIT 2" Module 6 foot extension cable
35096	MM2CON20	MINIFIT 2" Module 20 foot extension cable
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver



SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Wet	ES / JA8
98104	10NCDLR4DIM/927/EXT	2700K	720	90	70	120V	65W	110°	50,000	120V	Yes	✓ / ✓
98105	10NCDLR4DIM/930/EXT	3000K	720	90	72	120V	65W	110°	50,000	120V	Yes	✓ / ✓
98106	10NCDLR4DIM/940/EXT	4000K	740	90	74	120V	65W	110°	50,000	120V	Yes	✓ / ✓
98214	10NCDLR4DIM/930/277V/EXT	3000K	700	90	72	0-10V	65W	110°	50,000	120-277V	Yes	✓ / ✓
98215	10NCDLR4DIM/935/277V/EXT	3500K	720	90	72	0-10V	65W	110°	50,000	120-277V	Yes	✓ / ✓
98216	10NCDLR4DIM/940/277V/EXT	4000K	740	90	74	0-10V	65W	110°	50,000	120-277V	Yes	✓ / ✓
98107	12NCDLR6DIM/927/EXT	2700K	900	90	75	120V	85W	110°	50,000	120V	Yes	✓ / ✓
98108	12NCDLR6DIM/930/EXT	3000K	920	90	77	120V	85W	110°	50,000	120V	Yes	✓ / ✓
98109	12NCDLR6DIM/940/EXT	4000K	940	90	78	120V	85W	110°	50,000	120V	Yes	✓ / ✓
98217	12NCDLR6DIM/930/277V/EXT	3000K	920	90	77	0-10V	85W	110°	50,000	120-277V	Yes	✓ / ✓
98218	12NCDLR6DIM/935/277V/EXT	3500K	920	90	77	0-10V	85W	110°	50,000	120-277V	Yes	✓ / ✓
98219	12NCDLR6DIM/940/277V/EXT	4000K	940	90	78	0-10V	85W	110°	50,000	120-277V	Yes	✓ / ✓
98110	24.5NCDLR8DIM/927/EXT	2700K	1,820	90	74	120V	125W	110°	50,000	120V	Yes	✓ / ✓
98111	24.5NCDLR8DIM/930/EXT	3000K	1,920	90	78	120V	125W	110°	50,000	120V	Yes	✓ / ✓
98112	24.5NCDLR8DIM/940/EXT	4000K	1,920	90	78	120V	125W	110°	50,000	120V	Yes	✓ / ✓
98220	24.5NCDLR8DIM/930/277V/EXT	3000K	1,920	90	78	0-10V	125W	110°	50,000	120-277V	Yes	✓ / ✓
98221	24.5NCDLR8DIM/935/277V/EXT	3500K	1,920	90	78	0-10V	125W	110°	50,000	120-277V	Yes	✓ / ✓
98222	24.5NCDLR8DIM/940/277V/EXT	4000K	1,920	90	78	0-10V	125W	110°	50,000	120-277V	Yes	✓ / ✓

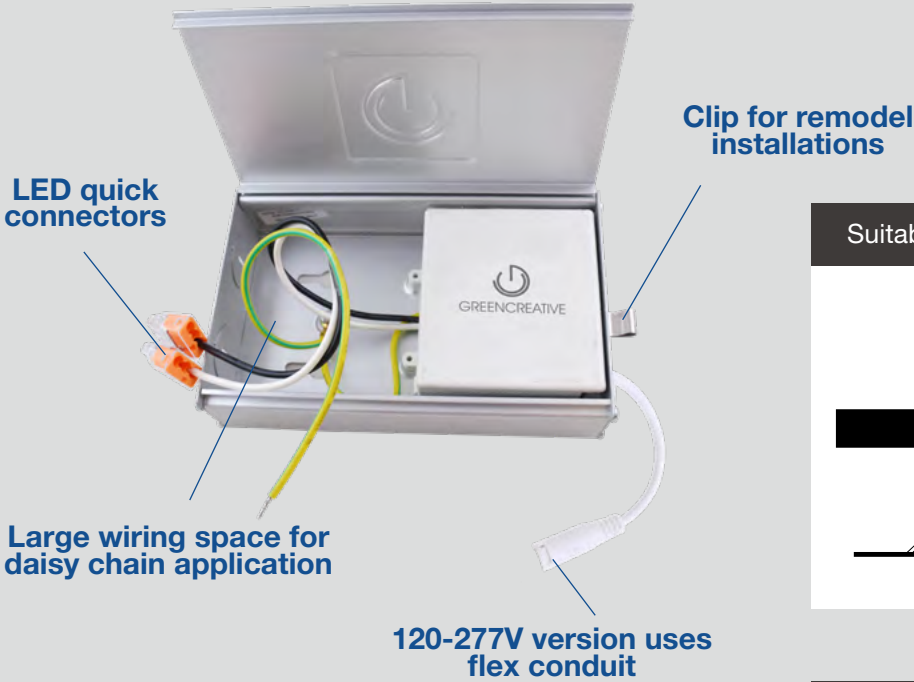


- For new construction or remodel installation
- Innovative design saves time & materials
- Easy to use spring-action clips
- 120V Forward phase (TRIAC) / Reverse phase (ELV) or 0-10V Dimmable

ACCESSORIES		
Product	Model	Description
97847	DLNC4GOOF/R	4" Goof Ring - Outer Diameter 6"
97848	DLNC6GOOF/R	6" Goof Ring - Outer Diameter 8-1/2"
98238	DLNC8GOOF	8" Goof Ring - Outer Diameter 10-1/4"
98501	NCPLATE/T4689	New Construction or Remodel Plate for T-Grid ceilings for use with 4" and 6" models
98502	NCPLATE468	New Construction Plate for Stud/Joist mounting for use with 4", 6" and 8" models
98583	NCPLATEJB	Additional J-Box for new construction plate installation
58012	35EMINVERTER	35W Emergency Inverter for use with 4", 6" and 8" models
58013	35EMINVERTER/CEC	California Title 20 Compliant 35W Emergency Inverter for use with 4", 6" and 8" models
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver for use with 4", 6" and 8" models


Suitable for Shallow Ceiling Applications

Wet Location, IC & Airtight Rated



Installs Directly into Ceiling - No Housing Needed

No J-Box or Recessed IC-Rated Can Required

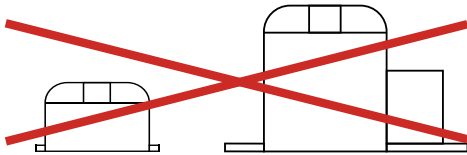




SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Wet	ES
58025	8.5DLNC4DIM/827	2700K	510	82	60	120V	50W	100°	40,000	120V	No	✓
58026	8.5DLNC4DIM/830	3000K	530	82	62	120V	50W	100°	40,000	120V	No	✓
58027	8.5DLNC4DIM/840	4000K	550	82	65	120V	50W	100°	40,000	120V	No	✓
58028	11.6DLNC6DIM/827	2700K	810	82	70	120V	75W	100°	40,000	120V	No	✓
58029	11.6DLNC6DIM/830	3000K	830	82	72	120V	75W	100°	40,000	120V	No	✓
58030	11.6DLNC6DIM/840	4000K	850	82	73	120V	75W	100°	40,000	120V	No	✓



- For new construction or remodel installation
- Innovative design saves time & materials
- Easy to use spring-action clips
- Goof Rings available


ACCESSORIES		
Product	Model	Description
97847	DLNC4GOOF/R	4" Goof Ring - Outer Diameter 6"
97848	DLNC6GOOF/R	6" Goof Ring - Outer Diameter 8-1/2"
98501	NCPLATE/T4689	New Construction or Remodel Plate for T-Grid ceilings for use with 4" and 6" models
98502	NCPLATE468	New Construction Plate for Stud/Joist mounting for use with 4" and 6" models
98583	NCPLATEJB	Additional J-Box for new construction plate installation
58012	35EMINVERTER	35W Emergency Inverter for use with 4" and 6" models
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver for use with 4" and 6" models

Edge Lighting Technology

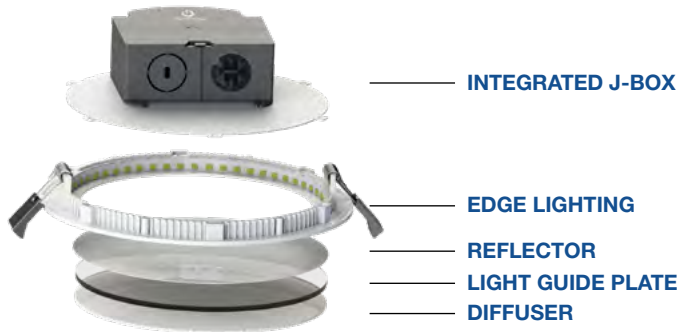


Installs Directly into Ceiling - No Housing Needed

No J-Box or Recessed IC-Rated Can Required

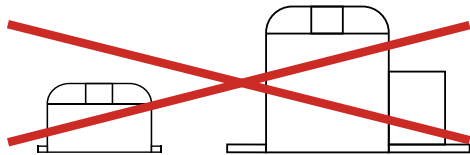

SURFACE MOUNT - 3N1 DOWNLIGHT

SURFACE MOUNT - 3N1 DOWNLIGHT

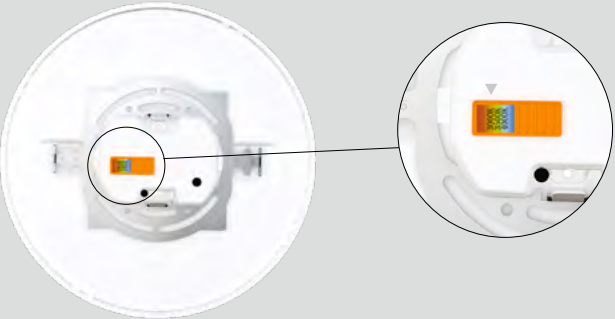


3 COLOR TEMPERATURES - 1 PRODUCT

Make your new construction, retrofit or remodel projects easier with the 3N1 downlight family of fixtures, featuring SelectKelvin Technology. Select the CCT before, during or after installation with just the flip of a switch and never worry about having the correct CCT for a project again.

4" J-BOX FLUSHMOUNT

4"/ 5-6" CAN RECESSED

SPRING J-BOX FLUSHMOUNT

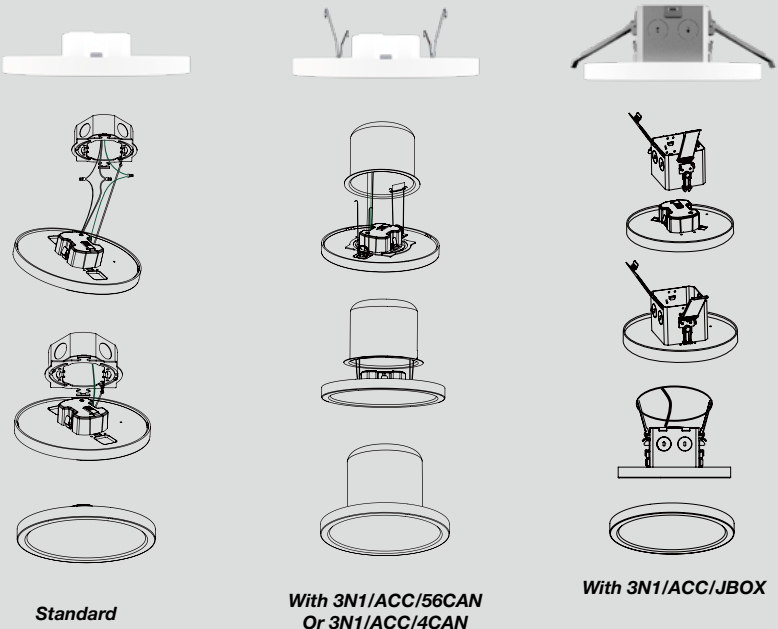

3 INSTALLATION METHODS - 1 PRODUCT

The 3N1 5", 7", 9" and 12" all come standard with a surface mount bracket compatible with most 4" J-Box (provided by others).

In addition, the 5" 3N1 retrofits 4" recessed housings and the 7" and 9" 3N1 retrofit 5" and 6" recessed housings, with optional can retrofit accessories (sold separately).

The 5", 7" and 9" 3N1 downlights, can also be used for remodel or new construction by direct mounting to the ceiling with the j-box accessory (sold separately).

SPECIFICATIONS

Series	Size	CRI	CCT	Dimming
3N1 3 IN 1 Downlight	5 5" 700 lumens	9 CRI 90	CCTS Selectable CCT 3000K / 3500K / 4000K	DIM010UNV 120-277V, 0-10V dimming
	7 7" 1,000 lumens			DIM120V 120V Line voltage dimming
	9 9" 1,200 lumens			
	12 12" 1,800 lumens			

ACCESSORIES

Product	Model	Description
35469	3N1/TRM/5/BL	5" 3N1 - Black Trim
35470	3N1/TRM/5/BZ	5" 3N1 - Bronze Trim
35471	3N1/TRM/5/BN	5" 3N1 - Brushed Nickel Trim
35472	3N1/TRM/7/BL	7" 3N1 - Black Trim
35473	3N1/TRM/7/BZ	7" 3N1 - Bronze Trim
35474	3N1/TRM/7/BN	7" 3N1 - Brushed Nickel Trim
35475	3N1/TRM/9/BL	9" 3N1 - Black Trim
35476	3N1/TRM/9/BZ	9" 3N1 - Bronze Trim
35477	3N1/TRM/9/BN	9" 3N1 - Brushed Nickel Trim
35478	3N1/ACC/4CAN	3N1 - 4" Can Retrofit Accessory (for use with 5" 3N1)
35479	3N1/ACC/56CAN	3N1 - 5/6" Can Retrofit Accessory (for use with 7" and 9" 3N1)
35480	3N1/ACC/JBOX	Direct Mount Accessory J-Box¹
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver (Field Installation)



Gasketed to provide Air-Tight and Wet Location Ratings



120V Forward and Reverse Phase or 120-277V 0-10V dimming options



Edge lighting technology featuring a PMMA light guide plate

<1" thickness from below the ceiling



90 CRI with 3-steps SDCM binning LEDs


Smooth polycarbonate lens for even light emitting surface with 110° beam angle.

SURFACE MOUNT - CLICK WITH PIR SENSOR



SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Wet	ES / JA8
98498	CLKSEN6/10MIN/927/120V	2700K	600	90	60	120V	50W	100°	50,000	120V	Yes	✓/✓
98499	CLKSEN6/10MIN/930/120V	3000K	600	90	60	120V	50W	100°	50,000	120V	Yes	✓/✓
98500	CLKSEN6/10MIN/940/120V	4000K	620	90	62	120V	50W	100°	50,000	120V	Yes	✓/✓

SURFACE MOUNT - CLICK WITH PIR SENSOR


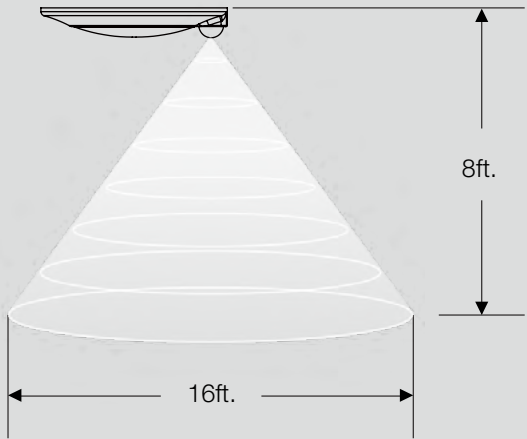



Integrated PIR Sensor

The CLICK features a fixture integrated PIR motion sensor. The PIR coverage area is a 16’ radius from a standard 8’ mounting height. The fixture will turn on during occupancy detection and remain on for 10 minutes after vacancy is detected. Ideal, for laundry rooms, utility rooms, garages, storage rooms, closets or hallways.


Quick and Easy Installation

The CLICK with PIR sensor installs in industry standard 4” J-Boxes. Connect the incoming power to the back of the fixture. Remove the fixture lens and screw the fixture to the J-Box with the provided hardware. Reattach the lens and you are good to go with your new sensor integrated, surface mount CLICK.

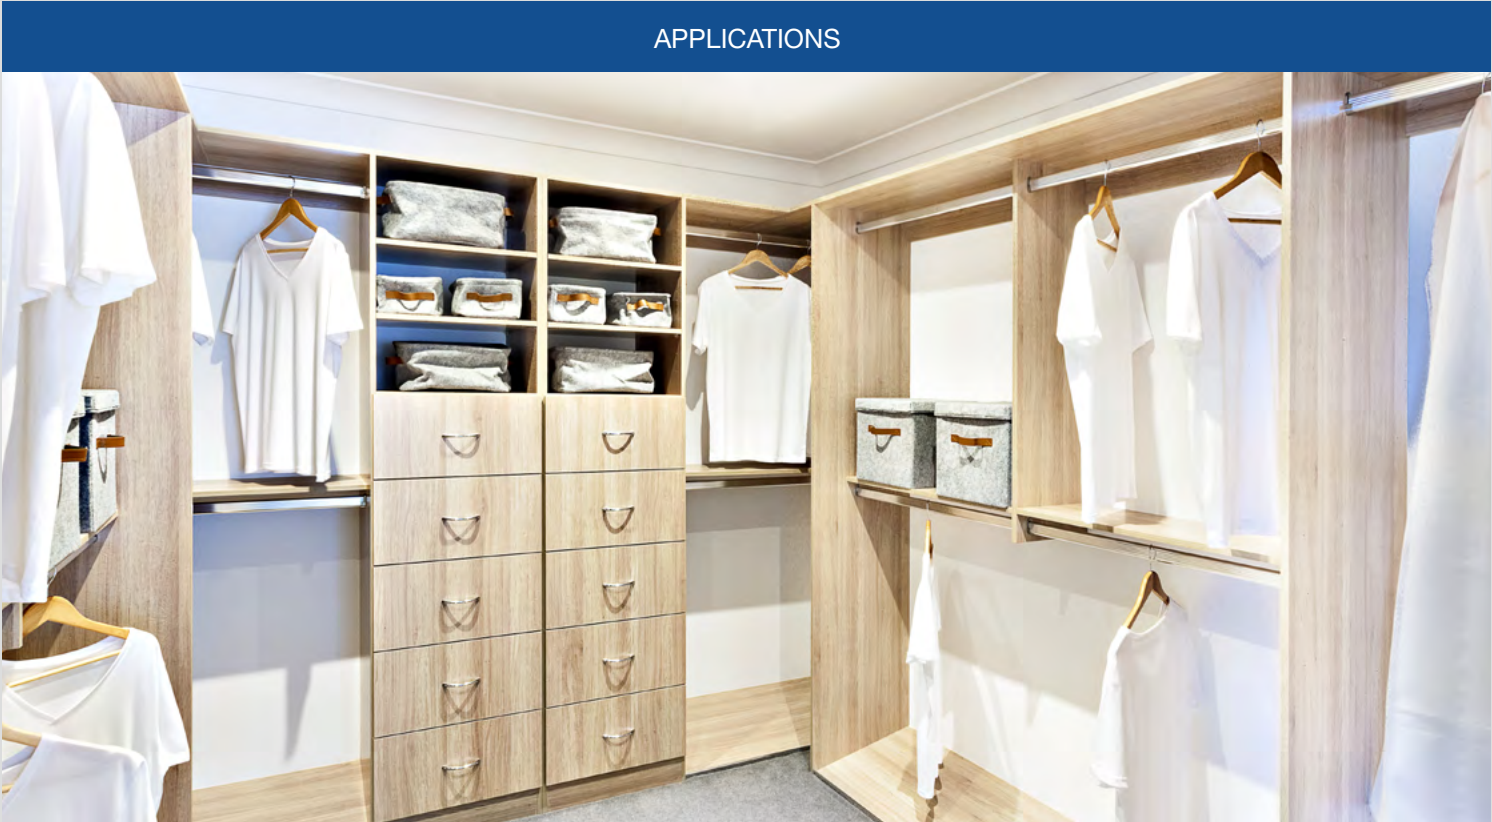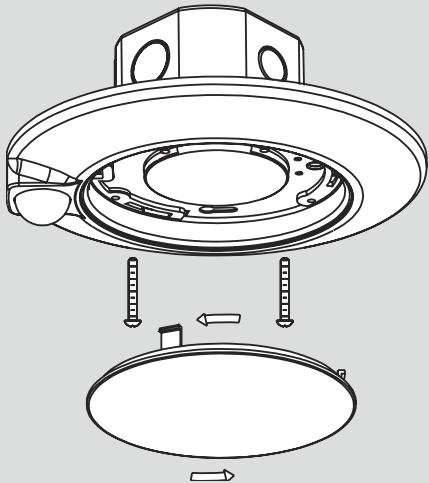


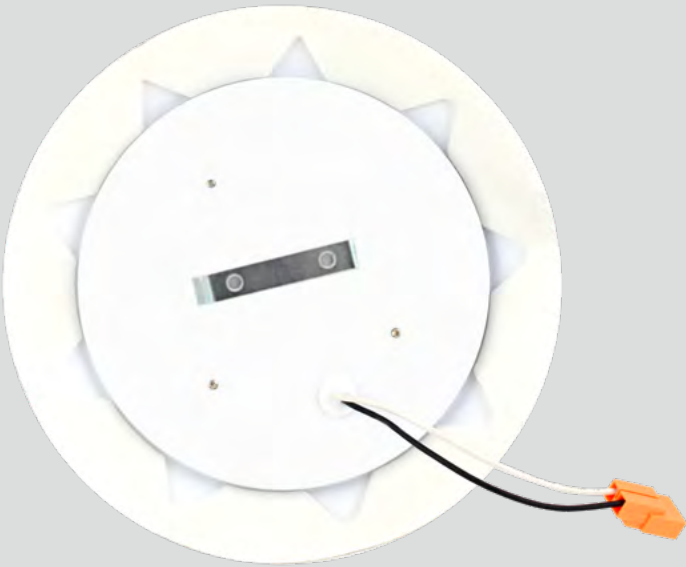

Seamless Installation

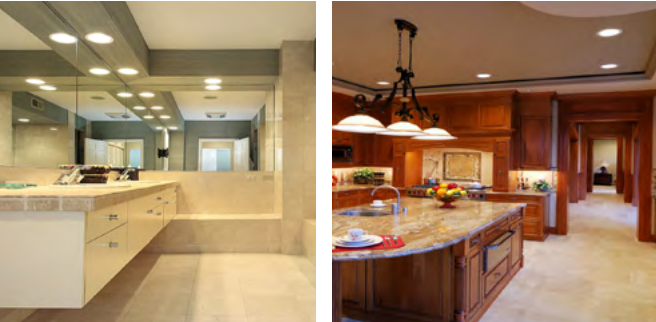

CLICK 6" 14.5W & 11W - High CRI

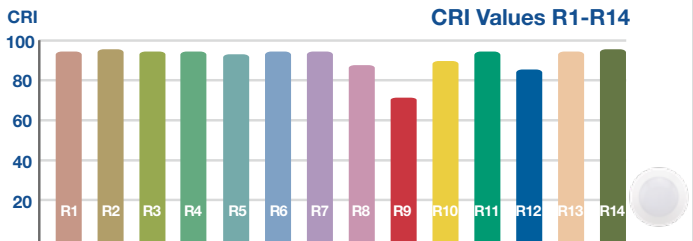


- Innovative CLICK design
- Compatible with 4" J-Boxes (standard)
- 4" & 5-6" recessed can accessories sold separately
- Installs in just minutes - No rewiring

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Wet	ES / JA8
34966	CLK6/927/DIM120V	2700K	792	90	72	120V	65W	110°	50,000	120V	Yes	✓/✓
34967	CLK6/930/DIM120V	3000K	825	90	75	120V	65W	110°	50,000	120V	Yes	✓/✓
34968	CLK6/940/DIM120V	4000K	902	90	82	120V	65W	110°	50,000	120V	Yes	✓/✓
34963	CLK6HO/927/DIM120V	2700K	1,080	90	72	120V	85W	110°	50,000	120V	Yes	✓/✓
34964	CLK6HO/930/DIM120V	3000K	1,125	90	75	120V	85W	110°	50,000	120V	Yes	✓/✓
34965	CLK6HO/940/DIM120V	4000K	1,230	90	82	120V	85W	110°	50,000	120V	Yes	✓/✓
57973	SMDL4/ACC	4" Recessed can accessories										
57974	SMDL6/ACC	5-6" Recessed can accessories										


INSTALLATION GUIDE

4" J-BOX




- Attach mounting bracket to J-Box
- Click downlight into mounting bracket

ACCESSORIES INCLUDED:




4" CAN




- Connect E26 adapter to the LED adapter
- Insert mounting clips and push downlight up until flush with ceiling

ACCESSORIES SOLD SEPARATELY:




5-6" CAN




- Connect E26 adapter to the LED adapter
- Squeeze mounting springs and push downlight up until flush with ceiling

ACCESSORIES SOLD SEPARATELY:




SURFACE MOUNT - CLICK ROUND

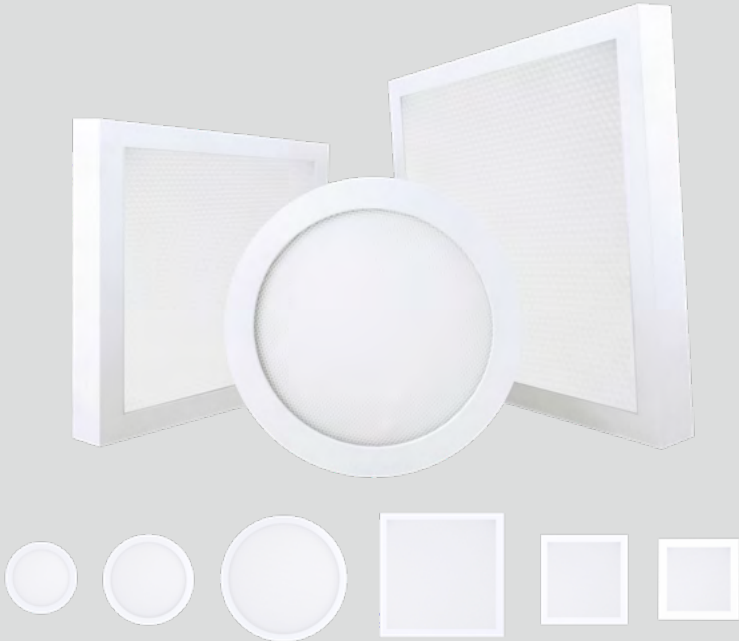

SPECIFICATIONS - ROUND												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Wet	ES / JA8
58260	10SMPR5.5DIM/927	2700K	550	90	55	120V	50W	100°	50,000	120V	Yes	✓ / N.A.
58261	10SMPR5.5DIM/930	3000K	550	90	55	120V	50W	100°	50,000	120V	Yes	✓ / N.A.
58262	10SMPR5.5DIM/940	4000K	560	90	56	120V	50W	100°	50,000	120V	Yes	✓ / N.A.
58257	15SMPR7DIM/927	2700K	850	90	57	120V	75W	100°	50,000	120V	Yes	✓ / N.A.
58258	15SMPR7DIM/930	3000K	850	90	57	120V	75W	100°	50,000	120V	Yes	✓ / N.A.
58259	15SMPR7DIM/940	4000K	870	90	58	120V	75W	100°	50,000	120V	Yes	✓ / N.A.
97978	15SMPR7DIM/927/R	2700K	850	90	57	120V	75W	100°	50,000	120V	Yes	✓ / ✓
97979	15SMPR7DIM/930/R	3000K	850	90	57	120V	75W	100°	50,000	120V	Yes	✓ / ✓
97980	15SMPR7DIM/940/R	4000K	870	90	58	120V	75W	100°	50,000	120V	Yes	✓ / ✓
58265	15SMPR7DIM/930/277V	3000K	870	90	57	0-10V	75W	100°	50,000	120-277V	Yes	✓ / N.A.
58266	15SMPR7DIM/940/277V	4000K	850	90	58	0-10V	75W	100°	50,000	120-277V	Yes	✓ / N.A.
58255	20SMPR9DIM/930	3000K	1,200	90	60	120V	100W	100°	50,000	120V	Yes	✓ / N.A.
58256	20SMPR9DIM/940	4000K	1,250	90	63	120V	100W	100°	50,000	120V	Yes	✓ / N.A.
58263	20SMPR9DIM/930/277V	3000K	1,200	90	60	0-10V	100W	100°	50,000	120-277V	Yes	✓ / N.A.
58264	20SMPR9DIM/940/277V	4000K	1,250	90	63	0-10V	100W	100°	50,000	120-277V	Yes	✓ / N.A.
58033	SMP/ACC	4" & 6" Recessed can accessories for 5.5" & 7" Round & Square (5.5" for use in 4" can only, 7" for use in 4" or 6" can)										
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver for use with 5.5", 7" and 9" models										

SURFACE MOUNT - CLICK SQUARE

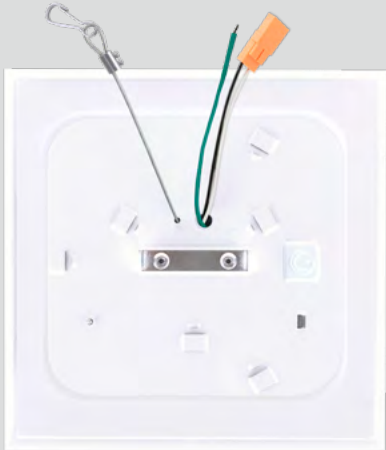

- Innovative CLICK design - Edge lighting technology
- Wet Location & high CRI
- Compatible with 4" J-Boxes (standard)
- 120V Forward phase (TRIAC) / Reverse phase (ELV) or 0-10V Dimmable

SootheOptic Low Glare Technology

Viewing Angle




0° 45° >65°
SootheOptic low glare technology reduces visual glare and creates a comfortable lighting environment


SPECIFICATIONS - SQUARE												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Wet	ES / JA8
58247	10SMPS5.5DIM/927	2700K	550	90	55	120V	50W	100°	50,000	120V	Yes	✓ / N.A.
58248	10SMPS5.5DIM/930	3000K	550	90	55	120V	50W	100°	50,000	120V	Yes	✓ / N.A.
58249	10SMPS5.5DIM/940	4000K	560	90	56	120V	50W	100°	50,000	120V	Yes	✓ / N.A.
58244	15SMPS7DIM/927	2700K	850	90	57	120V	75W	100°	50,000	120V	Yes	✓ / N.A.
58245	15SMPS7DIM/930	3000K	850	90	57	120V	75W	100°	50,000	120V	Yes	✓ / N.A.
58246	15SMPS7DIM/940	4000K	870	90	58	120V	75W	100°	50,000	120V	Yes	✓ / N.A.
97975	15SMPS7DIM/927/R	2700K	850	90	57	120V	75W	100°	50,000	120V	Yes	✓ / ✓
97976	15SMPS7DIM/930/R	3000K	850	90	57	120V	75W	100°	50,000	120V	Yes	✓ / ✓
97977	15SMPS7DIM/940/R	4000K	870	90	58	120V	75W	100°	50,000	120V	Yes	✓ / ✓
58252	15SMPS7DIM/930/277V	3000K	870	90	57	0-10V	75W	100°	50,000	120-277V	Yes	✓ / N.A.
58253	15SMPS7DIM/940/277V	4000K	850	90	58	0-10V	75W	100°	50,000	120-277V	Yes	✓ / N.A.
58242	20SMPS9DIM/930	3000K	1,200	90	60	120V	100W	100°	50,000	120V	Yes	✓ / N.A.
58243	20SMPS9DIM/940	4000K	1,250	90	63	120V	100W	100°	50,000	120V	Yes	✓ / N.A.
58250	20SMPS9DIM/930/277V	3000K	1,200	90	60	0-10V	100W	100°	50,000	120-277V	Yes	✓ / N.A.
58251	20SMPS9DIM/940/277V	4000K	1,250	90	63	0-10V	100W	100°	50,000	120-277V	Yes	✓ / N.A.
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver for use with 5.5", 7" and 9" models										



Easy Installation

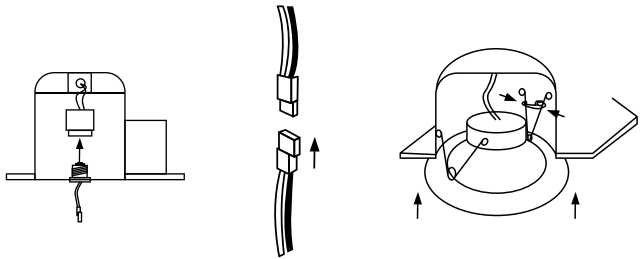

DOWNLIGHT 5-6" - High CRI


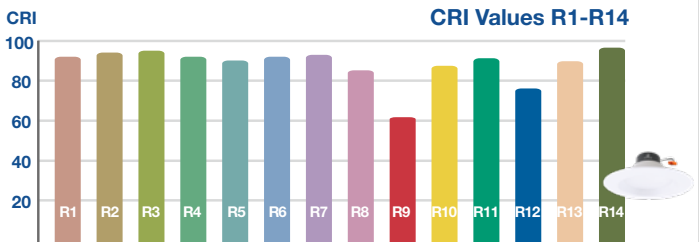


- Compatible with 4" and 5-6" housings
- Installs in just minutes - No rewiring
- High output, up to 1,260 lumens
- High CRI versions rated for Wet Locations

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	ES / JA8
97988	10DL4DIM/927	2700K	700	90	70	120V		100°	50,000	120V	✓/✓
97989	10DL4DIM/930	3000K	700	90	70	120V	65W	100°	50,000	120V	✓/✓
97990	10DL4DIM/940	4000K	700	90	70	120V		100°	50,000	120V	✓/✓
97991	12DL6DIM/927	2700K	840	90	70	120V		100°	50,000	120V	✓/✓
97992	12DL6DIM/930	3000K	840	90	70	120V	75W	100°	50,000	120V	✓/✓
97993	12DL6DIM/940	4000K	840	90	70	120V		100°	50,000	120V	✓/✓
97994	18DL6DIM/927	2700K	1,260	90	70	120V		100°	50,000	120V	✓/✓
97995	18DL6DIM/930	3000K	1,260	90	70	120V	100W	100°	50,000	120V	✓/✓
97996	18DL6DIM/940	4000K	1,260	90	70	120V		100°	50,000	120V	✓/✓
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver for use with 4" and 6" models									

APPLICATIONS



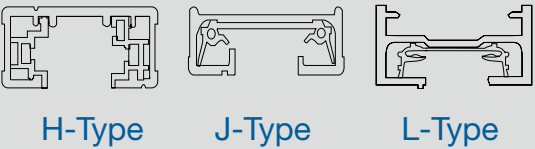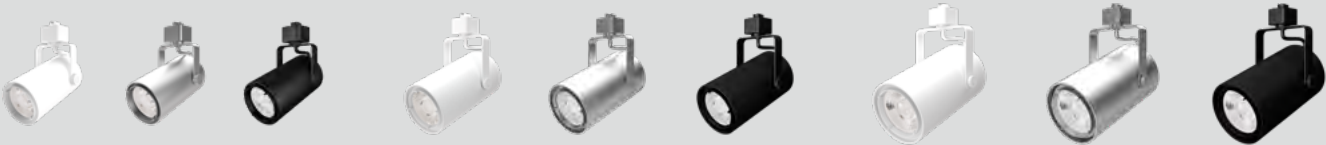

Canopy Mount

MULTIPLE SYSTEM

H, J, & L track head adapters are available to accommodate the most common track systems. Canopy mounts are ETL listed to be mounted to either ceiling or wall mounted j-boxes, offering design flexibility and consistency.



FIELD SELECTABLE LUMEN

ORBIT track features SelectDrive technology, for field selectable lumen output.




FIELD CHANGEABLE TIR OPTICS

Wide range of field interchangeable polycarbonate TIR optics, for clean and smooth beam control, Spot 15°, Narrow Flood 25° and Flood 35° available for each size.

FULL ACCESSORY SUITE

The ORBIT family is available with a variety of accessories in matching color finishes. The wall wash, snoot and barn doors snap on to the front of the fixture and can be used in conjunction with GREEN CREATIVE filters and lenses.

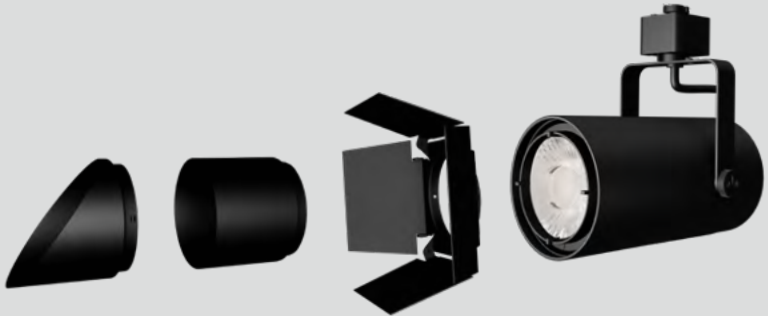

MEDIA, COLOR FILTERS, LENSES

Define, refine and dramatize your lighting design with media and lenses. Use the Honeycomb, Linear Spread and Solite lenses to reduce glare, spread and soften the edges of any lighting design.

SPECIFICATIONS							
Series	Output	CRI	CCT	Beam Angle	Driver	Adapter	Finish
ORB Orbit Series	S Small 700 / 1,000 lumens	9 90+ CRI	27 2700K	SP Spot 15°	DIM120V 120V, 50/60 Hz, Forward and Reverse Phase Line Voltage Dimming to 5%	H Halo	BL Black
	M Medium 1,500 / 2,000 lumens		30 3000K	NR Narrow 25°		J Juno	WH White
	L Large 3,000 / 4,000 lumens		35 3500K	FL Flood 35°		L Lightolier	W Silver
			40 4000K			CM Canopy Mount	

ACCESSORY ORDERING INFORMATION				
Model Series	Type	Size	Product	Color
ORB Orbit Series	ACC Accessories	S Small	SN Snoot	WH White
		M Medium	WW Wall Wash	BL Black
		L Large	BD Barn Door	
			HC¹ Honey Comb	

¹HC No need to select color for HC.

OPTIC ORDERING INFORMATION			
Model Series	Type	Size	Beam Angle
ORB Orbit Series	OPT Optical Lens	S Small	SP Spot 15°
		M Medium	NR Narrow 25°
		L Large	FL Flood 35°

MEDIA ORDERING INFORMATION			
Model Series	Type	Size	Product
ORB Orbit Series	LENS Lens	S Small	LS Linear Spread
		M Medium	SOL Solite
		L Large	



The Atom Track offers industry-leading performance in a versatile, compact fixture. With your choice of color temperature, lumen output, track adapter, beam angle, and fixture color, you can tailor this track light to any application. The Atom Track’s modular design makes it fully customizable, allowing you to easily make in-field upgrades to the light engine or lens. Snap-on accessories offer even more options, giving you flexibility and variety to your lighting project.

TRACK MOUNT

H, J and L track adapters accommodate most track systems

PATENT PENDING

90CRI, 2700K, 3000K, 3500K, 4000K CCT

650 & 1,050 lumens options

CANOPY MOUNT

25° Narrow & 35° Flood Beam Angles

Matte White & Matte Black finishes match existing track systems

NEW!

TRUE BEAM


Easy to install snap-on accessories, including wall wash, snoot, honeycomb louver, color shift and square distribution lenses.

- Compact form factor with industry-leading performance
- Meets CA Title 24 requirements
- H, J, L, and Canopy Mount adapters available
- Easy to install, snap-on accessories available

SPECIFICATIONS							
Series	Output	CRI	CCT	Beam Angle	Driver	Adapter	Finish
ATM Atom Track Series	6 650 lumens	9 90+ CRI	27 2700K	NR Narrow 25°	DIM120V 120V, 50/60 Hz, Forward and Reverse Phase Line Voltage Dimming to 10%	H Halo	B Matte Black
	10 1,050 lumens		30 3000K	FL Flood 35°		J Juno	W Matte White
			35 3500K			L Lightolier	
			40 4000K			CM Canopy Mount	

ACCESSORIES		
Product	Model	CBCP
35037	ATM/A/SN/WH	Snoot: Matte White
35038	ATM/A/SN/BL	Snoot: Matte Black
35040	ATM/A/HC/WH	Honeycomb Louver: Matte White Ring
35041	ATM/A/HC/BL	Honeycomb Louver: Matte Black Ring
35043	ATM/A/WW/WH	Wall Wash: Matte White
35044	ATM/A/WW/BL	Wall Wash: Matte Black
35811	MR/ACC/RED	Shift lens Red
35812	MR/ACC/GRE	Shift lens Green
35813	MR/ACC/BLE	Shift lens Blue
35814	MR/ACC/YLW	Shift lens Yellow
35818	MR/ACC/SQ2525	Square distribution lens 25°
35819	MR/ACC/SQ3636	Square distribution lens 36°

SINGLE CIRCUIT J-TYPE TRACK SYSTEM

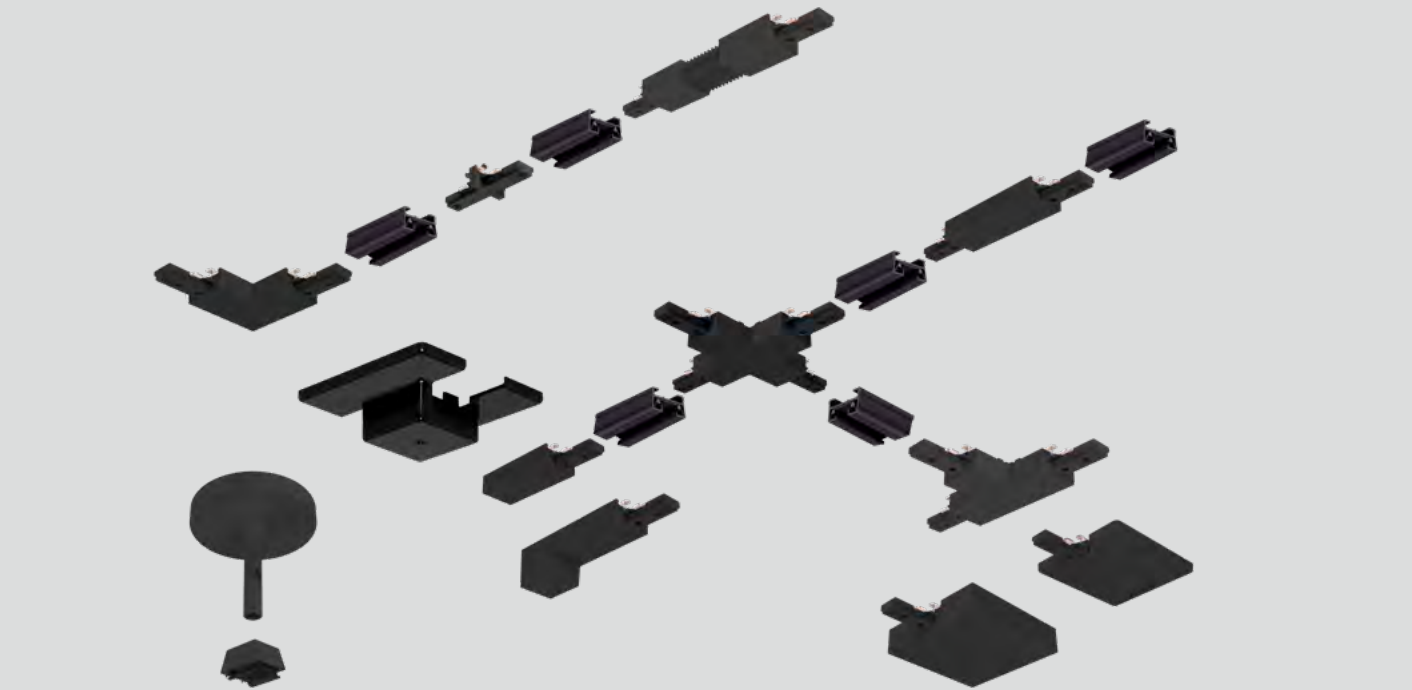

- Extruded aluminum, “ I-Beam” design construction for strength and rigidity
- Available standard in 24”, 48” and 96” lengths
- Field-cuttable for custom lengths
- Black, white and silver finishes available
- Rated for 20A at 120V, 60Hz. Maximum power rating is 2.4 kW
- Surface, cable or pendant installation options
- Mechanical polarity with a visual indicator simplifies installation
- All track system components are cULus listed for dry location
- Use with GREEN CREATIVE ATOM and ORBIT track fixtures
- Compatible with all J-Type track heads



GREEN CREATIVE Single Circuit J-Type Track System is compatible with all GREEN CREATIVE Track Fixtures with J-type adapter, including the ATOM and ORBIT track lines.

SINGLE CIRCUIT J-TYPE TRACK SYSTEM

SPECIFICATIONS			
Series	Length	Circuit	Finish
TRKJ Track J-type	24 24in. (2ft) Length	1C Single Circuit	BL Black
	48 48in. (4ft) Length		WH White
	96 96in. (8ft) Length		SV Silver

POWER FEEDS			
Series	Type	Circuit	Finish
TRKJ Track J-type	ENDF Live End Feed	1C Single Circuit	BL Black
	SCF Surface Conduit Feed		WH White
	ENDFCOV End Feed with Cover		SV Silver
	FCPY Floating Canopy Feed		
	TBENDF T-Bar End Feed		
	END End Cap		

CONNECTORS			
Series	Type	Circuit	Finish
TRKJ Track J-type	MIC Mini I Connector	1C Single Circuit	BL Black
	IC I Connector		WH White
	IFC I Flex Connector		SV Silver
	LC L Connector		
	TC T Connector		
	TCR T Connector Reverse Polarity		
	XC X Connector		

MOUNTING AND SUSPENSION			
Series	Type	Circuit	Finish
TRKJ Track J-type	STCPY Stem Canopy	1C Single Circuit	BL Black
	STEMSLOPECPY Stem Slope Ceiling Canopy		WH White
			SV Silver

Series	IPS	Type	Finish
STEM	1-4 1/4" IPS	*	BL Black
	1-4COUPLING* 1/4" IPS Stem Coupling Extender	12 12" long	WH White
		24 24" long	SV Silver
		36 36" long	
		48 48" long	

*No length for coupling extender

Series	Type	Finish
TRK Track	SWIRCOV Wire Way Cover	BL Black
	COVPLATE Square cover plate	WH White
		SV Silver


Series	Type
TRK Track	TBMOUNTCLIP Slide-on T-bar mounting clip



GREENCREATIVE

Your Partner for Professional Lighting Solutions

2022 H1



Tel / Fax: (866) 774-5433

info@greencreative.com

www.greencreative.com



/ GREENCREATIVELED



/ GClightingLED



/ GREEN-CREATIVE



An ILLUMUS Brand

www.ILLUMUS.com