



GREENCREATIVE

 LAMPS





CATALOG



Your partner for professional lighting solutions

GREEN CREATIVE, founded in 2010, is a solid-state lighting development and manufacturing company based in Sanford, FL with an office in Shanghai. The company offers a comprehensive line of high-performance LED Lamp, Downlight and Track lighting solutions, widely adopted by some of the largest companies in the world.

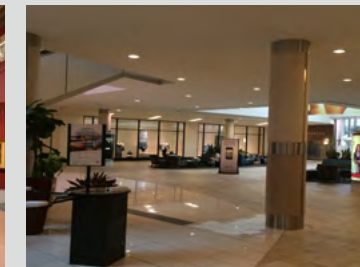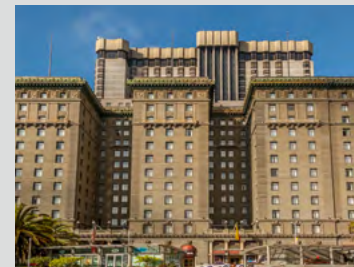

Bringing you the latest in LED technology

Anchored by strong integrated R&D capabilities and patented technology, Our innovation, performance and reliability have been recognized year after year by the Illuminating Engineering Society Progress Report, the LEDs Magazine Sapphire Awards, Edison Report, NAILD and more.

A complete line with national & international distribution

GREEN CREATIVE's full product line of ENERGY STAR®, DLC®, TITLE 20 & JA8 certified indoor retrofit and new construction lighting solutions serves the Retail, Hospitality, Food & Beverage, Office, Education & Industrial sectors through multiple distribution centers and sales networks across the USA.



TABLE OF CONTENTS

HALOGEN REPLACEMENTS

P1-15



PAR
P1-10



PAR56
P11-12



MR
P13-15

FLUORESCENT REPLACEMENTS

P16-49



TLED / EM DRIVER
P16-32



PLL / PL / PLS / PLO
P33-49

HID REPLACEMENTS

50-43



BOLLARD / POST TOP
P50-51



HIGHBAY / LOWBAY
P52

INCANDESCENT REPLACEMENTS

P53-60



BR
P53-54



A TYPE
P55-56



FILAMENT
P57-60

2023 FEATURED PRODUCTS




NEW!

P1-P6

REFINE PAR with swappable Lens

- Industry's largest assortment of 102 SKUs
- Patent-pending field interchangeable lenses design
- Powered by TRUE CHROMA for best color accuracy
- Proprietary REFINE optic design



NEW!

P29

CCT Select T8 EXT (UL Type C)

- Integrated CCT select switch
- Work with single wattage or power-selectable external LED drivers
- Superior flicker-free lighting with exceptional efficacy
- Dimmable at 0-10V with additional control possibilities



NEW!

P36, P39

CCT Select DiRect and HYBrid PL Lamps

- Integrated CCT switch for field selectable color temperatures
- Options for horizontal, vertical, and omni-directional light distributions
- DiRect models work with electronic ballast
- HYBrid models work with either magnetic ballast or off line voltage without any ballast



NEW!

P47

CCT Select PinFit PL Omni

- 36 SKUs in one solution
- Field selectable CCTs with omni-directional light distribution
- Patented modular socket design
- Suitable for electronic ballast, magnetic ballast or no-ballast environments



- One-stop solution with most extensive range of over 100 SKUs
- Patent pending field swappable lens system design
- Proprietary optical system provides balances distribution
- TRUE CHROMA technology ensures supreme color accuracy

SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim	Equiv.	Beam Angle	Life (hrs.)	Voltage	Encl.	TRUE CHROMA
37176	6.5PAR20DIM/927FL40/SL	2700K	520	95	80	1,100	Yes	50W	40°	60,000	120V	Yes	Yes
37177	6.5PAR20DIM/930FL40/SL	3000K	550	95	85	1,200	Yes	50W	40°	60,000	120V	Yes	Yes
37178	6.5PAR20DIM/930FL40/B/SL•	3000K	550	95	85	1,200	Yes	50W	40°	60,000	120V	Yes	Yes
37179	6.5PAR20DIM/935FL40/SL	3500K	550	95	85	1,200	Yes	50W	40°	60,000	120V	Yes	Yes
37180	6.5PAR20DIM/940FL40/SL	4000K	580	95	89	1,300	Yes	50W	40°	60,000	120V	Yes	No
37181	6.5PAR20DIM/950FL40/SL	5000K	580	95	89	1,300	Yes	50W	40°	60,000	120V	Yes	No
37182	6.5PAR20/927FL40/277V/SL	2700K	520	95	80	1,100	No	50W	40°	60,000	120-277V	Yes	Yes
37183	6.5PAR20/930FL40/277V/SL	3000K	550	95	85	1,200	No	50W	40°	60,000	120-277V	Yes	Yes
37184	6.5PAR20/940FL40/277V/SL	4000K	580	95	89	1,300	No	50W	40°	60,000	120-277V	Yes	No
37185	11PAR30DIM/927FL40/SL	2700K	950	95	86	1,700	Yes	75W	40°	60,000	120V	Yes	Yes
37186	11PAR30DIM/930FL40/SL	3000K	990	95	90	1,750	Yes	75W	40°	60,000	120V	Yes	Yes
37187	11PAR30DIM/930FL40/B/SL•	3000K	990	95	90	1,750	Yes	75W	40°	60,000	120V	Yes	Yes
37188	11PAR30DIM/935FL40/SL	3500K	990	95	90	1,750	Yes	75W	40°	60,000	120V	Yes	Yes
37189	11PAR30DIM/940FL40/SL	4000K	1,030	95	94	1,850	Yes	75W	40°	60,000	120V	Yes	No
37190	11PAR30DIM/950FL40/SL	5000K	1,030	95	94	1,850	Yes	75W	40°	60,000	120V	Yes	No
37191	11PAR30/927FL40/277V/SL	2700K	950	95	86	1,700	No	75W	40°	60,000	120-277V	Yes	Yes
37192	11PAR30/930FL40/277V/SL	3000K	990	95	90	1,750	No	75W	40°	60,000	120-277V	Yes	Yes
37193	11PAR30/940FL40/277V/SL	4000K	1,030	95	94	1,850	No	75W	40°	60,000	120-277V	Yes	No

• Black finish

SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim	Equiv.	Beam Angle	Life (hrs.)	Voltage	Encl.	TRUE CHROMA
37194	11PAR30SNDIM/927FL40/SL	2700K	950	95	86	1,700	Yes	75W	40°	60,000	120V	Yes	Yes
37195	11PAR30SNDIM/927FL40/B/SL•	2700K	950	95	86	1,700	Yes	75W	40°	60,000	120V	Yes	Yes
37196	11PAR30SNDIM/930NF25/SL	3000K	990	95	90	4,700	Yes	75W	25°	60,000	120V	Yes	Yes
37197	11PAR30SNDIM/930FL40/SL	3000K	990	95	90	1,750	Yes	75W	40°	60,000	120V	Yes	Yes
37198	11PAR30SNDIM/930FL40/B/SL•	3000K	990	95	90	1,750	Yes	75W	40°	60,000	120V	Yes	Yes
37199	11PAR30SNDIM/935FL40/SL	3500K	990	95	90	1,750	Yes	75W	40°	60,000	120V	Yes	Yes
37200	11PAR30SNDIM/940FL40/SL	4000K	1,030	95	94	1,850	Yes	75W	40°	60,000	120V	Yes	No
37201	11PAR30SNDIM/950FL40/SL	5000K	1,030	95	94	1,850	Yes	75W	40°	60,000	120V	Yes	No
37202	11PAR30SN/930FL40/277V/SL	3000K	990	95	90	1,750	No	75W	40°	60,000	120-277V	Yes	Yes
37203	15.5PAR38DIM/927FL40/SL	2700K	1,320	95	85	2,800	Yes	120W	40°	60,000	120V	Yes	Yes
37204	15.5PAR38DIM/930SP15/SL	3000K	1,370	95	88	14,700	Yes	120W	15°	60,000	120V	Yes	Yes
37205	15.5PAR38DIM/930NF25/SL	3000K	1,370	95	88	7,000	Yes	120W	25°	60,000	120V	Yes	Yes
37206	15.5PAR38DIM/930FL40/SL	3000K	1,370	95	88	2,900	Yes	120W	40°	60,000	120V	Yes	Yes
37207	15.5PAR38DIM/930FL40/B/SL•	3000K	1,370	95	88	2,900	Yes	120W	40°	60,000	120V	Yes	Yes
37208	15.5PAR38DIM/935FL40/SL	3500K	1,370	95	88	2,900	Yes	120W	40°	60,000	120V	Yes	Yes
37209	15.5PAR38DIM/940FL40/SL	4000K	1,420	95	92	3,000	Yes	120W	40°	60,000	120V	Yes	No
37210	15.5PAR38DIM/950FL40/SL	5000K	1,420	95	92	3,000	Yes	120W	40°	60,000	120V	Yes	No
37211	15.5PAR38/930FL40/277V/SL	3000K	1,370	95	88	2,900	No	120W	40°	60,000	120-277V	Yes	Yes
37212	15.5PAR38/940FL40/277V/SL	4000K	1,420	95	92	3,000	No	120W	40°	60,000	120-277V	Yes	No
37559	6.5PAR20DIM/927FL40/SL+SL15D	2700K	520	95	80	5,000	Yes	50W	15°	60,000	120V	Yes	Yes
37560	6.5PAR20DIM/927FL40/SL+SL25D	2700K	520	95	80	1,800	Yes	50W	25°	60,000	120V	Yes	Yes
37561	6.5PAR20DIM/930FL40/SL+SL15D	3000K	550	95	85	5,300	Yes	50W	15°	60,000	120V	Yes	Yes
37562	6.5PAR20DIM/930FL40/SL+SL25D	3000K	550	95	85	1,900	Yes	50W	25°	60,000	120V	Yes	Yes
37563	6.5PAR20DIM/930FL40/B/SL+SL15D•	3000K	550	95	85	5,300	Yes	50W	15°	60,000	120V	Yes	Yes
37564	6.5PAR20DIM/930FL40/B/SL+SL25D•	3000K	550	95	85	1,900	Yes	50W	25°	60,000	120V	Yes	Yes
37565	6.5PAR20DIM/935FL40/SL+SL15D	3500K	550	95	85	5,300	Yes	50W	15°	60,000	120V	Yes	Yes
37566	6.5PAR20DIM/935FL40/SL+SL25D	3500K	550	95	85	1,900	Yes	50W	25°	60,000	120V	Yes	Yes
37567	6.5PAR20DIM/940FL40/SL+SL15D	4000K	580	95	89	5,600	Yes	50W	15°	60,000	120V	Yes	No
37568	6.5PAR20DIM/940FL40/SL+SL25D	4000K	580	95	89	2,000	Yes	50W	25°	60,000	120V	Yes	No
37569	6.5PAR20DIM/950FL40/SL+SL15D	5000K	580	95	89	5,600	Yes	50W	15°	60,000	120V	Yes	No
37570	6.5PAR20DIM/950FL40/SL+SL25D	5000K	580	95	89	2,000	Yes	50W	25°	60,000	120V	Yes	No
37571	6.5PAR20/927FL40/277V/SL+SL15D	2700K	520	95	80	5,000	No	50W	15°	60,000	120-277V	Yes	Yes
37572	6.5PAR20/927FL40/277V/SL+SL25D	2700K	520	95	80	1,800	No	50W	25°	60,000	120-277V	Yes	Yes
37573	6.5PAR20/930FL40/277V/SL+SL15D	3000K	550	95	85	5,300	No	50W	15°	60,000	120-277V	Yes	Yes
37574	6.5PAR20/930FL40/277V/SL+SL25D	3000K	550	95	85	1,900	No	50W	25°	60,000	120-277V	Yes	Yes
37575	6.5PAR20/940FL40/277V/SL+SL15D	4000K	580	95	89	5,600	No	50W	15°	60,000	120-277V	Yes	No
37576	6.5PAR20/940FL40/277V/SL+SL25D	4000K	580	95	89	2,000	No	50W	25°	60,000	120-277V	Yes	No
37577	11PAR30DIM/927FL40/SL+SL15D	2700K	950	95	86	10,000	Yes	75W	15°	60,000	120V	Yes	Yes
37578	11PAR30DIM/927FL40/SL+SL25D	2700K	950	95	86	4,500	Yes	75W	25°	60,000	120V	Yes	Yes
37579	11PAR30DIM/930FL40/SL+SL15D	3000K	990	95	90	10,600	Yes	75W	15°	60,000	120V	Yes	Yes
37580	11PAR30DIM/930FL40/SL+SL25D	3000K	990	95	90	4,700	Yes	75W	25°	60,000	120V	Yes	Yes
37581	11PAR30DIM/930FL40/B/SL+SL15D•	3000K	990	95	90	10,600	Yes	75W	15°	60,000	120V	Yes	Yes

• Black finish

SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim	Equiv.	Beam Angle	Life (hrs.)	Voltage	Encl.	TRUE CHROMA
37582	11PAR30DIM/930FL40/B/SL+SL25D•	3000K	990	95	90	4,700	Yes	75W	25°	60,000	120V	Yes	Yes
37583	11PAR30DIM/935FL40/SL+SL15D	3500K	990	95	90	10,600	Yes	75W	15°	60,000	120V	Yes	Yes
37584	11PAR30DIM/935FL40/SL+SL25D	3500K	990	95	90	4,700	Yes	75W	25°	60,000	120V	Yes	Yes
37585	11PAR30DIM/940FL40/SL+SL15D	4000K	1,030	95	94	10,700	Yes	75W	15°	60,000	120V	Yes	No
37586	11PAR30DIM/940FL40/SL+SL25D	4000K	1,030	95	94	4,800	Yes	75W	25°	60,000	120V	Yes	No
37587	11PAR30DIM/950FL40/SL+SL15D	5000K	1,030	95	94	10,700	Yes	75W	15°	60,000	120V	Yes	No
37588	11PAR30DIM/950FL40/SL+SL25D	5000K	1,030	95	94	4,800	Yes	75W	25°	60,000	120V	Yes	No
37589	11PAR30/927FL40/277V/SL+SL15D	2700K	950	95	86	10,000	No	75W	15°	60,000	120-277V	Yes	Yes
37590	11PAR30/927FL40/277V/SL+SL25D	2700K	950	95	86	4,500	No	75W	25°	60,000	120-277V	Yes	Yes
37591	11PAR30/930FL40/277V/SL+SL15D	3000K	990	95	90	10,600	No	75W	15°	60,000	120-277V	Yes	Yes
37592	11PAR30/930FL40/277V/SL+SL25D	3000K	990	95	90	4,700	No	75W	25°	60,000	120-277V	Yes	Yes
37593	11PAR30/940FL40/277V/SL+SL15D	4000K	1,030	95	94	10,700	No	75W	15°	60,000	120-277V	Yes	No
37594	11PAR30/940FL40/277V/SL+SL25D	4000K	1,030	95	94	4,800	No	75W	25°	60,000	120-277V	Yes	No
37595	11PAR30SNDIM/927FL40/SL+SL15D	2700K	950	95	86	10,000	Yes	75W	15°	60,000	120V	Yes	Yes
37596	11PAR30SNDIM/927FL40/SL+SL25D	2700K	950	95	86	4,500	Yes	75W	25°	60,000	120V	Yes	Yes
37597	11PAR30SNDIM/927FL40/B/SL+SL15D•	2700K	950	95	86	10,000	Yes	75W	15°	60,000	120V	Yes	Yes
37598	11PAR30SNDIM/927FL40/B/SL+SL25D•	2700K	950	95	86	4,500	Yes	75W	25°	60,000	120V	Yes	Yes
37599	11PAR30SNDIM/930FL40/SL+SL15D	3000K	990	95	90	10,600	Yes	75W	15°	60,000	120V	Yes	Yes
37600	11PAR30SNDIM/930FL40/B/SL+SL15D•	3000K	990	95	90	10,600	Yes	75W	15°	60,000	120V	Yes	Yes
37601	11PAR30SNDIM/930FL40/B/SL+SL25D•	3000K	990	95	90	4,700	Yes	75W	25°	60,000	120V	Yes	Yes
37602	11PAR30SNDIM/935FL40/SL+SL15D	3500K	990	95	90	10,600	Yes	75W	15°	60,000	120V	Yes	Yes
37603	11PAR30SNDIM/935FL40/SL+SL25D	3500K	990	95	90	4,700	Yes	75W	25°	60,000	120V	Yes	Yes
37604	11PAR30SNDIM/940FL40/SL+SL15D	4000K	1,030	95	94	10,700	Yes	75W	15°	60,000	120V	Yes	No
37605	11PAR30SNDIM/940FL40/SL+SL25D	4000K	1,030	95	94	4,800	Yes	75W	25°	60,000	120V	Yes	No
37606	11PAR30SNDIM/950FL40/SL+SL15D	5000K	1,030	95	94	10,700	Yes	75W	15°	60,000	120V	Yes	No
37607	11PAR30SNDIM/950FL40/SL+SL25D	5000K	1,030	95	94	4,800	Yes	75W	25°	60,000	120V	Yes	No
37608	11PAR30SN/930FL40/277V/SL+SL15D	3000K	990	95	90	10,600	No	75W	15°	60,000	120-277V	Yes	Yes
37609	11PAR30SN/930FL40/277V/SL+SL25D	3000K	990	95	90	4,700	No	75W	25°	60,000	120-277V	Yes	Yes
37610	15.5PAR38DIM/927FL40/SL+SL15D	2700K	1,320	95	85	14,000	Yes	120W	15°	60,000	120V	Yes	Yes
37611	15.5PAR38DIM/927FL40/SL+SL25D	2700K	1,320	95	85	6,750	Yes	120W	25°	60,000	120V	Yes	Yes
37612	15.5PAR38DIM/930FL40/B/SL+SL15D•	3000K	1,370	95	88	14,700	Yes	120W	15°	60,000	120V	Yes	Yes
37613	15.5PAR38DIM/930FL40/B/SL+SL25D•	3000K	1,370	95	88	7,000	Yes	120W	25°	60,000	120V	Yes	Yes
37614	15.5PAR38DIM/935FL40/SL+SL15D	3500K	1,370	95	88	14,700	Yes	120W	15°	60,000	120V	Yes	Yes
37615	15.5PAR38DIM/935FL40/SL+SL25D	3500K	1,370	95	88	7,000	Yes	120W	25°	60,000	120V	Yes	Yes
37616	15.5PAR38DIM/940FL40/SL+SL15D	4000K	1,420	95	92	14,800	Yes	120W	15°	60,000	120V	Yes	No
37617	15.5PAR38DIM/940FL40/SL+SL25D	4000K	1,420	95	92	7,100	Yes	120W	25°	60,000	120V	Yes	No
37618	15.5PAR38DIM/950FL40/SL+SL15D	5000K	1,420	95	92	14,800	Yes	120W	15°	60,000	120V	Yes	No
37619	15.5PAR38DIM/950FL40/SL+SL25D	5000K	1,420	95	92	7,100	Yes	120W	25°	60,000	120V	Yes	No
37620	15.5PAR38/930FL40/277V/SL+SL15D	3000K	1,370	95	88	14,700	No	120W	15°	60,000	120-277V	Yes	Yes
37621	15.5PAR38/930FL40/277V/SL+SL25D	3000K	1,370	95	88	7,000	No	120W	25°	60,000	120-277V	Yes	Yes
37622	15.5PAR38/940FL40/277V/SL+SL15D	4000K	1,420	95	92	14,800	No	120W	15°	60,000	120-277V	Yes	No
37623	15.5PAR38/940FL40/277V/SL+SL25D	4000K	1,420	95	92	7,100	No	120W	25°	60,000	120-277V	Yes	No

• Black finish

Setting New Standards in Versatility and Performance

The updated REFINE PAR family provides one-stop solution with most extensive range of over 100 SKUs and specification grade lighting performance.



Proprietary REFINE Lenses



Focus TIR Lens

- Maximizes delivered center beam candle power
- Increases system efficiency

Fresnel Technology

- Features Fresnel design to refine beam pattern
- Provides even light throughout the distribution with a crisp edge

Faceted Texture

- Minimizes glare
- Maximizes visual comfort





Powered By TRUE CHROMA

REFINE PAR lamps are powered by GREEN CREATIVE's TRUE CHROMA technology, ensuring best in class color rendering, and color consistency, while exceeding the most stringent industry efficiency criteria such as California's Title 20 and Title 24 JA8.

Boasting a CRI ≥ 95, Rf ≥ 93, R9 ≥ 50, and SDCM ≤ 3, the REFINE PAR series brings out the true colors of objects and spaces, creating captivating environments that leave a lasting impression.



CRI ≥ 95 Rf ≥ 93 R9 ≥ 50 SDCM ≤ 3



Most Extensive PAR Range With Over 100 SKUs

Featured with the patent-pending field interchangeable lenses system design, our updated REFINE PAR family provides one-stop solution for quality PAR lamps with the most extensive range of 102 SKUs, setting new standards in versatility.

The series includes PAR20, PAR30, PAR30 Short Neck, and PAR38 sizes, available in white or black finishes, providing light output from gentle 520 lumens to powerful 1,420 lumens, for replacing 50W-120W halogen lamps. Choose from spot 15°, narrow 25° and flood 40° beam angles for various accent or highlight lighting effects. Use warm 2700K, 3000K and 3500K color temperatures to create relaxing and welcoming atmosphere, or neutral 4000K and cool 5000K color temperatures to create modern and energetic environment. 120V models are dimmable with most existing dimmers for better energy savings, and 120-277V models are also available for commercial lighting applications.

Patent Pending Swappable Lens System Design - Allows For Changing Beam Angles In The Field

- 

1. Turn the ring counterclockwise to unlock the ring above the lens
- 

2. Pull out the ring to release the lens
- 

3. Switch the lens and reposition the ring over the newly installed lens
- 

4. Turn the ring clockwise to lock the ring fixing the new lens



- Suitable to replace 50W, 75W, 120W halogen
- Dimmable with forward and reverse phase controls
- Compact size 1:1 halogen form factor
- Suitable for use in wet locations

SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	ES
34933	5.5PAR20DIM/830NF25/N	3000K	525	82	95	1,180	Yes	50W	25°	25,000	120V	No	✓
34935	5.5PAR20DIM/840NF25/N	4000K	525	82	95	1,180	Yes	50W	25°	25,000	120V	No	✓
34936	5.5PAR20DIM/840FL40/N	4000K	525	82	95	595	Yes	50W	40°	25,000	120V	No	✓
34939	10PAR30DIM/840NF25/N	4000K	950	82	95	2,910	Yes	75W	25°	25,000	120V	No	✓
34942	10PAR30SNDIM/830FL40/N	3000K	950	82	95	1,315	Yes	75W	40°	25,000	120V	No	✓
34943	10PAR30SNDIM/840NF25/N	4000K	950	82	95	2,910	Yes	75W	25°	25,000	120V	No	✓
34944	10PAR30SNDIM/840FL40/N	4000K	950	82	95	1,315	Yes	75W	40°	25,000	120V	No	✓



- Suitable to replace 50W, 75W, 120W halogen
- Dimmable with forward and reverse phase controls
- Exceptional color rendering CRI 90
- Suitable for use in wet locations and totally enclosed fixtures

SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	ES / T20
36212	6PAR16DIM/827FL35/RC	2700K	550	82	92	1,000	Yes	60W	35°	25,000	120V	Yes	✓ / N.A.
36213	6PAR16DIM/830FL35/RC	3000K	570	82	95	1,050	Yes	60W	35°	25,000	120V	Yes	✓ / N.A.
57991	6PAR16DIM/830FL35/R	3000K	500	82	83	1,050	Yes	60W	35°	25,000	120V	Yes	✓ / N.A.
37068	5.5PAR20DIM/927FL40	2700K	520	90	95	595	Yes	50W	40°	25,000	120V	Yes	✓ / ✓
37069	5.5PAR20DIM/930FL40	3000K	525	90	95	600	Yes	50W	40°	25,000	120V	Yes	✓ / ✓
37070	8PAR30DIM/930FL40	3000K	800	90	100	1,315	Yes	75W	40°	25,000	120V	Yes	✓ / ✓
37071	8PAR30DIM/940FL40	4000K	800	90	100	1,315	Yes	75W	40°	25,000	120V	Yes	✓ / ✓
37072	8PAR30SNDIM/930NF25	3000K	800	90	100	2,910	Yes	75W	25°	25,000	120V	Yes	✓ / ✓
37073	8PAR30SNDIM/930FL40	3000K	800	90	100	1,315	Yes	75W	40°	25,000	120V	Yes	✓ / ✓
37074	13PAR38DIM/930FL40	3000K	1,250	90	96	2,235	Yes	120W	40°	25,000	120V	Yes	✓ / ✓
37075	13PAR38DIM/940FL40	4000K	1,250	90	96	2,235	Yes	120W	40°	25,000	120V	Yes	✓ / ✓




- Very high output lamps are suitable to replace 75W/250W halogen and 39W/70W CMH
- Exceptional color rendering CRI 92
- Richer reds and natural skin tones
- Direct line voltage 120-277V - Dimmable options available also

SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	ES / JA8 / T20
98207	19.5PAR30HO/930FL40/277V/R	3000K	1,800	92	92	3,400	No	75W	40°	50,000	120-277V	No	✓ / N.A. / ✓
35429	19.5PAR30HO/935NF25/277V/R	3500K	1,800	92	92	8,160	No	75W	25°	50,000	120-277V	No	✓ / N.A. / ✓
35430	19.5PAR30HO/935FL40/277V/R	3500K	1,800	92	92	3,400	No	75W	40°	50,000	120-277V	No	✓ / N.A. / ✓
98208	19.5PAR30HO/940NF25/277V/R	4000K	1,800	92	92	8,160	No	75W	25°	50,000	120-277V	No	✓ / N.A. / ✓
98209	19.5PAR30HO/940FL40/277V/R	4000K	1,800	92	92	3,400	No	75W	40°	50,000	120-277V	No	✓ / N.A. / ✓
36537	19.5PAR38HODIM/930NF25/277V/R	3000K	2,000	93	103	8,200	Yes	250W	25°	50,000	120-277V	No	✓ / ✓ / ✓
36538	19.5PAR38HODIM/930FL40/277V/R	3000K	2,000	93	103	3,500	Yes	250W	40°	50,000	120-277V	No	✓ / ✓ / ✓
36539	19.5PAR38HODIM/935NF25/277V/R	3500K	2,000	93	103	8,200	Yes	250W	25°	50,000	120-277V	No	✓ / ✓ / ✓
36540	19.5PAR38HODIM/935FL40/277V/R	3500K	2,000	93	103	3,500	Yes	250W	40°	50,000	120-277V	No	✓ / ✓ / ✓
36541	19.5PAR38HODIM/940NF25/277V/R	4000K	2,000	93	103	8,200	Yes	250W	25°	50,000	120-277V	No	✓ / ✓ / ✓
36542	19.5PAR38HODIM/940FL40/277V/R	4000K	2,000	93	103	3,500	Yes	250W	40°	50,000	120-277V	No	✓ / ✓ / ✓
98223	25PAR38HO/927NF25/277V	2700K	2,400	92	96	10,000	No	250W	25°	50,000	120-277V	No	✓ / N.A. / ✓
98210	25PAR38HO/930NF25/277V	3000K	2,500	92	100	10,000	No	250W	25°	50,000	120-277V	No	✓ / N.A. / ✓
98211	25PAR38HO/930FL40/277V	3000K	2,500	92	100	4,800	No	250W	40°	50,000	120-277V	No	✓ / N.A. / ✓
35431	25PAR38HO/935NF25/277V	3500K	2,500	92	100	10,000	No	250W	25°	50,000	120-277V	No	✓ / N.A. / ✓
35432	25PAR38HO/935FL40/277V	3500K	2,500	92	100	4,800	No	250W	40°	50,000	120-277V	No	✓ / N.A. / ✓
98212	25PAR38HO/940NF25/277V	4000K	2,500	92	100	10,000	No	250W	25°	50,000	120-277V	No	✓ / N.A. / ✓
98213	25PAR38HO/940FL40/277V	4000K	2,500	92	100	4,800	No	250W	40°	50,000	120-277V	No	✓ / N.A. / ✓
35526	30PAR38HODIM/927NF25/277V	2700K	2,700	92	90	11,000	Yes	250W	25°	50,000	120-277V	No	✓ / ✓ / N.A.
35527	30PAR38HODIM/927FL40/277V	2700K	2,700	92	90	4,550	Yes	250W	40°	50,000	120-277V	No	✓ / ✓ / N.A.
35528	30PAR38HODIM/930NF25/277V	3000K	2,800	92	93	11,760	Yes	250W	25°	50,000	120-277V	No	✓ / ✓ / N.A.
35529	30PAR38HODIM/930FL40/277V	3000K	2,800	92	93	5,040	Yes	250W	40°	50,000	120-277V	No	✓ / ✓ / N.A.
35530	30PAR38HODIM/935NF25/277V	3500K	2,900	92	97	11,800	Yes	250W	25°	50,000	120-277V	No	✓ / ✓ / N.A.
35531	30PAR38HODIM/935FL40/277V	3500K	2,900	92	97	4,890	Yes	250W	40°	50,000	120-277V	No	✓ / ✓ / N.A.
35532	30PAR38HODIM/940NF25/277V	4000K	3,000	92	100	12,200	Yes	250W	25°	50,000	120-277V	No	✓ / ✓ / N.A.
35533	30PAR38HODIM/940FL40/277V	4000K	3,000	92	100	5,055	Yes	250W	40°	50,000	120-277V	No	✓ / ✓ / N.A.

- Suitable to replace 250W halogen lamps
- Integral driver suitable for 120-277V
- Industry leading SelectDrive PAR lamps with field-selectable 3-level light outputs
- Suitable for use in totally enclosed fixtures

3 Level power output



Power select switch allows power to be tailored to application requirements and can be adjusted from high to low.



SPECIFICATIONS														
Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	ES	
37022	24PAR38HO/827NF25/277V/SD	2700K	2,500	82	104	10,000	No	250W	25°	25,000	120-277V	Yes	✓	
37023	24PAR38HO/827FL40/277V/SD	2700K	2,500	82	104	4,500	No	250W	40°	25,000	120-277V	Yes	✓	
37024	24PAR38HO/830NF25/277V/SD	3000K	2,500	82	104	10,000	No	250W	25°	25,000	120-277V	Yes	✓	
37025	24PAR38HO/830FL40/277V/SD	3000K	2,500	82	104	4,500	No	250W	40°	25,000	120-277V	Yes	✓	
37026	24PAR38HO/835NF25/277V/SD	3500K	2,500	82	104	10,000	No	250W	25°	25,000	120-277V	Yes	✓	
37027	24PAR38HO/835FL40/277V/SD	3500K	2,500	82	104	4,500	No	250W	40°	25,000	120-277V	Yes	✓	
37028	24PAR38HO/840NF25/277V/SD	4000K	2,500	82	104	10,000	No	250W	25°	25,000	120-277V	Yes	✓	
37029	24PAR38HO/840FL40/277V/SD	4000K	2,500	82	104	4,500	No	250W	40°	25,000	120-277V	Yes	✓	



- Suitable to replace up to a 300W-500W halogen with GX16d base
- Flicker free light (<5% flicker)
- PAR64 adapter ring easily convert lamp to fit into PAR64 fixtures

Dimmable with most forward and reverse phase controls

Flicker Free lighting effect


Spot/Narrow Flood/Flood beam angles

Multi-optic lens for even light distribution

Up to 34,700cd candela output and 4100lm light output

Enclosed fixtures rated

GREEN CREATIVE PAR56 Provide Even Light Distribution

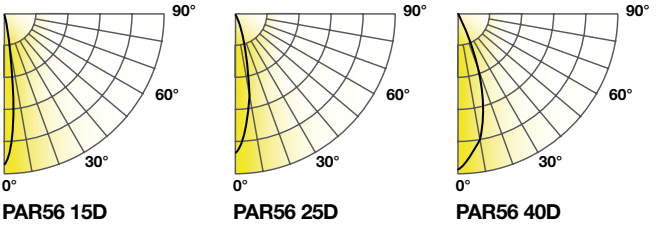



SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim*	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
35416	40PAR56DIM/927SP15	2700K	3,800	92	95	33,300	Yes	300W	15°	50,000	120V	Yes
35417	40PAR56DIM/927NF25	2700K	3,800	92	95	14,700	Yes	300W	25°	50,000	120V	Yes
35418	40PAR56DIM/927FL40	2700K	3,800	92	95	7,100	Yes	300W	40°	50,000	120V	Yes
35419	40PAR56DIM/930SP15	3000K	4,000	92	100	34,000	Yes	300W	15°	50,000	120V	Yes
35420	40PAR56DIM/930NF25	3000K	4,000	92	100	15,000	Yes	300W	25°	50,000	120V	Yes
35421	40PAR56DIM/930FL40	3000K	4,000	92	100	7,200	Yes	300W	40°	50,000	120V	Yes
36740	50PAR56DIM/930NF25	3000K	5,000	92	100	1,9000	Yes	500W	25°	50,000	120V	No
36741	50PAR56DIM/930FL40	3000K	5,000	92	100	9,000	Yes	500W	40°	50,000	120V	No
36742	PAR56/ACC/RG	PAR64 Adapter Ring										

* This lamp might not be compatible with all dimmers. Please visit www.greencreative.com for compatibility information.





TRUE CHROMA delivers exceptional color rendering of Rf ≥ 93 using TM-30 99 color samples vs. CRI 8 color samples

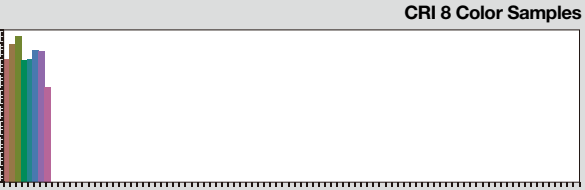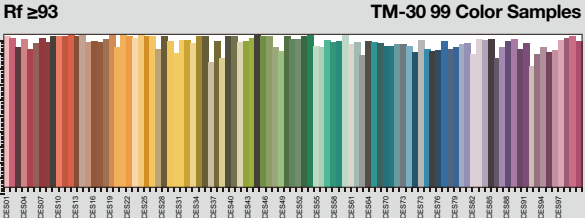

TRUE CHROMA guarantees best in class color consistency of SDCM ≤ 3, tighter than typical industry standards



SDCM ≤ 3

- Powered by TRUE CHROMA (CRI ≥ 95, Rf ≥ 93, R9 ≥ 50, SDCM ≤ 3)
- Proprietary REFINE lens enables powerful light output without glare
- Industry leading five year warranty
- Smooth dimming with most forward and reverse phase dimming controls
- Designed to work with TRUE BEAM accessories

SPECIFICATIONS														
Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	TRUE CHROMA	ES / JA8 / T20
36114	7.5MR16DIM/927SP10/RC	2700K	530	95	71	7,000	Yes	42W	10°	25,000	12V	Yes		✓/✓/✓
36117	7MR16DIM/927SP15/RC	2700K	490	95	70	5,145	Yes	50W	15°	25,000	12V	Yes		✓/✓/✓
36118	7MR16DIM/927NF25/RC	2700K	490	95	70	2,800	Yes	50W	25°	25,000	12V	Yes		✓/✓/✓
36119	7MR16DIM/927FL35/RC	2700K	490	95	70	1,425	Yes	50W	35°	25,000	12V	Yes		✓/✓/✓
36115	7.5MR16DIM/930SP10/RC	3000K	540	95	72	7,200	Yes	42W	10°	25,000	12V	Yes		✓/✓/✓
36120	7MR16DIM/930SP15/RC	3000K	500	95	71	5,250	Yes	50W	15°	25,000	12V	Yes		✓/✓/✓
36121	7MR16DIM/930NF25/RC	3000K	500	95	71	2,900	Yes	50W	25°	25,000	12V	Yes		✓/✓/✓
36122	7MR16DIM/930FL35/RC	3000K	500	95	71	1,450	Yes	50W	35°	25,000	12V	Yes		✓/✓/✓
36116	7.5MR16DIM/940SP10/RC	4000K	550	95	73	7,400	Yes	42W	10°	25,000	12V	Yes	NO	✓/✓/✓
36123	7MR16DIM/940FL35/RC	4000K	510	95	73	1,480	Yes	50W	35°	25,000	12V	Yes	NO	✓/✓/✓
36124	7.5MR16DIM/927SP15/RC	2700K	530	95	71	5,570	Yes	75W	15°	25,000	12V	Yes		✓/✓/✓
36125	7.5MR16DIM/927NF25/RC	2700K	530	95	71	3,000	Yes	75W	25°	25,000	12V	Yes		✓/✓/✓
36126	7.5MR16DIM/927FL35/RC	2700K	530	95	71	1,540	Yes	75W	35°	25,000	12V	Yes		✓/✓/✓
36127	7.5MR16DIM/930SP15/RC	3000K	540	95	72	5,670	Yes	75W	15°	25,000	12V	Yes		✓/✓/✓
36128	7.5MR16DIM/930NF25/RC	3000K	540	95	72	3,100	Yes	75W	25°	25,000	12V	Yes		✓/✓/✓
36129	7.5MR16DIM/930FL35/RC	3000K	540	95	72	1,560	Yes	75W	35°	25,000	12V	Yes		✓/✓/✓
36130	7.5MR16DIM/940FL35/RC	4000K	550	95	73	1,595	Yes	75W	35°	25,000	12V	Yes	NO	✓/✓/✓
37008	6.5GU10DIM/927SP10	2700K	460	95	71	6,160	Yes	75W	10°	25,000	120V	Yes		✓/✓/✓
35544	6.5GU10DIM/927NF25	2700K	460	95	71	2,300	Yes	75W	25°	25,000	120V	Yes		✓/✓/✓
35545	6.5GU10DIM/927FL35	2700K	460	95	71	1,330	Yes	75W	35°	25,000	120V	Yes		✓/✓/✓
37009	6.5GU10DIM/930SP10	3000K	470	95	72	6,290	Yes	75W	10°	25,000	120V	Yes		✓/✓/✓
35547	6.5GU10DIM/930NF25	3000K	470	95	72	2,350	Yes	75W	25°	25,000	120V	Yes		✓/✓/✓
37010	6.5GU10DIM/940SP10	4000K	480	95	74	6,425	Yes	75W	10°	25,000	120V	Yes	NO	✓/✓/✓
35549	6.5GU10DIM/940FL35	4000K	480	95	74	1,400	Yes	75W	35°	25,000	120V	Yes	NO	✓/✓/✓
35558	5GU10DIM/927NF25	2700K	380	95	76	1,900	Yes	50W	25°	25,000	120V	Yes		✓/✓/✓
35559	5GU10DIM/927FL35	2700K	380	95	76	1,105	Yes	50W	35°	25,000	120V	Yes		✓/✓/✓
35561	5GU10DIM/930NF25	3000K	390	95	78	1,950	Yes	50W	25°	25,000	120V	Yes		✓/✓/✓
35562	5GU10DIM/930FL35	3000K	390	95	78	1,135	Yes	50W	35°	25,000	120V	Yes		✓/✓/✓
35563	5GU10DIM/940FL35	4000K	400	95	80	1,160	Yes	50W	35°	25,000	120V	Yes	NO	✓/✓/✓

REFINE MR lamps are designed to work with GREEN CREATIVE's TRUE BEAM accessories which enable professionals to precisely realize any lighting design that can be imagined.



LINEAR DISTRIBUTION LENS

Provides an elliptical linear shaped light distribution.




Product	Model	Lumen Transmissivity	CBCP of 10° Lamp	Field Angle Horiz. x Vert.
35815	MR/ACC/LN1225	80%	35%	12° x 25°
35816	MR/ACC/LN1236	80%	23%	12° x 36°
35817	MR/ACC/LN1260	80%	16%	12° x 60°



WIDE DISTRIBUTION LENS

Maximizes wide distribution illumination for general lighting applications.



Product	Model	Lumen Transmissivity	CBCP of 10° Lamp	Field Angle
35820	MR/ACC/RD060	78%	6%	60°



SQUARE LENS

Provides a square shaped light distribution.



Product	Model	Lumen Transmissivity	CBCP of 10° Lamp	Field Angle
35818	MR/ACC/SQ2525	80%	19%	25°
35819	MR/ACC/SQ3636	80%	11%	36°



SHIFT LENS

Adjust the feel of any space by adding CCT and color shift lens options.



Product	Model	Lumen Transmissivity	CCT Shift Effect
35809	MR/ACC/OCT22	80%	2700K to 2200K
35810	MR/ACC/OCT24	85%	2700K to 2400K
35811	MR/ACC/RED	39%	Red
35812	MR/ACC/GRE	42%	Green
35813	MR/ACC/BLUE	26%	Blue
35814	MR/ACC/YLW	86%	Yellow



WALL WASH LENS

Bends the beam from 0° to 20° maximum deflection angle while maintaining uniform and consistent color and shape.



Product	Model	Lumen Transmissivity	CBCP of 10° Lamp	Max. Deflection
35821	MR/ACC/WW10D	80%	63%	10°
35822	MR/ACC/WW20D	80%	60%	20°



HONEYCOMB LOUVER

Reduces glare and softens beam patterns.



Product	Model	Cutoff Angle	CBCP of 10° Lamp
35808	MR/ACC/HG	40°	66%




MR16 VALUE SELECT LINE




- Suitable to replace 20W, 35W, 50W, 60W halogen MR16 lamps
- Compatible with most low-voltage electronic transformers
- Smooth dimming with most forward and reverse phase dimming controls
- Suitable for use in totally enclosed fixtures

SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	ES / JA8 / T20
36200	6.5MR16DIM/827NF25/35W	2700K	460	82	71	1,610	Yes	35W	25°	25,000	12V	Yes	✓ / N.A. / N.A.
36201	6.5MR16DIM/830NF25/35W	3000K	460	82	71	1,610	Yes	35W	25°	25,000	12V	Yes	✓ / N.A. / N.A.
36202	6.5MR16DIM/827FL35/35W	2700K	460	82	71	910	Yes	35W	35°	25,000	12V	Yes	✓ / N.A. / N.A.
36203	6.5MR16DIM/830FL35/35W	3000K	460	82	71	910	Yes	35W	35°	25,000	12V	Yes	✓ / N.A. / N.A.
36204	6.5MR16DIM/927NF25	2700K	500	92	77	2,350	Yes	50W	25°	25,000	12V	Yes	✓ / ✓ / ✓
36205	6.5MR16DIM/930NF25	3000K	520	92	80	2,400	Yes	50W	25°	25,000	12V	Yes	✓ / ✓ / ✓
36206	6.5MR16DIM/940NF25	4000K	540	92	83	2,450	Yes	50W	25°	25,000	12V	Yes	✓ / ✓ / ✓
36207	6.5MR16DIM/927FL35	2700K	500	92	77	1,350	Yes	50W	35°	25,000	12V	Yes	✓ / ✓ / ✓
36208	6.5MR16DIM/930FL35	3000K	520	92	80	1,400	Yes	50W	35°	25,000	12V	Yes	✓ / ✓ / ✓
36209	6.5MR16DIM/940FL35	4000K	540	92	83	1,450	Yes	50W	35°	25,000	12V	Yes	✓ / ✓ / ✓
36210	6GU10DIM/827FL40	2700K	550	82	92	700	Yes	50W	40°	25,000	120V	Yes	✓ / N.A. / N.A.
36211	6GU10DIM/830FL40	3000K	570	82	95	750	Yes	50W	40°	25,000	120V	Yes	✓ / N.A. / N.A.
37412	6GU10DIM/830NF25	3000K	570	82	95	1,200	Yes	50W	25°	25,000	120V	Yes	- / N.A. / N.A.
37413	6GU10DIM/840FL40	4000K	600	82	100	800	Yes	50W	40°	25,000	120V	Yes	- / N.A. / N.A.

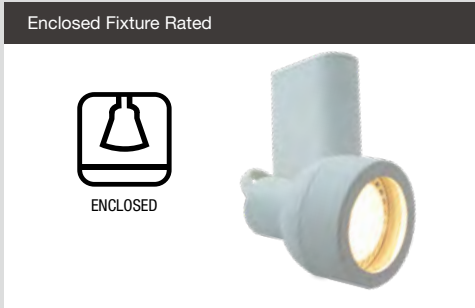

T8 DIR LINE

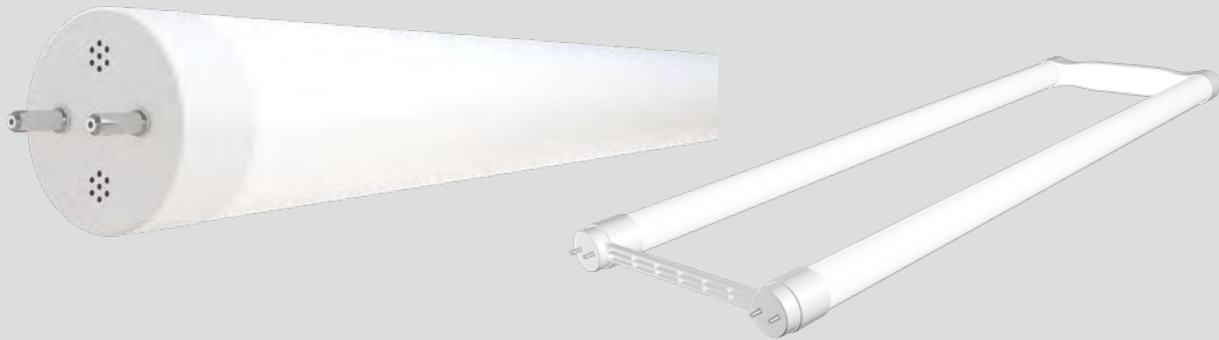

- Plug & Play installation
- Instant Start & Programmed Start ballast compatible
- Compatible with select 0-10V dimmable ballasts and controls
- NSF (National Sanitation Foundation) certified for Food Zone (Non-Contact), Splash, and Non-Food Zones

SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC / NSF	
36561	8T8/2F/830/DIR/RD	3000K	1,250	82	156	Yes	17W	220°	60,000	120-277V	Yes	✓ / ✓	
36562	8T8/2F/835/DIR/RD	3500K	1,250	82	156	Yes	17W	220°	60,000	120-277V	Yes	✓ / ✓	
36563	8T8/2F/840/DIR/RD	4000K	1,250	82	156	Yes	17W	220°	60,000	120-277V	Yes	✓ / ✓	
36564	8T8/2F/850/DIR/RD	5000K	1,250	82	156	Yes	17W	220°	60,000	120-277V	Yes	✓ / ✓	
36565	10T8/3F/830/DIR	3000K	1,450	82	145	Yes	25W	220°	60,000	120-277V	Yes	✓ / ✓	
36566	10T8/3F/835/DIR	3500K	1,450	82	145	Yes	25W	220°	60,000	120-277V	Yes	✓ / ✓	
36567	10T8/3F/840/DIR	4000K	1,450	82	145	Yes	25W	220°	60,000	120-277V	Yes	✓ / ✓	
36770	9.5T8/4F/830/HE/DIR	3000K	1,800	82	189	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36771	9.5T8/4F/835/HE/DIR	3500K	1,800	82	189	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36772	9.5T8/4F/840/HE/DIR	4000K	1,800	82	189	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36773	9.5T8/4F/850/HE/DIR	5000K	1,800	82	189	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36568	11T8/4F/830/DIR	3000K	1,800	82	164	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36569	11T8/4F/835/DIR	3500K	1,800	82	164	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36570	11T8/4F/840/DIR	4000K	1,800	82	164	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36571	11T8/4F/850/DIR	5000K	1,800	82	164	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36579	11T8/4F/830/DIR/C	3000K	1,800	82	164	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36580	11T8/4F/835/DIR/C	3500K	1,800	82	164	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36581	11T8/4F/840/DIR/C	4000K	1,800	82	164	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36582	11T8/4F/850/DIR/C	5000K	1,800	82	164	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36572	14T8/4F/835/DIR	3500K	2,200	82	157	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36573	14T8/4F/840/DIR	4000K	2,200	82	157	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36574	14T8/4F/850/DIR	5000K	2,200	82	157	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36575	15T8U6/830/DIR	3000K	2,100	82	140	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36576	15T8U6/835/DIR	3500K	2,100	82	140	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36577	15T8U6/840/DIR	4000K	2,200	82	147	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	
36578	15T8U6/850/DIR	5000K	2,200	82	147	Yes	32W	220°	60,000	120-277V	Yes	✓ / ✓	


T5 DIR LINE



- Plug & Play installation
- Instant Start & Programmed Start ballast compatible
- Plastic construction meets NSF requirements
- Compatible with select 0-10V dimmable ballasts and controls

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
57958	8T5HE/2F/830/DIR	3000K	950	82	119	Yes	14W	120°	60,000	120-277V	Yes	N.A.
57959	8T5HE/2F/835/DIR	3500K	950	82	119	Yes	14W	120°	60,000	120-277V	Yes	N.A.
57960	8T5HE/2F/840/DIR	4000K	1,100	82	138	Yes	14W	120°	60,000	120-277V	Yes	N.A.
35669	8T5HE/2F/850/DIR	5000K	1,100	82	138	Yes	14W	120°	60,000	120-277V	Yes	N.A.
57954	12T5HE/3F/830/DIR	3000K	1,420	82	118	Yes	21W	120°	60,000	120-277V	Yes	N.A.
57955	12T5HE/3F/835/DIR	3500K	1,420	82	118	Yes	21W	120°	60,000	120-277V	Yes	N.A.
57956	12T5HE/3F/840/DIR	4000K	1,550	82	125	Yes	21W	120°	60,000	120-277V	Yes	N.A.
97929	15T5HE/4F/830/DIR/R	3000K	2,200	82	147	Yes	28W	120°	60,000	120-277V	Yes	✓
97930	15T5HE/4F/835/DIR/R	3500K	2,200	82	147	Yes	28W	120°	60,000	120-277V	Yes	✓
97931	15T5HE/4F/840/DIR/R	4000K	2,250	82	150	Yes	28W	120°	60,000	120-277V	Yes	✓
98165	10.5T5HO/2F/830/DIR	3000K	1,500	82	143	Yes	24W	120°	60,000	120-277V	Yes	N.A.
98166	10.5T5HO/2F/835/DIR	3500K	1,500	82	143	Yes	24W	120°	60,000	120-277V	Yes	N.A.
98167	10.5T5HO/2F/840/DIR	4000K	1,600	82	152	Yes	24W	120°	60,000	120-277V	Yes	N.A.
35667	10.5T5HO/2F/850/DIR	5000K	1,600	82	152	Yes	24W	120°	60,000	120-277V	Yes	N.A.
98168	14.5T5HO/3F/830/DIR	3000K	2,050	82	142	Yes	39W	120°	60,000	120-277V	Yes	N.A.
98169	14.5T5HO/3F/835/DIR	3500K	2,050	82	142	Yes	39W	120°	60,000	120-277V	Yes	N.A.
98170	14.5T5HO/3F/840/DIR	4000K	2,200	82	152	Yes	39W	120°	60,000	120-277V	Yes	N.A.
97924	24T5HO/4F/830/DIR/R	3000K	3,450	82	144	Yes	54W	120°	60,000	120-277V	Yes	✓
97925	24T5HO/4F/835/DIR/R	3500K	3,450	82	144	Yes	54W	120°	60,000	120-277V	Yes	✓
97926	24T5HO/4F/840/DIR/R	4000K	3,500	82	146	Yes	54W	120°	60,000	120-277V	Yes	✓
97927	24T5HO/4F/850/DIR/R	5000K	3,500	82	146	Yes	54W	120°	60,000	120-277V	Yes	✓

T8 BYP LINE

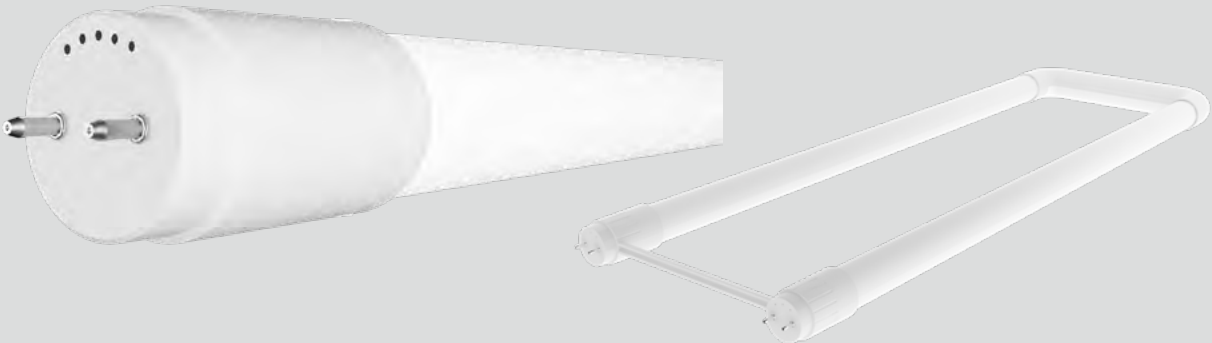

- Integral driver suitable for 120-277V
- Compatible with non-shunted lamp holders only
- Extra high efficacy (up to 167LPW) option available
- NSF (National Sanitation Foundation) certified for Food Zone (Non-Contact), Splash, and Non-Food Zones

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC / NSF	
36961	8T8/2F/830/BYP/RC	3000K	1,000	82	125	17W	160°	60,000	120-277V	Yes	✓ / ✓	
36962	8T8/2F/835/BYP/RC	3500K	1,000	82	125	17W	160°	60,000	120-277V	Yes	✓ / ✓	
36963	8T8/2F/840/BYP/RC	4000K	1,050	82	131	17W	160°	60,000	120-277V	Yes	✓ / ✓	
36964	8T8/2F/850/BYP/RC	5000K	1,050	82	131	17W	160°	60,000	120-277V	Yes	✓ / ✓	
98379	10.5T8/4F/830/BYP	3000K	1,650	82	157	32W	160°	60,000	120-277V	Yes	✓ / ✓	
98380	10.5T8/4F/835/BYP	3500K	1,650	82	157	32W	160°	60,000	120-277V	Yes	✓ / ✓	
98381	10.5T8/4F/840/BYP	4000K	1,750	82	167	32W	160°	60,000	120-277V	Yes	✓ / ✓	
98382	10.5T8/4F/850/BYP	5000K	1,750	82	167	32W	160°	60,000	120-277V	Yes	✓ / ✓	
36965	12T8/3F/830/BYP/RC	3000K	1,500	82	125	25W	160°	60,000	120-277V	Yes	✓ / ✓	
36966	12T8/3F/835/BYP/RC	3500K	1,500	82	125	25W	160°	60,000	120-277V	Yes	✓ / ✓	
36967	12T8/3F/840/BYP/RC	4000K	1,550	82	129	25W	160°	60,000	120-277V	Yes	✓ / ✓	
36968	12T8/3F/850/BYP/RC	5000K	1,550	82	129	25W	160°	60,000	120-277V	Yes	✓ / ✓	
36969	13T8/4F/830/BYP/RC	3000K	1,700	82	131	32W	160°	60,000	120-277V	Yes	✓ / ✓	
36970	13T8/4F/835/BYP/RC	3500K	1,700	82	131	32W	160°	60,000	120-277V	Yes	✓ / ✓	
36971	13T8/4F/840/BYP/RC	4000K	1,750	82	134	32W	160°	60,000	120-277V	Yes	✓ / ✓	
36972	13T8/4F/850/BYP/RC	5000K	1,750	82	134	32W	160°	60,000	120-277V	Yes	✓ / ✓	
98476	14.5T8/4F/835/BYP	3500K	2,100	82	145	32W	160°	60,000	120-277V	Yes	✓ / ✓	
98473	14.5T8/4F/840/BYP	4000K	2,200	82	152	32W	160°	60,000	120-277V	Yes	✓ / ✓	
98474	14.5T8/4F/850/BYP	5000K	2,200	82	152	32W	160°	60,000	120-277V	Yes	✓ / ✓	
36973	16T8/4F/840/BYP/RC	4000K	2,100	82	131	32W	160°	60,000	120-277V	Yes	✓ / ✓	
36974	16T8/4F/850/BYP/RC	5000K	2,100	82	131	32W	160°	60,000	120-277V	Yes	✓ / ✓	
98162	17T8U6/830/BYP/R	3000K	2,100	82	124	32W	160°	60,000	120-277V	Yes	✓ / N.A.	
35460	17T8U6/835/BYP/R	3500K	2,100	82	124	32W	160°	60,000	120-277V	Yes	✓ / N.A.	
98163	17T8U6/840/BYP/R	4000K	2,300	82	135	32W	160°	60,000	120-277V	Yes	✓ / N.A.	
98164	17T8U6/850/BYP/R	5000K	2,300	82	135	32W	160°	60,000	120-277V	Yes	✓ / N.A.	
36975	20.5T8/4F/840/BYP/R	4000K	2,950	82	144	40W*	160°	60,000	120-277V	Yes	✓ / ✓	
36976	20.5T8/4F/850/BYP/R	5000K	2,950	82	144	40W*	160°	60,000	120-277V	Yes	✓ / ✓	

* Replace 40W T10/T12 lamps or 32W T8 lamps.

T8 BYP LINE



- Integral driver suitable for 120V
- High efficacy up to 138 LPW
- Compatible with most forward and reverse phase dimmers

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
98372	13T8/4F/DIM/830/BYP	3000K	1,700	82	128	Yes	32W	160°	50,000	120V	Yes	✓
98373	13T8/4F/DIM/835/BYP	3500K	1,700	82	128	Yes	32W	160°	50,000	120V	Yes	✓
98374	13T8/4F/DIM/840/BYP	4000K	1,800	82	138	Yes	32W	160°	50,000	120V	Yes	✓
98375	13T8/4F/DIM/850/BYP	5000K	1,800	82	138	Yes	32W	160°	50,000	120V	Yes	✓

T5 BYP LINE



- Integral driver suitable for 120-277V
- Wide beam design 270° light emitting area
- Suitable for use in totally enclosed fixtures
- NSF (National Sanitation Foundation) certified for Food Zone (Non-Contact), Splash, and Non-Food Zones

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC / NSF	
36946	9.5T5HE/2F/835/BYP/R	3500K	1,150	82	121	14W	160°	60,000	120-277V	Yes	N.A. / ✓	
36947	9.5T5HE/2F/840/BYP/R	4000K	1,200	82	126	14W	160°	60,000	120-277V	Yes	N.A. / ✓	
37112	12T5HE/3F/830/BYP/R	3000K	1,350	82	113	21W	160°	60,000	120-277V	Yes	N.A. / ✓	
36950	12T5HE/3F/835/BYP/R	3500K	1,450	82	121	21W	160°	60,000	120-277V	Yes	N.A. / ✓	
36951	12T5HE/3F/840/BYP/R	4000K	1,500	82	125	21W	160°	60,000	120-277V	Yes	N.A. / ✓	
36954	14.5T5HE/4F/830/BYP/R	3000K	1,800	82	124	28W	160°	60,000	120-277V	Yes	✓ / ✓	
36955	14.5T5HE/4F/835/BYP/R	3500K	1,800	82	124	28W	160°	60,000	120-277V	Yes	✓ / ✓	
36956	14.5T5HE/4F/840/BYP/R	4000K	2,000	82	138	28W	160°	60,000	120-277V	Yes	✓ / ✓	
36990	14.5T5HE/4F/850/BYP/R	5000K	2,000	82	138	28W	160°	60,000	120-277V	Yes	✓ / ✓	
37110	11.5T5HO/2F/830/BYP/R	3000K	1,350	82	117	24W	160°	60,000	120-277V	Yes	N.A. / ✓	
36948	11.5T5HO/2F/835/BYP/R	3500K	1,400	82	122	24W	160°	60,000	120-277V	Yes	N.A. / ✓	
36949	11.5T5HO/2F/840/BYP/R	4000K	1,500	82	130	24W	160°	60,000	120-277V	Yes	N.A. / ✓	
36952	14.5T5HO/3F/835/BYP/R	3500K	1,850	82	128	39W	160°	60,000	120-277V	Yes	N.A. / ✓	
36953	14.5T5HO/3F/840/BYP/R	4000K	1,900	82	131	39W	160°	60,000	120-277V	Yes	N.A. / ✓	




Balanced Light Output



GREEN CREATIVE T5 BYPass



Other brand T5 BYPass

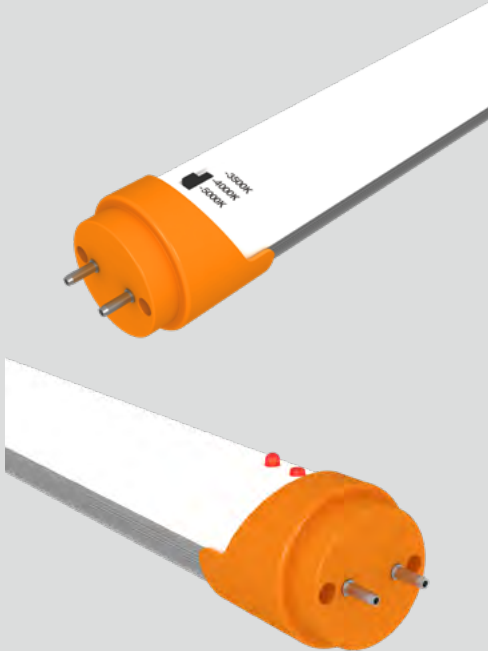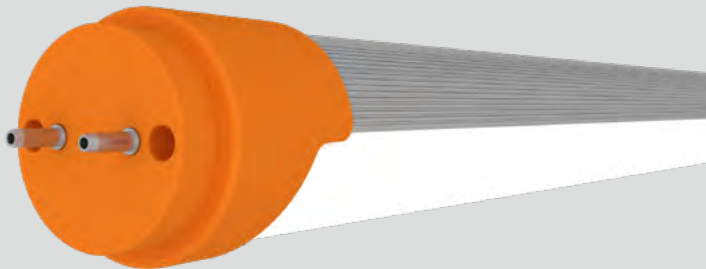


R17d



Fa8

- Industry's first CCT selectable emergency T8
- Field selectable three color temperatures
- Built-in recyclable Lithium battery for emergency lighting
- Constant power output in emergency mode for a minimum of 90 minutes
- Continuous self-test design

SelectKelvin Technology - Easy To Stock



CCT Select Switch

Select Kelvin



5000K




4000K



3500K

Continuous Self-Test Design – Safety Ensured

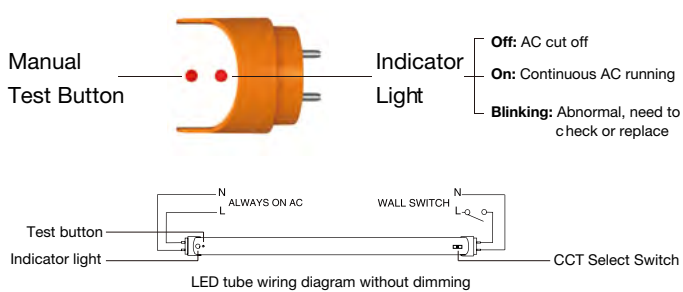

SPECIFICATIONS											
Product	Model	Mode	CCT	Lumens	Efficacy (LPW)	Equiv.	Wattage	Nominal Length	CRI	Life (hrs)	Beam Angle
37410	15T8/4F/8CCTS/EM	Standard	3500K	1900	127						
			4000K	2000	133	32W	15				
			5000K	2000	133						
		Emergency	3500K					4'	82	50,000	140°
			4000K	600	133	N.A.	4.5				
			5000K								

- Integral driver suitable for 120-277V
- Replaces 8ft F96T8/F96T12 fluorescent lamps
- Available in single pin & recessed double contact pin
- Double ended installation, no need to change existing sockets
- NSF (National Sanitation Foundation) certified for Food Zone (Non-Contact), Splash, and Non-Food Zones

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC / NSF
34869	43T8/8F/840/DEB/Fa8	4000K	5,500	82	128	F96T8 F96T12	160°	50,000	120-277V	Yes	N.A. / √
34870	43T8/8F/850/DEB/Fa8	5000K	5,500	82	128	F96T8 F96T12	160°	50,000	120-277V	Yes	N.A. / √
34871	43T8/8F/840/DEB/R17d	4000K	5,500	82	128	F96T8 F96T12	160°	50,000	120-277V	Yes	N.A. / √
36769	40T8/8F/850/DEB/R17d	5000K	5,500	82	137.5	F96T8 F96T12	160°	50,000	120-277V	Yes	N.A. / √
36766	40T8/8F/840/DEB/Fa8	4000K	5,500	82	137.5	F96T8 F96T12	160°	50,000	120-277V	Yes	√ / √
36767	40T8/8F/850/DEB/Fa8	5000K	5,500	82	137.5	F96T8 F96T12	160°	50,000	120-277V	Yes	√ / √

CCT SELECT T8 UEB LINE

T8 UEB LINE



120-277V

UNIVERSAL


Select Kelvin



120-277V

UNIVERSAL

NSF

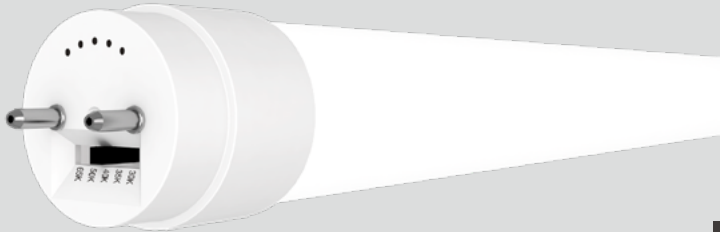



FOCUS FEATURE

CCT Select Switch
3000K
3500K
4000K
5000K
6500K

Select Kelvin

- Replaces 2', 3' & 4' T8 fluorescent lamp
- Operates directly on 120-277V line voltage
- UEB – Single or double ended installation in bypass mode
- Ultra-high efficacy up to 170LPW
- Field selectable five color temperatures

SPECIFICATIONS										
Product	Model	CCT	Lumens	LPW	CRI	Equiv.	Beam Angle	Life (hrs)	Wattage	Nominal Length
37227	7T8/2F/8CCTS/UEB	3000K	950	136	82	32W	160°	60,000	7	2'
		3500K	1,030	147						
		4000K	1,030	147						
		5000K	1,030	147						
		6500K	1,000	143						
37228	11T8/3F/8CCTS/UEB	3000K	1425	130	82	32W	160°	60,000	11	3'
		3500K	1,545	140						
		4000K	1,545	140						
		5000K	1,545	140						
		6500K	1,500	136						
37229	10T8/4F/8CCTS/UEB	3000K	1,570	157	82	32W	160°	60,000	10	4'
		3500K	1,700	170						
		4000K	1,700	170						
		5000K	1,700	170						
		6500K	1,650	165						
37231	15T8/4F/8CCTS/UEB	3000K	2,090	139	82	32W	160°	60,000	15	4'
		3500K	2,260	151						
		4000K	2,260	151						
		5000K	2,260	151						
		6500K	2,200	147						

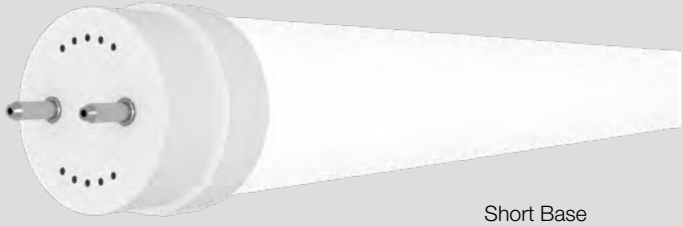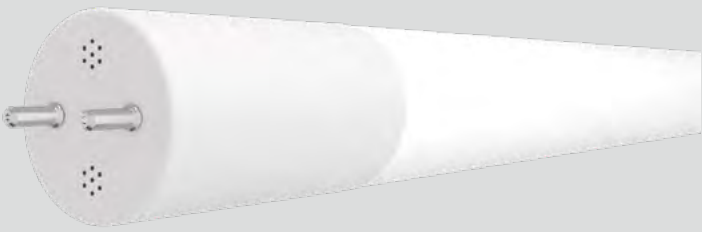

- Single ended & Double ended installation (UEB)
- Replaces 2', 3' and 4' T8 fluorescent lamps
- Integral driver suitable for 120-277V
- Ultra-high efficacy up to 170LPW
- Film coated version available

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC / NSF
37394	8.5T8/2F/830/UEB	3000K	1,050	82	124	17W	220°	60,000	120-277V	Yes	√ / √
37395	8.5T8/2F/835/UEB	3500K	1,050	82	124	17W	220°	60,000	120-277V	Yes	√ / √
37396	8.5T8/2F/840/UEB	4000K	1,100	82	129	17W	220°	60,000	120-277V	Yes	√ / √
37397	8.5T8/2F/850/UEB	5000K	1,100	82	129	17W	220°	60,000	120-277V	Yes	√ / √
37398	12T8/3F/830/UEB	3000K	1,400	82	117	25W	220°	60,000	120-277V	Yes	√ / √
37399	12T8/3F/835/UEB	3500K	1,400	82	117	25W	220°	60,000	120-277V	Yes	√ / √
37400	12T8/3F/840/UEB	4000K	1,450	82	121	25W	220°	60,000	120-277V	Yes	√ / √
37401	10T8/4F/830/UEB	3000K	1,650	82	165	32W	220°	60,000	120-277V	Yes	√ / √
37402	10T8/4F/835/UEB	3500K	1,650	82	165	32W	220°	60,000	120-277V	Yes	√ / √
37403	10T8/4F/840/UEB	4000K	1,700	82	170	32W	220°	60,000	120-277V	Yes	√ / √
37404	10T8/4F/850/UEB	5000K	1,700	82	170	32W	220°	60,000	120-277V	Yes	√ / √
37405	10T8/4F/840/UEB/C	4000K	1,700	82	170	32W	180°	60,000	120-277V	Yes	√ / √
37406	10T8/4F/850/UEB/C	5000K	1,700	82	170	32W	180°	60,000	120-277V	Yes	√ / √
37407	14T8/4F/835/UEB	3500K	2,100	82	150	32W	220°	60,000	120-277V	Yes	√ / √
37408	14T8/4F/840/UEB	4000K	2,200	82	157	32W	220°	60,000	120-277V	Yes	√ / √
37409	14T8/4F/850/UEB	5000K	2,200	82	157	32W	220°	60,000	120-277V	Yes	√ / √
37835	10T8/4F/840/UEB/SB	4000K	1,650	82	165	32W	220°	60,000	120-277V	Yes	√ / N.A.

INSTALLATION

Single Ended Bypass Installation

Double Ended Bypass Installation

T5 UEB LINE

SELECTDRIVE T5 UEB LINE




UNIVERSAL



UNIVERSAL



- Replaces 4’ T5 fluorescent lamp
- Integral driver suitable for 120-277V
- Single ended & Double ended installation (UEB)
- Very high light output
- NSF (National Sanitation Foundation) certified for Food Zone (Non-Contact), Splash, and Non-Food Zones

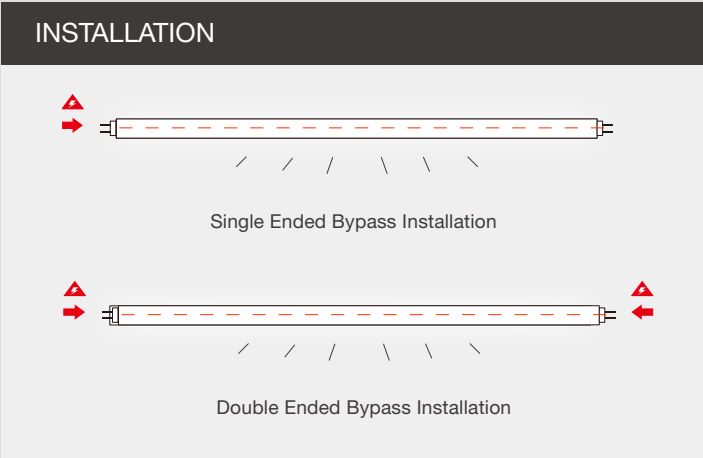

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC / NSF
36957	24T5HO/4F/830/UEB	3000K	3,200	82	133	54W	140°	50,000	120-277V	Yes	✓ / ✓
36958	24T5HO/4F/835/UEB	3500K	3,200	82	133	54W	140°	50,000	120-277V	Yes	✓ / ✓
36959	24T5HO/4F/840/UEB	4000K	3,200	82	133	54W	140°	50,000	120-277V	Yes	✓ / ✓
36960	24T5HO/4F/850/UEB	5000K	3,200	82	133	54W	140°	50,000	120-277V	Yes	✓ / ✓



- Replaces 4’ T5 fluorescent lamp
- Integral driver suitable for 120-277V
- Single & double ended installation (UEB)
- SelectDrive technology for field-selectable 3-level light outputs



3 Level power output

Power select switch allows power to be tailored to application requirements and can be adjusted from high to low.

Slide switch step dimming
Factory default setting:100% Lumen output
Dim the switch from 100% to 80% lumen.

Select Drive

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
36714	25.5T5HO/4F/830/UEB	3000K	3,400	82	133	54W	140°	60,000	120-277V	Yes	✓
36715	25.5T5HO/4F/835/UEB	3500K	3,400	82	133	54W	140°	60,000	120-277V	Yes	✓
36716	25.5T5HO/4F/840/UEB	4000K	3,700	82	145	54W	140°	60,000	120-277V	Yes	✓
36717	25.5T5HO/4F/850/UEB	5000K	3,700	82	145	54W	140°	60,000	120-277V	Yes	✓

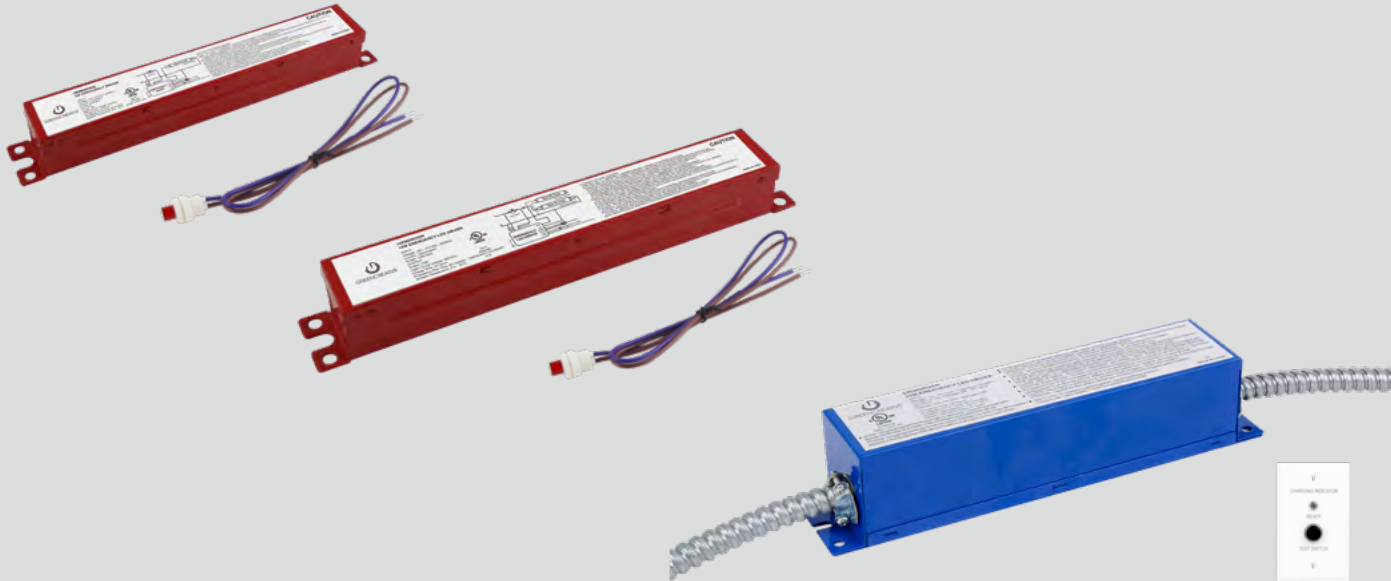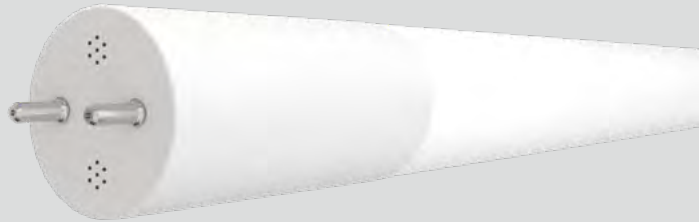


- Suitable for use with 120-277V power or with existing ballasts
- Utilizes existing lamp holders – Non-shunted or shunted
- Opaque glass provides glare free, even lighting with a 310° light emitting area
- NSF (National Sanitation Foundation) certified for Food Zone (Non-Contact), Splash, and Non-Food Zones

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
37114	12T8/4F/830/HYB/R	3000K	1800	82	150	32W	210°	60,000	120-277V	Yes	✓
37115	12T8/4F/835/HYB/R	3500K	1800	82	150	32W	210°	60,000	120-277V	Yes	✓
37116	12T8/4F/840/HYB/R	4000K	1800	82	150	32W	210°	60,000	120-277V	Yes	✓
37117	12T8/4F/850/HYB/R	5000K	1800	82	150	32W	210°	60,000	120-277V	Yes	✓
37118	15T8/4F/835/HYB/R	3500K	2200	82	147	32W	210°	60,000	120-277V	Yes	✓
37119	15T8/4F/840/HYB/R	4000K	2200	82	147	32W	210°	60,000	120-277V	Yes	✓
37120	15T8/4F/850/HYB/R	5000K	2200	82	147	32W	210°	60,000	120-277V	Yes	✓

- Suitable for use with select GREEN CREATIVE products
- Dual voltage 120/277 VAC 60Hz input
- Constant power output in emergency mode for a minimum of 90 minutes
- Meets or exceeds all National Electrical Code and Life Safety Code Emergency Lighting Requirements

SPECIFICATIONS								
Product	Model	Input Voltage	Output Power	Charge Time.	Emergency Run Time	Battery	Application	T20
34958	5EMDRIVER	120-277V	5W	24 hours	90 minutes	Hi-temp rechargeable Lithium-Ion	Select GREEN CREATIVE T8 retrofit lamps in ceilings 11' or less	N.A.
34959	10EMDRIVER	120-277V	10W	24 hours	90 minutes	Hi-temp rechargeable Lithium-Ion	Select GREEN CREATIVE T8 retrofit lamps in ceilings 17' or less	✓
98003	23EMDRIVER	120-277V	23W	24 hours	90 minutes	Hi-temp rechargeable Lithium-Ion	Select GREEN CREATIVE fixtures and lamps	✓

CCT SELECT T8 EXT

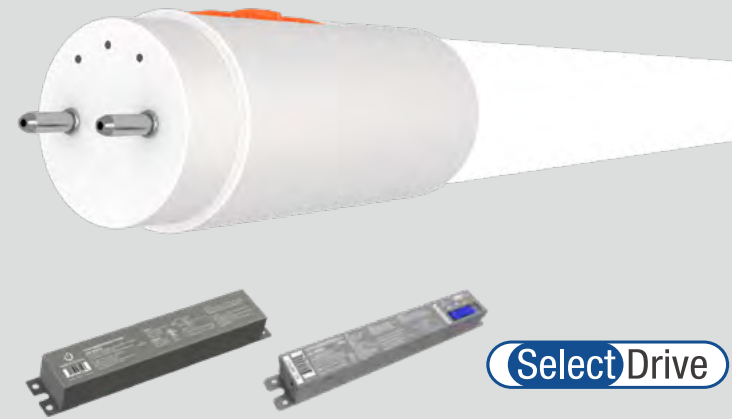

- Five field selectable color temperature
- Options of single wattage or SelectDrive external drivers
- Compatible with 0-10V controls, Flicker Free (<5% flicker)
- Utilizes existing lamp holders – shunted or non-shunted


FOCUS FEATURE

3000K 4000K 6500K
3500K 5000K

Select Kelvin


SPECIFICATIONS											
Product	Model	CCT	Lumens	LPW	CRI (typ.)	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
37223	9.5T8/2F/8CCTS/EXT	3000K	1,350	142	82	17W	220°	60,000	120-277V	Yes	✓
		3500K	1,400	147							
		4000K	1,500	158							
		5000K	1,500	158							
		6500K	1,500	158							
37224	10.5T8/3F/8CCTS/EXT	3000K	1,450	138	82	25W	220°	60,000	120-277V	Yes	✓
		3500K	1,500	143							
		4000K	1,600	152							
		5000K	1,600	152							
		6500K	1,600	152							
37225	11.5T8/4F/8CCTS/EXT	3000K	1,600	139	82	32W	220°	60,000	120-277V	Yes	✓
		3500K	1,650	143							
		4000K	1,700	148							
		5000K	1,700	148							
		6500K	1,700	148							
37226	14T8/4F/8CCTS/EXT	3000K	1,920	137	82	32W	220°	60,000	120-277V	Yes	✓
		3500K	2,000	143							
		4000K	2,050	146							
		5000K	2,050	146							
		6500K	2,050	146							
35896	15T8T5HEDRIVER/SD/2CH	15W / SelectDrive 120-277V with 0-10V Dimming External LED Driver for use with 1-2 T8/T5 HE Lamps									
35897	15T8T5HEDRIVER/SD/4CH	15W / SelectDrive 120-277V with 0-10V Dimming External LED Driver for use with 3-4 T8/T5 HE Lamps									
98259	15T8T5HEDRIVER/2CH/R	15W / 120-277V with 0-10V Dimming External LED Driver for use with 1-2 T8/T5 HE Lamps									
98260	15T8T5HEDRIVER/4CH/R	15W / 120-277V with 0-10V Dimming External LED Driver for use with 3-4 T8/T5 HE Lamps									
35797	FU10W/T5T8/EXT/EMDRIVER	10.7W EM Driver for use with EXT Type C TLED Systems									
35799	FU17W/T5T8/EXT/EMDRIVER	17W EM Driver for use with EXT Type C TLED Systems									

T8 EXT LINE

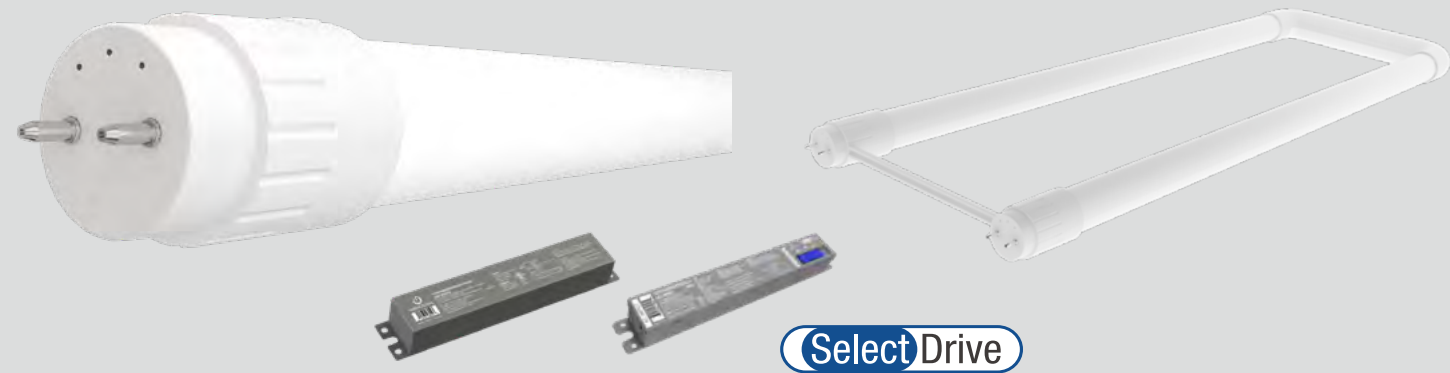

- Compatible with 0-10V controls
- Utilizes existing lamp holders – shunted or non-shunted
- Flicker Free (<5% flicker)
- Options of single wattage or SelectDrive external drivers

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
98326	9.5T8/2F/835/EXT	3500K	1,400	82	147	Yes	17W	160°	60,000	120-277V	Yes	✓
98327	9.5T8/2F/840/EXT	4000K	1,500	82	158	Yes	17W	160°	60,000	120-277V	Yes	✓
35671	9.5T8/2F/850/EXT	5000K	1,500	82	158	Yes	17W	160°	60,000	120-277V	Yes	✓
98328	10.5T8/3F/830/EXT	3000K	1,450	82	138	Yes	25W	160°	60,000	120-277V	Yes	✓
98329	10.5T8/3F/835/EXT	3500K	1,500	82	143	Yes	25W	160°	60,000	120-277V	Yes	✓
98330	10.5T8/3F/840/EXT	4000K	1,600	82	152	Yes	25W	160°	60,000	120-277V	Yes	✓
37121	11.5T8/4F/830/EXT/R	3000K	1600	82	139	Yes	32W	160°	60,000	120-277V	Yes	✓
37122	11.5T8/4F/835/EXT/R	3500K	1650	82	143	Yes	32W	160°	60,000	120-277V	Yes	✓
37123	11.5T8/4F/840/EXT/R	4000K	1700	82	148	Yes	32W	160°	60,000	120-277V	Yes	✓
37124	11.5T8/4F/850/EXT/R	5000K	1700	82	148	Yes	32W	160°	60,000	120-277V	Yes	✓
37125	14T8/4F/835/EXT/R	3500K	2000	82	143	Yes	32W	160°	60,000	120-277V	Yes	✓
37126	14T8/4F/840/EXT/R	4000K	2050	82	146	Yes	32W	160°	60,000	120-277V	Yes	✓
37127	14T8/4F/850/EXT/R	5000K	2050	82	146	Yes	32W	160°	60,000	120-277V	Yes	✓
98337	14.5T8U6/830/EXT	3000K	2,000	82	138	Yes	32W	160°	60,000	120-277V	Yes	✓
35461	14.5T8U6/835/EXT	3500K	2,000	82	138	Yes	32W	160°	60,000	120-277V	Yes	✓
98338	14.5T8U6/840/EXT	4000K	2,200	82	152	Yes	32W	160°	60,000	120-277V	Yes	✓
35896	15T8T5HEDRIVER/SD/2CH	15W / SelectDrive 120-277V with 0-10V Dimming External LED Driver for use with 1-2 T8/T5 HE Lamps										
35897	15T8T5HEDRIVER/SD/4CH	15W / SelectDrive 120-277V with 0-10V Dimming External LED Driver for use with 3-4 T8/T5 HE Lamps										
98259	15T8T5HEDRIVER/2CH/R	15W / 120-277V with 0-10V Dimming External LED Driver for use with 1-2 T8/T5 HE Lamps										
98260	15T8T5HEDRIVER/4CH/R	15W / 120-277V with 0-10V Dimming External LED Driver for use with 3-4 T8/T5 HE Lamps										
35797	FU10W/T5T8/EXT/EMDRIVER	10.7W EM Driver for use with EXT Type C TLED Systems										
35799	FU17W/T5T8/EXT/EMDRIVER	17W EM Driver for use with EXT Type C TLED Systems										

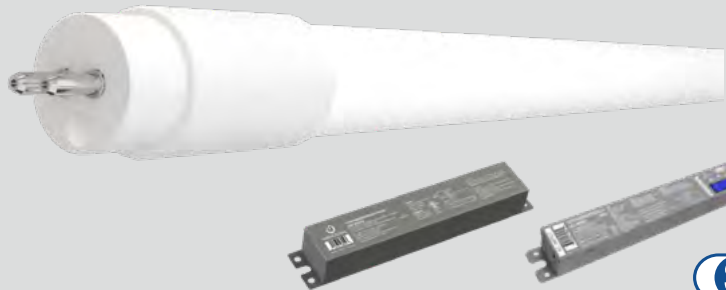


SelectDrive

- Compatible with 0-10V controls
- Utilizes existing lamp holders – shunted or non-shunted
- Flicker Free (<5% flicker)
- Options of single wattage or SelectDrive external drivers


SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
98306	9.5T5HE/2F/830/EXT	3000K	1,350	82	142	Yes	14W	120°	60,000	120-277V	Yes	N.A.
98307	9.5T5HE/2F/835/EXT	3500K	1,400	82	147	Yes	14W	120°	60,000	120-277V	Yes	N.A.
98308	9.5T5HE/2F/840/EXT	4000K	1,500	82	158	Yes	14W	120°	60,000	120-277V	Yes	N.A.
98310	11T5HE/3F/835/EXT	3500K	1,550	82	141	Yes	21W	120°	60,000	120-277V	Yes	N.A.
98311	11T5HE/3F/840/EXT	4000K	1,650	82	150	Yes	21W	120°	60,000	120-277V	Yes	N.A.
98312	13.5T5HE/4F/830/EXT	3000K	1,800	82	133	Yes	28W	120°	60,000	120-277V	Yes	✓
98313	13.5T5HE/4F/835/EXT	3500K	1,850	82	137	Yes	28W	120°	60,000	120-277V	Yes	✓
98314	13.5T5HE/4F/840/EXT	4000K	2,000	82	148	Yes	28W	120°	60,000	120-277V	Yes	✓
98321	22T5HO/4F/830/EXT	3000K	3,200	82	145	Yes	54W	120°	50,000	120-277V	Yes	✓
98322	22T5HO/4F/835/EXT	3500K	3,200	82	145	Yes	54W	120°	50,000	120-277V	Yes	✓
98323	22T5HO/4F/840/EXT	4000K	3,400	82	155	Yes	54W	120°	50,000	120-277V	Yes	✓
98324	22T5HO/4F/850/EXT	5000K	3,400	82	155	Yes	54W	120°	50,000	120-277V	Yes	✓
35896	15T8T5HEDRIVER/SD/2CH	15W / SelectDrive 120-277V with 0-10V Dimming External LED Driver for use with 1-2 T8/T5 HE Lamps										
35897	15T8T5HEDRIVER/SD/4CH	15W / SelectDrive 120-277V with 0-10V Dimming External LED Driver for use with 3-4 T8/T5 HE Lamps										
98259	15T8T5HEDRIVER/2CH/R	15W / 120-277V with 0-10V Dimming External LED Driver for use with 1-2 T8/T5 HE Lamps										
98260	15T8T5HEDRIVER/4CH/R	15W / 120-277V with 0-10V Dimming External LED Driver for use with 3-4 T8/T5 HE Lamps										
98261	24T5HODRIVER/2CH/R	24W / 120-277V with 0-10V Dimming External LED Driver for use with 1-2 T5 HO Lamps										
98262	24T5HODRIVER/4CH/R	24W / 120-277V with 0-10V Dimming External LED Driver for use with 3-4 T5 HO Lamps										
35797	FU10W/T5T8/EXT/EMDRIVER	10.7W EM Driver for use with EXT Type C TLED Systems										
35799	FU17W/T5T8/EXT/EMDRIVER	17W EM Driver for use with EXT Type C TLED Systems										

Flicker Free


Our external drivers are compatible with a wide range of dimming systems at 0-10V, provide flicker free lighting performance, and support energy compliance to most building codes.



FLICKER FREE



With Flicker



No Flicker


SelectDrive Technology

Field Selectable lumen outputs & Dim-To-Off

SelectDrive external driver enables users to choose from three field-selectable lumen outputs with just the flip of a switch. Meet a variety of lighting needs with just one product.

The SelectDrive external drivers also provide smooth Dim-To-Off performance, enabling even more lighting control flexibility.

SelectDrive

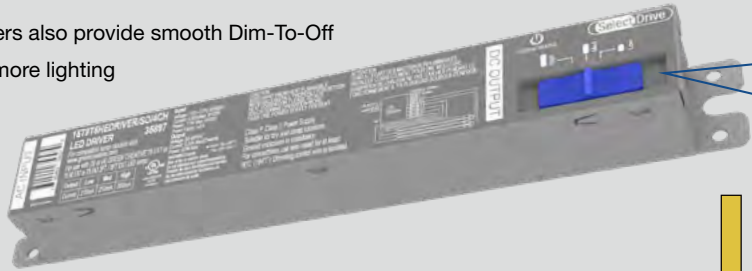

HIGH


14W / 2000lm

MED

11W / 1600lm

LOW

9W / 1300lm




DIM TO OFF



(Based on using 14T8/4F/840/EXT)

Parallel Outputs Design

Parallel outputs design require no minimum lamp load to operate properly. This eliminates the risk of lamp damage from overloads regardless of the number of lamps connected. The 2 channel driver can be used for 1-2 lamps, and the 4 channel driver can be used for 1-4 lamps without number of lamps limitation.

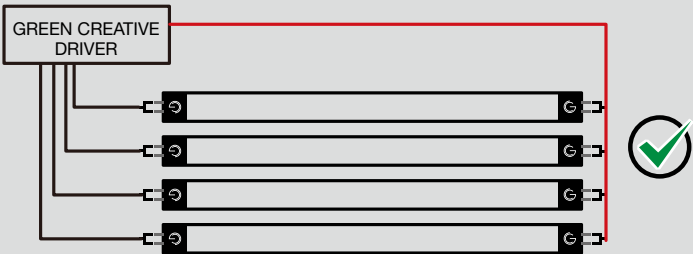


Suitable for Hazardous Location


Single wattage driver is UL Type HL Certified

Single wattage external driver is UL Type HL certified (Class 1 Division 2 UL844 Listed), thus can be used directly for lamps installed in hazardous (classified) location areas without further evaluation.

- Chemical Processing Facilities
- Industrial & Manufacturing Plants
- Ethanol & Petroleum Refineries
- Wastewater & Treatment Facilities
- Power Generation Facilities
- Food and Beverage Preparation
- Coolers / Freezers




PLL DIR LINE

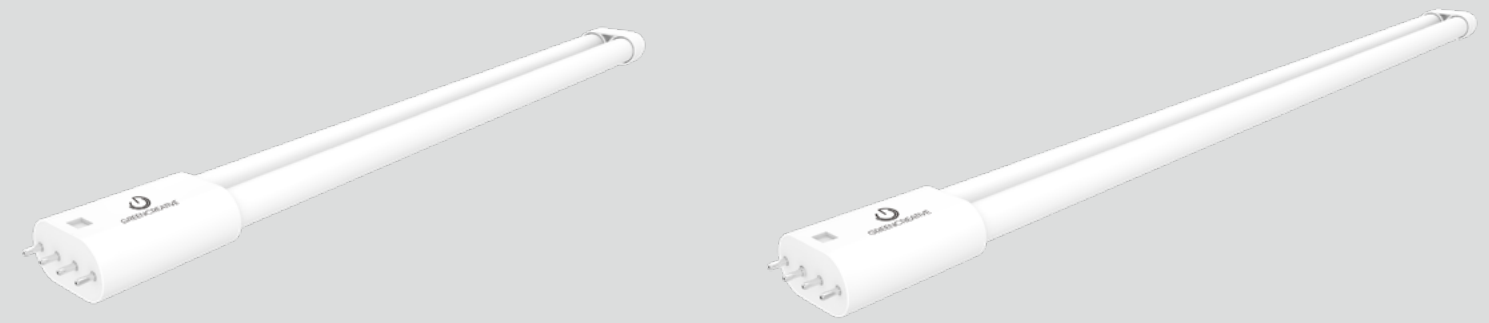

- Plug & Play installation
- Instant Start & Programmed Start ballast compatible
- Plastic film prevents glass from shattering
- Installs into 2G11 sockets
- 0-10V dimmable (ballast dependent)



SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
36777	13PLL/830/GL/DIR/R	3000K	2,050	82	158	Yes	40W	160°	50,000	120-277V	Yes	✓
36778	13PLL/835/GL/DIR/R	3500K	2,100	82	162	Yes	40W	160°	50,000	120-277V	Yes	✓
36779	13PLL/840/GL/DIR/R	4000K	2,100	82	162	Yes	40W	160°	50,000	120-277V	Yes	✓
98488	14.5PLL/835/GL/DIR	3500K	1,950	82	134	Yes	36W	160°	50,000	120-277V	Yes	N.A.
98489	14.5PLL/840/GL/DIR	4000K	2,000	82	138	Yes	36W	160°	50,000	120-277V	Yes	N.A.

PLL BYP LINE

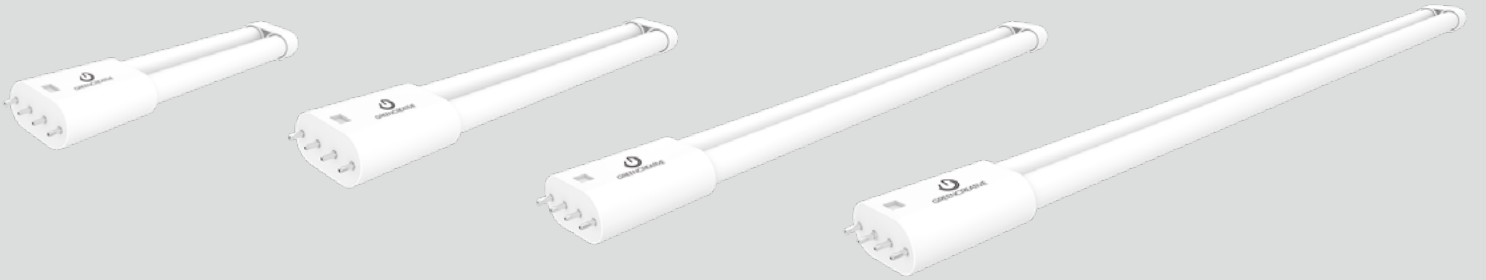



- Integral driver suitable for 120-277V
- Replaces 18W / 24W / 36W / 40W 4-pin (2G11) CFL lamps
- High efficacy up to 138 LPW
- Plastic film prevents glass from shattering

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
34858	8.5PLL/835/GL/BYP	3500K	950	82	112	18W	160°	50,000	120-277V	Yes	N.A.
34859	8.5PLL/840/GL/BYP	4000K	980	82	115	18W	160°	50,000	120-277V	Yes	N.A.
34861	10PLL/835/GL/BYP	3500K	1,200	82	120	24W	160°	50,000	120-277V	Yes	N.A.
34862	10PLL/840/GL/BYP	4000K	1,250	82	125	24W	160°	50,000	120-277V	Yes	N.A.
34864	16PLL/835/GL/BYP	3500K	1,950	82	122	36W	160°	50,000	120-277V	Yes	N.A.
34865	16PLL/840/GL/BYP	4000K	2,000	82	125	36W	160°	50,000	120-277V	Yes	N.A.
36983	17PLL/830/BYP/R	3000K	2,050	82	121	40W	160°	50,000	120-277V	Yes	√
36984	17PLL/835/BYP/R	3500K	2,150	82	126	40W	160°	50,000	120-277V	Yes	√
36985	17PLL/840/BYP/R	4000K	2,200	82	129	40W	160°	50,000	120-277V	Yes	√

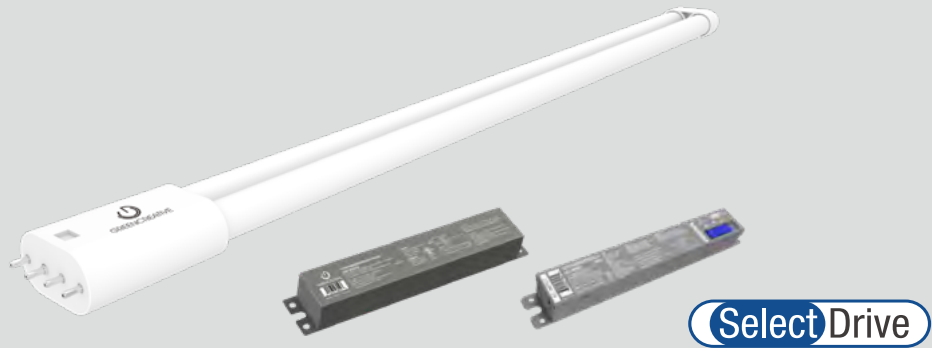



- Options of single wattage or SelectDrive external drivers
- Replaces 36W / 40W 4-pin (2G11) CFL lamps
- 0-10V dimming
- Suitable for use in enclosed fixtures

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
36704	13PLL/835/EXT	3500K	1,800	82	138	Yes	36W	110°	50,000	120-277V	Yes	N.A.
36705	13PLL/840/EXT	4000K	2,000	82	154	Yes	36W	110°	50,000	120-277V	Yes	N.A.
36707	14PLL/835/EXT	3500K	2,000	82	143	Yes	40W	140°	50,000	120-277V	Yes	✓
36708	14PLL/840/EXT	4000K	2,200	82	157	Yes	40W	140°	50,000	120-277V	Yes	✓
36710	19PLL/835/EXT	3500K	2,600	82	137	Yes	40W	140°	50,000	120-277V	Yes	✓
36711	19PLL/840/EXT	4000K	2,800	82	147	Yes	40W	140°	50,000	120-277V	Yes	✓
35896	15T8T5HEDRIVER/SD/2CH	15W / SelectDrive 120-277V with 0-10V Dimming External LED Driver for use with 1-2 PLL EXT Lamps										
35897	15T8T5HEDRIVER/SD/4CH	15W / SelectDrive 120-277V with 0-10V Dimming External LED Driver for use with 1-4 PLL EXT Lamps										
98259	15T8T5HEDRIVER/2CH/R	15W / 120-277V with 0-10V Dimming External LED Driver for use with 1-2 PLL EXT Lamps										
98260	15T8T5HEDRIVER/4CH/R	15W / 120-277V with 0-10V Dimming External LED Driver for use with 1-4 PLL EXT Lamps										
98261	24T5HODRIVER/2CH/R	24W / 120-277V with 0-10V Dimming External LED Driver for use with 1-2 PLL EXT Lamps										
98262	24T5HODRIVER/4CH/R	24W / 120-277V with 0-10V Dimming External LED Driver for use with 1-4 PLL EXT Lamps										
35797	FU10W/T5T8/EXT/EMDRIVER	10.7W EM Driver for use with EXT Type C PLL Systems										
35799	FU17W/T5T8/EXT/EMDRIVER	17W EM Driver for use with EXT Type C PLL Systems										

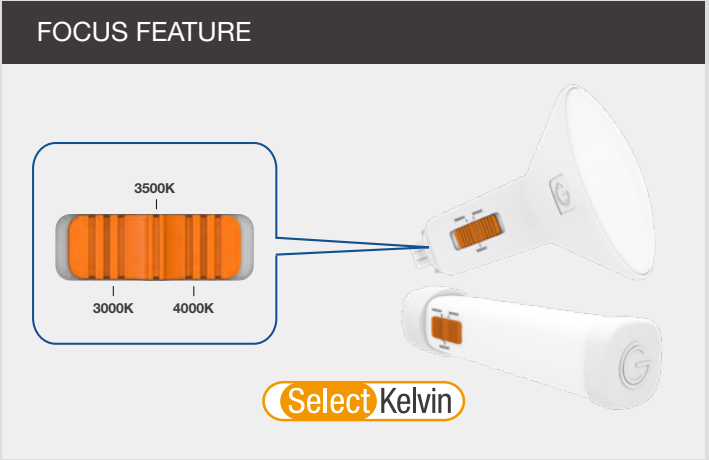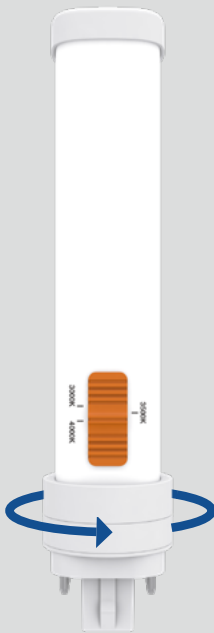

- Plug & Play installation (electronic ballasts only)
- Three field selectable color temperature
- Compatible with G24q & GX24q sockets
- 310° rotatable base (horizontal model) allows light to be directed as needed
- Compatible with select 0-10V dimmable ballasts and controls

SPECIFICATIONS												
Product	Model	CCT	Lumens	LPW	CRI (typ.)	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
37086	8.5PLH/8CCTS/DIR	3000K	1,000	109	82	Yes	26W	110°	50,000	120-277V	No	✓
		4000K	1,050	124								
37087	9.5PLV/8CCTS/DIR	3000K	1,100	116	82	Yes	26W	120°	50,000	120-277V	No	✓
		4000K	1,150	121								

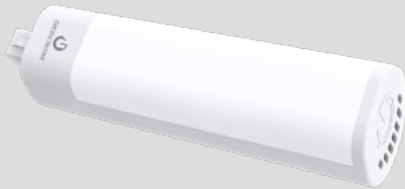

- Plug & Play installation (electronic ballasts only)
- Compatible with G24q & GX24q sockets
- 310° rotatable base allows light to be directed as needed
- Compatible with select 0-10V dimmable ballasts and controls
- Ballast Adaptive Technology allows one LED lamp to be powered by a range of fluorescent ballasts instead of restricting to one wattage rating

High Flexibility - Ballast Adaptive Technology		
Ballast Type	Lumens	Bare Lamp
13W	600	4.5W
18W	700	5.5W
26W	1020	8.5W
PL H 8.5W DIR		

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
57895	5.5PLH/827/DIR/RC	2700K	520	82	95	Yes	13-18W	110°	50,000	120-277V	No	N.A.
57896	5.5PLH/830/DIR/RC	3000K	550	82	100	Yes	13-18W	110°	50,000	120-277V	No	N.A.
57897	5.5PLH/835/DIR/RC	3500K	550	82	100	Yes	13-18W	110°	50,000	120-277V	No	N.A.
57898	5.5PLH/840/DIR/RC	4000K	560	82	102	Yes	13-18W	110°	50,000	120-277V	No	N.A.
28366	8.5PLH/827/DIR/R	2700K	870	82	102	Yes	26W	110°	50,000	120-277V	No	✓
28367	8.5PLH/830/DIR/R	3000K	950	82	112	Yes	26W	110°	50,000	120-277V	No	✓
28368	8.5PLH/835/DIR/R	3500K	950	82	112	Yes	26W	110°	50,000	120-277V	No	✓
28369	8.5PLH/840/DIR/R	4000K	1,020	82	120	Yes	26W	110°	50,000	120-277V	No	✓
57903	10.5PLH/930/DIR	3000K	890	92	85	Yes	26W	110°	50,000	120-277V	No	N.A.
98245	14.5PLH/835/DIR	3500K	1,750	82	121	Yes	42W	110°	50,000	120-277V	No	N.A.
98246	14.5PLH/840/DIR	4000K	1,800	82	124	Yes	42W	110°	50,000	120-277V	No	N.A.







- Plug & Play installation (electronic ballasts only)
- Compatible with G24q & GX24q sockets
- Patented design
- Compatible with select 0-10V dimmable ballasts and controls
- Ballast Adaptive Technology allows one LED lamp to be powered by a range of fluorescent ballasts instead of restricting to one wattage rating

High Flexibility - Ballast Adaptive Technology		
Ballast Type	Lumens	Bare Lamp
13W	590	5W
18W	820	6W
26W	1020	9.5W
PL V 9.5W DIR		

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
28370	6PLV/827/DIR/R	2700K	600	82	100	Yes	13-18W	120°	50,000	120-277V	No	N.A.
28371	6PLV/830/DIR/R	3000K	620	82	103	Yes	13-18W	120°	50,000	120-277V	No	N.A.
28372	6PLV/835/DIR/R	3500K	620	82	103	Yes	13-18W	120°	50,000	120-277V	No	N.A.
28373	6PLV/840/DIR/R	4000K	640	82	107	Yes	13-18W	120°	50,000	120-277V	No	N.A.
28374	9.5PLV/827/DIR/R	2700K	950	82	100	Yes	26W	120°	50,000	120-277V	No	✓
28375	9.5PLV/830/DIR/RC	3000K	1,000	82	105	Yes	26W	120°	50,000	120-277V	No	✓
28376	9.5PLV/835/DIR/RC	3500K	1,000	82	105	Yes	26W	120°	50,000	120-277V	No	✓
28377	9.5PLV/840/DIR/RC	4000K	1,020	82	107	Yes	26W	120°	50,000	120-277V	No	✓
57918	11PLV/930/DIR/R	3000K	920	92	84	Yes	26W	120°	50,000	120-277V	No	N.A.
98248	17PLV/830/DIR	3000K	1,900	82	112	Yes	42W	120°	50,000	120-277V	No	✓
98250	17PLV/840/DIR	4000K	2,000	82	118	Yes	42W	120°	50,000	120-277V	No	✓

CCT SELECT PL BYP / HYBM LINE

PL BYP / HYBM LINE

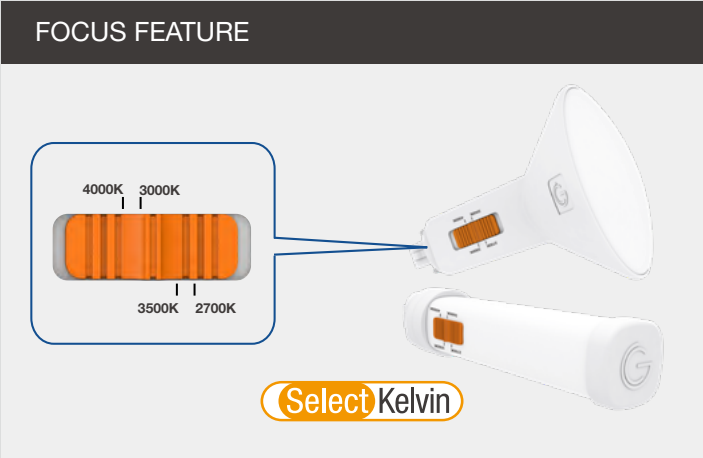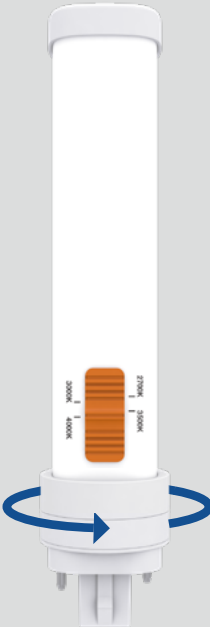

- **HYBrid installation - DIrect or BYPass**
- **Four field selectable color temperature**
- **Compatible with magnetic ballasts - DIrect installat**
- **Built-in universal voltage driver - BYPass installation**
- **310° rotatable base (horizontal model) allows light to be directed as needed**

SPECIFICATIONS											
Product	Model	CCT	Lumens	LPW	CRI (typ.)	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
37084	8PLH/8CCTS/HYBM	2700K	870	109	82	Yes	26W	110°	50,000	120-277V	No
		3000K	920	115							
		3500K	1,000	125							
		4000K	1,000	125							
37085	8PLV/8CCTS/HYBM	2700K	1,000	125	82	Yes	26W	120°	50,000	120-277V	No
		3000K	1,050	131							
		3500K	1,100	138							
		4000K	1,100	138							



- **HYBrid installation - DIrect or BYPass**
- **Compatible with magnetic ballasts - DIrect installation**
- **Built-in universal voltage driver - BYPass installation**
- **310° rotatable base allows light to be directed as needed**

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
36086	5.5PLH/827/HYBM	2700K	550	82	100	No	13-18W	110°	50,000	120-277V	No
34856	5.5PLH/830/HYBM	3000K	550	82	100	No	13-18W	110°	50,000	120-277V	No
36642	5.5PLH/835/HYBM/R	3500K	600	82	109	No	13-18W	110°	50,000	120-277V	No
36643	5.5PLH/840/HYBM/R	4000K	620	82	113	No	13-18W	110°	50,000	120-277V	No
98399	8PLH/827/HYBM	2700K	870	82	109	No	26W	110°	50,000	120-277V	No
98400	8PLH/830/HYBM	3000K	920	82	115	No	26W	110°	50,000	120-277V	No
98401	8PLH/835/HYBM	3500K	920	82	115	No	26W	110°	50,000	120-277V	No
98402	8PLH/840/HYBM	4000K	950	82	119	No	26W	110°	50,000	120-277V	No
36640	15.5PLH/835/BYP/R	3500K	1,950	82	126	No	42W	110°	50,000	120-277V	No
36641	15.5PLH/840/BYP/R	4000K	2,000	82	129	No	42W	110°	50,000	120-277V	No

Note: PL H 15.5W BYP operates on line voltage only and is not compatible with magnetic ballasts

PL BYP / HYBM LINE





- **HYBrid installation - DIRect or BYPass**
- **Compatible with magnetic ballasts - DIRect installation**
- **Built-in universal voltage driver - BYPass installation**
- **Patented design**

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
98385	5.5PLV/835/HYBM	3500K	600	82	109	No	13-18W	120°	50,000	120-277V	No
98386	5.5PLV/840/HYBM	4000K	620	82	113	No	13-18W	120°	50,000	120-277V	No
98387	8.5PLV/827/HYBM	2700K	950	82	112	No	26W	120°	50,000	120-277V	No
98388	8.5PLV/830/HYBM	3000K	1,000	82	118	No	26W	120°	50,000	120-277V	No
98389	8.5PLV/835/HYBM	3500K	1,000	82	118	No	26W	120°	50,000	120-277V	No
98390	8.5PLV/840/HYBM	4000K	1,020	82	120	No	26W	120°	50,000	120-277V	No
98256	16.5PLV/830/BYP	3000K	1,800	82	109	No	42W	120°	50,000	120-277V	No
98257	16.5PLV/835/BYP	3500K	1,850	82	112	No	42W	120°	50,000	120-277V	No
98258	16.5PLV/840/BYP	4000K	1,900	82	115	No	42W	120°	50,000	120-277V	No

Note: PL V 16.5W BYP operates on line voltage only and is not compatible with magnetic ballasts




PLS BYP LINE



- **BYPass installation – Requires bypassing the ballast**
- **Suitable for use in totally enclosed fixtures**
- **180° rotatable base**
- **Compact form factor fits most fixtures**



SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
36631	3.5PLS/835/BYP/2G7/R	3500K	350	82	100	No	7-9W	120°	50,000	120-277V	Yes
36637	5.5PLS/835/BYP/2GX7/R	3500K	600	82	109	No	13W	120°	50,000	120-277V	Yes

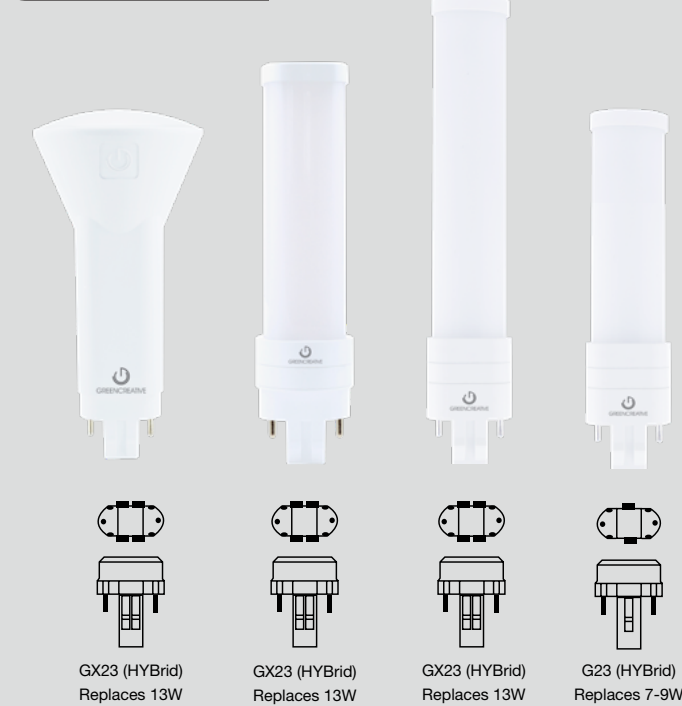

170° Rotatable Base




- **HYBrid installation - DIrect or BYPass**
- **Compatible with magnetic ballasts - DIrect installation**
- **Built-in universal voltage driver - BYPass installation**
- **Exceptional efficacy**

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
36627	3.5PLS/827/HYB/G23/R	2700K	325	82	93	No	7-9W	120°	50,000	120-277V	Yes
36628	3.5PLS/830/HYB/G23/R	3000K	340	82	97	No	7-9W	120°	50,000	120-277V	Yes
36629	3.5PLS/835/HYB/G23/R	3500K	350	82	100	No	7-9W	120°	50,000	120-277V	Yes
36630	3.5PLS/840/HYB/G23/R	4000K	370	82	106	No	7-9W	120°	50,000	120-277V	Yes
98403	5.5PLSV/827/HYB/GX23	2700K	570	82	104	No	13W	120°	50,000	120-277V	No
98404	5.5PLSV/830/HYB/GX23	3000K	600	82	109	No	13W	120°	50,000	120-277V	No
98405	5.5PLSV/835/HYB/GX23	3500K	600	82	109	No	13W	120°	50,000	120-277V	No
98406	5.5PLSV/840/HYB/GX23	4000K	620	82	113	No	13W	120°	50,000	120-277V	No
36644	5.5PLSH/827/HYB/GX23/R	2700K	570	82	104	No	13W	110°	50,000	120-277V	No
36645	5.5PLSH/830/HYB/GX23/R	3000K	580	82	105	No	13W	110°	50,000	120-277V	No
36646	5.5PLSH/835/HYB/GX23/R	3500K	600	82	109	No	13W	110°	50,000	120-277V	No
36647	5.5PLSH/840/HYB/GX23/R	4000K	620	82	113	No	13W	110°	50,000	120-277V	No
36632	5.5PLS/827/HYB/GX23/R	2700K	520	82	95	No	13W	120°	50,000	120-277V	Yes
36633	5.5PLS/830/HYB/GX23/R	3000K	550	82	100	No	13W	120°	50,000	120-277V	Yes
36634	5.5PLS/835/HYB/GX23/R	3500K	600	82	109	No	13W	120°	50,000	120-277V	Yes
36635	5.5PLS/840/HYB/GX23/R	4000K	620	82	113	No	13W	120°	50,000	120-277V	Yes



FOCUS FEATURE




Select Kelvin


- **Plug & Play installation (electronic ballasts only)**
- **Omni directional light distribution suitable for horizontal or vertical installations**
- **Three field selectable color temperature**
- **Replaces G24q & GX24q (4-pin) 13W-26W CFL lamps**
- **0-10V dimming ballast compatible**

SPECIFICATIONS											
Product	Model	CCT	Lumens	LPW	CRI (typ.)	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
37089	9.5PLO/8CCTS/DIR	3000K	1,150	121	82	Yes	26W	360°	50,000	120-277V	Yes
		3500K	1,200	126							
		4000K	1,200	126							


PLO DIR LINE



Horizontal Installation




Vertical Installation

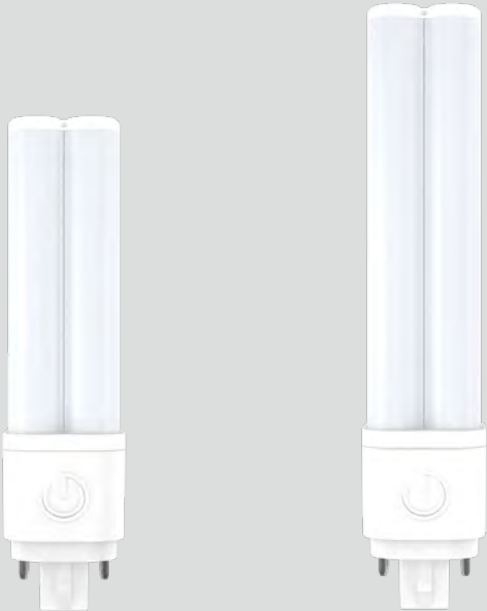


- Plug & Play installation (electronic ballasts only)
- Omni directional light distribution suitable for horizontal or vertical installations
- Replaces G24q & GX24q (4-pin) 13W-26W CFL lamps
- 0-10V dimming ballast compatible

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
34988	6.5PLO/827/DIR	2700K	720	82	110	Yes	13-18W	360°	50,000	120-277V	Yes
34989	6.5PLO/830/DIR	3000K	740	82	113	Yes	13-18W	360°	50,000	120-277V	Yes
34990	6.5PLO/835/DIR	3500K	780	82	120	Yes	13-18W	360°	50,000	120-277V	Yes
34991	6.5PLO/840/DIR	4000K	800	82	123	Yes	13-18W	360°	50,000	120-277V	Yes
34992	9.5PLO/827/DIR	2700K	1,050	82	110	Yes	26W	360°	50,000	120-277V	Yes
34993	9.5PLO/830/DIR	3000K	1,100	82	115	Yes	26W	360°	50,000	120-277V	Yes
34994	9.5PLO/835/DIR	3500K	1,150	82	121	Yes	26W	360°	50,000	120-277V	Yes
34995	9.5PLO/840/DIR	4000K	1,200	82	126	Yes	26W	360°	50,000	120-277V	Yes

PLO HYBM LINE



Horizontal Installation



Vertical Installation



- Compatible with magnetic ballasts - DIReCT installation
- Built-in universal voltage driver - BYPass installation
- Omni directional light distribution suitable for horizontal or vertical installations
- Replaces G24q & GX24q (4-pin) or G24d & GX24d (2-pin) 13W-26W CFL lamps


SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
34997	7PLO/830/HYBM	3000K	790	82	112	No	13-18W	360°	50,000	120-277V	Yes
34998	7PLO/835/HYBM	3500K	820	82	117	No	13-18W	360°	50,000	120-277V	Yes
34999	7PLO/840/HYBM	4000K	850	82	121	No	13-18W	360°	50,000	120-277V	Yes
35000	9PLO/827/HYBM	2700K	1,100	82	122	No	26W	360°	50,000	120-277V	Yes
35001	9PLO/830/HYBM	3000K	1,150	82	125	No	26W	360°	50,000	120-277V	Yes
35002	9PLO/835/HYBM	3500K	1,200	82	130	No	26W	360°	50,000	120-277V	Yes
35003	9PLO/840/HYBM	4000K	1,250	82	133	No	26W	360°	50,000	120-277V	Yes

CCT SELECT PINFIT PL OMNI LINE

PINFIT PL OMNI LINE



FOCUS FEATURE

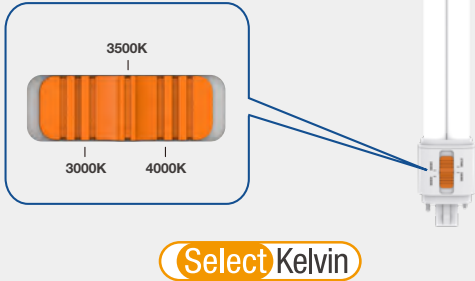

- Patented modular socket design making lamp versatile with 2 different pins models
- Embedded universal driver suitable for electronic ballast, magnetic ballast or no-ballast environments
- Omni directional light distribution replaces G24d, GX24d, G24q & GX24q CFL lamps
- Three field selectable color temperature

SPECIFICATIONS											
Product	Model	CCT	Lumens	LPW	CRI (typ.)	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
37088	9PLO/8CCTS/HYB/PF	3000K	1,150	128	82	Yes	26W	360°	50,000	120-277V	Yes
		3500K	1,200	133							
		4000K	1,200	133							



- Patented modular socket design making lamp versatile with 2 different pins models
- Embedded universal driver suitable for electronic ballast, magnetic ballast or no-ballast environments
- Omni directional light distribution replaces G24d, GX24d, G24q & GX24q CFL lamps

Evolution in Retrofitting




SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
36732	6.8PLO/827/HYB/PF	2700K	720	82	106	No	13-18W	360°	50,000	120-277V	Yes
36733	6.8PLO/830/HYB/PF	3000K	740	82	109	No	13-18W	360°	50,000	120-277V	Yes
36734	6.8PLO/835/HYB/PF	3500K	800	82	118	No	13-18W	360°	50,000	120-277V	Yes
36735	6.8PLO/840/HYB/PF	4000K	800	82	118	No	13-18W	360°	50,000	120-277V	Yes
36736	9PLO/827/HYB/PF	2700K	1,050	82	117	Yes	26W	360°	50,000	120-277V	Yes
36737	9PLO/830/HYB/PF	3000K	1,100	82	122	Yes	26W	360°	50,000	120-277V	Yes
36738	9PLO/835/HYB/PF	3500K	1,150	82	128	Yes	26W	360°	50,000	120-277V	Yes
36739	9PLO/840/HYB/PF	4000K	1,150	82	128	Yes	26W	360°	50,000	120-277V	Yes

Versatility in Installation

The revolutionary modular socket design of the PinFit PL Omni allows for easy switching of the lamp socket from G24q (4 pin) to G24d (2 pin) in the field, offering ultimate installation versatility.


Simply use a screwdriver to pry open the buckle to remove the standard 4 pin modular socket, transforming from a 4 pin to a 2 pin compatible lamp in seconds.

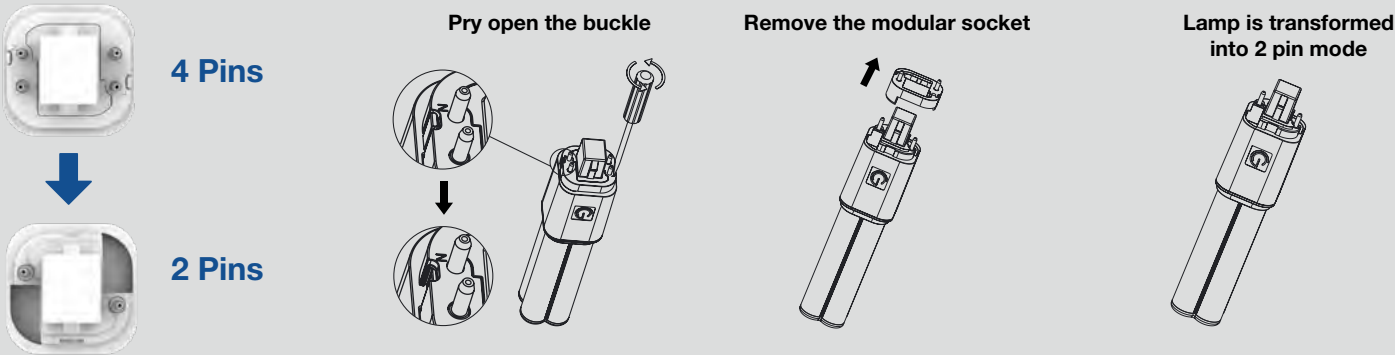

Optimal Field Flexibility

An embedded universal driver allows the PinFit PL Omni to perform with electronic ballasts at 4 pin mode, and magnetic ballasts or no-ballast environments at 2 pin mode, providing optimal field flexibility for both DIrect and BYPass installations with only one lamp.

Eliminate ballast compatibility issues, greatly reduce the time to audit a space, and optimize stock management costs.

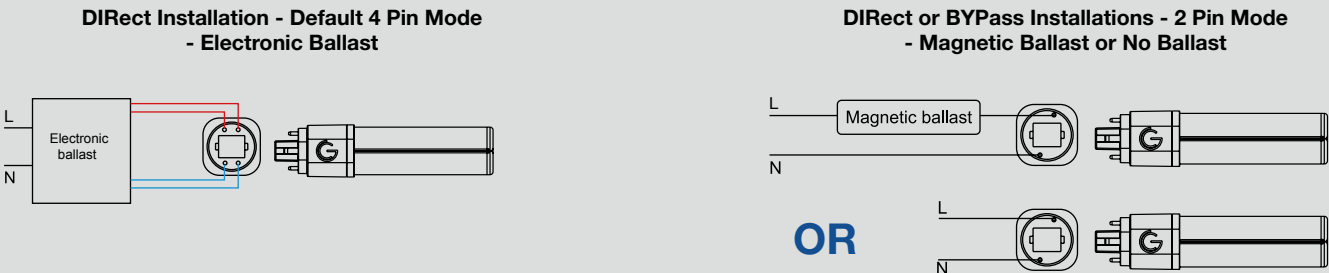

Omnidirectional Lighting

The lamps can be installed either vertically or horizontally with 360° omni-directional light distribution, creating a uniform and pleasant lighting effect equivalent to fluorescent lamps.



- Integral driver suitable for 120-277V
- E26 version is dimmable at 120V line voltage
- EX39 version has integrated side switch for field selectable lumen output
- Suitable for use in totally enclosed fixtures
- Integral 6kV surge protector

3 Level power output



Power select switch allows light output to be tailored to application requirements and can be adjusted from high to low.



SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	DLC / ES
36165	17A21/830/277V/DIM	3000K	2,000	82	118	Yes	125W	230°	50,000	120-277V	N.A. / ✓
36166	17A21/835/277V/DIM	3500K	2,000	82	118	Yes	125W	230°	50,000	120-277V	N.A. / ✓
36167	17A21/840/277V/DIM	4000K	2,100	82	124	Yes	125W	230°	50,000	120-277V	N.A. / ✓
36168	17A21/850/277V/DIM	5000K	2,100	82	124	Yes	125W	230°	50,000	120-277V	N.A. / ✓
36169	24HID/830/277V/E26/DIM	3000K	3,100	82	129	Yes	200W	230°	50,000	120-277V	N.A. / ✓
36214	24HID/835/277V/E26/DIM	3500K	3,100	82	129	Yes	200W	230°	50,000	120-277V	N.A. / ✓
36170	24HID/840/277V/E26/DIM	4000K	3,200	82	133	Yes	200W	230°	50,000	120-277V	N.A. / ✓
36171	24HID/850/277V/E26/DIM	5000K	3,200	82	133	Yes	200W	230°	50,000	120-277V	N.A. / ✓
36158	24HID/830/277V/EX39/SD	3000K	3,100	82	129	No	200W	230°	50,000	120-277V	✓ / N.A.
36159	24HID/835/277V/EX39/SD	3500K	3,100	82	129	No	200W	230°	50,000	120-277V	✓ / N.A.
36160	24HID/840/277V/EX39/SD	4000K	3,200	82	133	No	200W	230°	50,000	120-277V	✓ / N.A.
36161	24HID/850/277V/EX39/SD	5000K	3,200	82	133	No	200W	230°	50,000	120-277V	✓ / N.A.
36173	34HID/840/277V/E26/DIM	4000K	5,000	82	147	Yes	300W	230°	50,000	120-277V	N.A. / ✓
36174	34HID/850/277V/E26/DIM	5000K	5,000	82	147	Yes	300W	230°	50,000	120-277V	N.A. / ✓
36163	34HID/840/277V/EX39/SD	4000K	5,000	82	147	No	175W	230°	50,000	120-277V	✓ / N.A.
36164	34HID/850/277V/EX39/SD	5000K	5,000	82	147	No	175W	230°	50,000	120-277V	✓ / N.A.
16325	E26 EXTENDER	E26 Lamp Extender Adds 1.30" (33mm) to Lamp Height									
35050	EX39 EXTENDER	EX39 Lamp Extender Adds 1.70" (43mm) to Lamp Height									
97718	10SURGE/277V	10kV Surge Protector									



- 175W/250W/400W HID replacements
- Integrated rotary dimmer control
- Integral 6kV surge protector
- Thermal protection against overheating

Integral Rotary Dimming Control

Factory default setting: 100% lumen output

Rotate counterclockwise to reduce lumen output



Rotate clockwise to increase the lumen output

Integral dimming control allows light output to be tailored to application requirements and can be adjusted from 0-100% with no additional wiring or controls needed.

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
35887	54HID/840/277V/EX39/RC	4000K	7,700	82	143	175-250W	320°	50,000	120-277V	Yes	✓
35888	54HID/850/277V/EX39/RC	5000K	7,700	82	143	175-250W	320°	50,000	120-277V	Yes	✓
35889	63HID/840/277V/EX39/RC	4000K	9,500	82	150	175-250W	320°	50,000	120-277V	Yes	✓
35890	63HID/850/277V/EX39/RC	5000K	9,500	82	150	175-250W	320°	50,000	120-277V	Yes	✓
35891	100HID/840/277V/EX39/RC	4000K	14,500	82	145	250-400W	320°	50,000	120-277V	Yes	✓
35892	100HID/850/277V/EX39/RC	5000K	14,500	82	145	250-400W	320°	50,000	120-277V	Yes	✓
35050	EX39 EXTENDER	EX39 Lamp Extender Adds 1.70" (43mm) to Lamp Height									
97718	10SURGE/277V	10kV Surge Protector									



E26 Version Available


- Integral driver suitable for 120-277V
- Visible uplighting
- Compatible with EX39 & E39 sockets
- Exceptional efficacy >126 LPW

Intentional Uplighting

All High Bay and Low Bay products feature a ring of LEDs mounted around the base to provide visible uplighting for improved aesthetics and comfort



SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
35089	35HIDLB/840/BYP/E26/R	4000K	4,550	82	130	No	100-175W HID	110°	50,000	120-277V	No	N.A.
35090	35HIDLB/850/BYP/E26/R	5000K	4,650	82	133	No	100-175W HID	110°	50,000	120-277V	No	N.A.
35087	35HIDLB/840/BYP/EX39/R	4000K	4,550	82	130	No	100-175W HID	110°	50,000	120-277V	No	N.A.
35092	65HIDHB/850/BYP/EX39/R	5000K	9,100	82	140	No	175-250W HID	110°	50,000	120-277V	No	N.A.
35093	90HIDHB/840/BYP/EX39/R	4000K	12,420	82	138	No	250-400W HID	110°	50,000	120-277V	No	N.A.

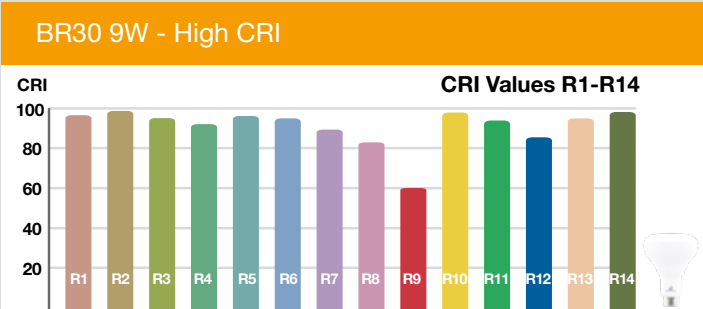


- Suitable to replace 45W-85W incandescent lamps
- Dimmable with forward and reverse phase controls
- Suitable for use in totally enclosed fixtures
- Suitable for use in damp locations

SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Power Factor	Beam Angle	Life (hrs)	Voltage	Encl.	ES / JA8 / T20
36688	7R20DIM/927	2700K	590	93	84	Yes	45W	0.7	120°	25,000	120V	Yes	✓ / N.A. / ✓
36689	7R20DIM/930	3000K	590	93	84	Yes	45W	0.7	120°	25,000	120V	Yes	✓ / N.A. / ✓
36690	7R20DIM/940	4000K	590	93	84	Yes	45W	0.7	120°	25,000	120V	Yes	✓ / N.A. / ✓
35049	8BR30DIM927/GU24	2700K	720	92	90	Yes	65W	0.9	120°	25,000	120V	Yes	✓ / ✓ / ✓
36691	9BR30DIM/927	2700K	770	93	86	Yes	65W	0.7	120°	25,000	120V	Yes	✓ / N.A. / ✓
36692	9BR30DIM/930	3000K	770	93	86	Yes	65W	0.7	120°	25,000	120V	Yes	✓ / N.A. / ✓
36693	9BR30DIM/940	4000K	770	93	86	Yes	65W	0.7	120°	25,000	120V	Yes	✓ / N.A. / ✓
36694	11BR30DIM/927	2700K	920	93	84	Yes	65W	0.7	120°	25,000	120V	Yes	✓ / N.A. / ✓
36695	11BR30DIM/930	3000K	920	93	84	Yes	65W	0.7	120°	25,000	120V	Yes	✓ / N.A. / ✓
36696	11BR30DIM/940	4000K	920	93	84	Yes	65W	0.7	120°	25,000	120V	Yes	✓ / N.A. / ✓
36697	11BR40DIM/927	2700K	950	93	86	Yes	75W	0.7	120°	25,000	120V	Yes	✓ / N.A. / ✓
36698	11BR40DIM/930	3000K	950	93	86	Yes	75W	0.7	120°	25,000	120V	Yes	✓ / N.A. / ✓
36699	11BR40DIM/940	4000K	950	93	86	Yes	75W	0.7	120°	25,000	120V	Yes	✓ / N.A. / ✓
36700	13BR40DIM/927	2700K	1,100	93	85	Yes	85W	0.7	120°	25,000	120V	Yes	✓ / N.A. / ✓
36701	13BR40DIM/930	3000K	1,100	93	85	Yes	85W	0.7	120°	25,000	120V	Yes	✓ / N.A. / ✓
36702	13BR40DIM/940	4000K	1,100	93	85	Yes	85W	0.7	120°	25,000	120V	Yes	✓ / N.A. / ✓



- Suitable to replace 45W, 65W, 75W, 85W incandescent
- Energy efficient and environmentally friendly
- Provides comfortable, diffused light
- Dimmable with forward and reverse phase controls

SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	ES	
98462	9BR30DIM/830	3000K	650	82	72	Yes	65W	120°	25,000	120V	Yes	✓	
98464	11BR40DIM/827	2700K	950	82	86	Yes	75W	120°	25,000	120V	Yes	✓	
98465	11BR40DIM/830	3000K	950	82	86	Yes	75W	120°	25,000	120V	Yes	✓	
98466	15.5BR40DIM/827	2700K	1,100	82	71	Yes	85W	120°	25,000	120V	No	✓	
98467	15.5BR40DIM/830	3000K	1,100	82	71	Yes	85W	120°	25,000	120V	No	✓	

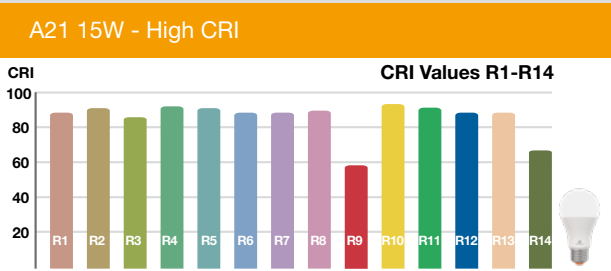

- Suitable to replace 40W, 60W, 75W, 100W incandescent lamps
- High CRI and R values (R9 57, R13 95)
- Suitable for use in totally enclosed fixtures

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	ES / JA8 / T20
36552	6A19DIM/927	2700K	480	92	90	Yes	40W	230°	25,000	120V	Yes	✓ / N.A. / ✓
36553	6A19DIM/930	3000K	480	92	90	Yes	40W	230°	25,000	120V	Yes	✓ / N.A. / ✓
98562	9A19/927/277V	2700K	800	92	89	No	60W	240°	25,000	120-277V	Yes	✓ / N.A. / ✓
98563	9A19/930/277V	3000K	820	92	91	No	60W	240°	25,000	120-277V	Yes	✓ / N.A. / ✓
98564	9A19/940/277V	4000K	860	92	96	No	60W	240°	25,000	120-277V	Yes	✓ / N.A. / ✓
36554	9A19DIM/927/R	2700K	800	92	89	Yes	60W	230°	25,000	120V	Yes	✓ / N.A. / ✓
36555	9A19DIM/930/R	3000K	820	92	91	Yes	60W	230°	25,000	120V	Yes	✓ / N.A. / ✓
36560	9A19DIM/935/R	3500K	840	92	93	Yes	60W	230°	25,000	120V	Yes	✓ / N.A. / ✓
36556	9A19DIM/940/R	4000K	860	92	96	Yes	60W	230°	25,000	120V	Yes	✓ / N.A. / ✓
36557	9A19DIM/950/R	5000K	860	92	96	Yes	60W	230°	25,000	120V	Yes	✓ / N.A. / ✓
36675	9A19DIM/927/GU24/RC	2700K	800	92	89	Yes	60W	230°	25,000	120V	Yes	✓ / N.A. / ✓
36676	9A19DIM/930/GU24/RC	3000K	820	92	91	Yes	60W	230°	25,000	120V	Yes	✓ / N.A. / ✓
36677	9A19DIM/940/GU24/RC	4000K	860	92	96	Yes	60W	230°	25,000	120V	Yes	✓ / N.A. / ✓
36678	9A19DIM/950/GU24/RC	5000K	860	92	96	Yes	60W	230°	25,000	120V	Yes	✓ / N.A. / ✓
98143	11A19DIM/940	4000K	1,200	92	109	Yes	75W	240°	25,000	120V	Yes	✓ / ✓ / ✓
36679	11A19DIM/927/R	2700K	1,100	92	100	Yes	75W	230°	25,000	120V	Yes	✓ / N.A. / ✓
36680	11A19DIM/930/R	3000K	1,150	92	105	Yes	75W	230°	25,000	120V	Yes	✓ / N.A. / ✓
36681	11A19DIM/940/R	4000K	1,200	92	109	Yes	75W	230°	25,000	120V	Yes	✓ / N.A. / ✓
36682	11A19DIM/950/R	5000K	1,200	92	109	Yes	75W	230°	25,000	120V	Yes	✓ / N.A. / ✓
98147	15A21DIM/927/N	2700K	1,600	92	107	Yes	100W	240°	25,000	120V	Yes	✓ / ✓ / ✓
98148	15A21DIM/930/N	3000K	1,650	92	110	Yes	100W	240°	25,000	120V	Yes	✓ / ✓ / ✓
98149	15A21DIM/940/N	4000K	1,700	92	113	Yes	100W	240°	25,000	120V	Yes	✓ / ✓ / ✓

- Suitable to replace 40W, 60W, 75W, 100W incandescent lamps
- Provides comfortable, diffused light
- Dimmable with forward and reverse phase controls



SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	ES
37082	5A19DIM/827/4PK	2700K	450	82	90	Yes	40W	230°	15,000	120V	Yes	✓
37083	5A19DIM/830/4PK	3000K	450	82	90	Yes	40W	230°	15,000	120V	Yes	✓
36548	9A19DIM/827/R	2700K	800	82	89	Yes	60W	230°	25,000	120V	Yes	✓
36549	9A19DIM/830/R	3000K	820	82	91	Yes	60W	230°	25,000	120V	Yes	✓
36559	9A19DIM/835/R	3500K	840	82	93	Yes	60W	230°	25,000	120V	Yes	✓
36550	9A19DIM/840/R	4000K	860	82	96	Yes	60W	230°	25,000	120V	Yes	✓
36551	9A19DIM/850/R	5000K	860	82	96	Yes	60W	230°	25,000	120V	Yes	✓
97909	9A19DIM/830/GU24/R	3000K	820	82	91	Yes	60W	240°	25,000	120V	Yes	✓
36861	9.5A19DIM/827/R	2700K	800	82	84	Yes	60W	230°	15,000	120V	Yes	✓
36862	9.5A19DIM/830/R	3000K	820	82	86	Yes	60W	230°	15,000	120V	Yes	✓
36863	9.5A19DIM/840/R	4000K	860	82	91	Yes	60W	230°	15,000	120V	Yes	✓
36864	9.5A19DIM/850/R	5000K	860	82	91	Yes	60W	230°	15,000	120V	Yes	✓
36615	13A19DIM/827	2700K	1,100	82	85	Yes	60W	230°	15,000	120V	Yes	✓
36616	13A19DIM/830	3000K	1,150	82	88	Yes	60W	230°	15,000	120V	Yes	✓
36617	13A19DIM/840	4000K	1,200	82	92	Yes	60W	230°	15,000	120V	Yes	✓
36618	13A19DIM/850	5000K	1,200	82	92	Yes	60W	230°	15,000	120V	Yes	✓
36671	15A19DIM/827	2700K	1,600	82	107	Yes	100W	230°	25,000	120V	Yes	✓
36672	15A19DIM/830	3000K	1,650	82	110	Yes	100W	230°	25,000	120V	Yes	✓
36673	15A19DIM/840	4000K	1,700	82	113	Yes	100W	230°	25,000	120V	Yes	✓
36674	15A19DIM/850	5000K	1,700	82	113	Yes	100W	230°	25,000	120V	Yes	✓
98150	15A21DIM/827/GU24	2700K	1,600	82	107	Yes	100W	240°	25,000	120V	Yes	✓

Illuminate In Style

Either installed into a light fixture or simply used alone, the deco large size filament series creates a pleasant glow for a vintage or modern atmosphere that illuminate in style.



G63
Amber
2000K
4.5W
300lm



G63
Clear
2100K
4.5W
300lm



G63
Smoky
4000K
4.5W
150lm



E53
Smoky Ombre
1800K
4.5W
110lm



A50
Amber
2000K
4.5W
300lm



A50
Clear
2100K
4.5W
300lm



A50
Smoky
4000K
4.5W
150lm



G40 / G25
Double Layer
2000K
4.5W
250lm



G40
Clear
2100K
4.5W
250lm



C35
Crystal Clear
2000K
6.5W
500lm



R32
Ribbed Clear
2000K
6.5W
500lm



T10
Amber
2000K
450lm



ST19
Amber
2000K
250lm



ST19
Clear
2100K
250lm



ST19
Smoky
4000K
150lm




E26
Golden

E26
Black

Features

- Installed into a light fixture or simply used alone
- Optional golden or black E26 pendant light kit
- Unique and abundant form factors
- Full glass construction
- Suitable for use in wet locations
- 330° omnidirectional beam angle
- 120V smooth dimming
- Dim to off
- Options for use in totally enclosed fixtures
- Industry leading lifetime of 25,000 hours
- Create a vintage or modern atmosphere

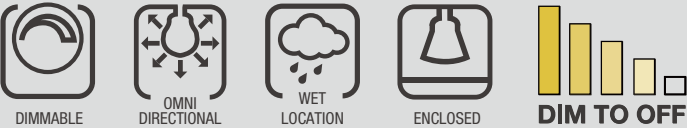

SPECIFICATIONS														
Product	Model	CCT	Shape	Finish	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	UL Location
37092	4.5FSST19DIM/821	2100K	ST19	Clear	250	82	56	Yes	40W	330°	25,000	120V	Enclosed	Wet
37093	4.5FSST19DIM/820/A	2000K	ST19	Amber	250	82	56	Yes	40W	330°	25,000	120V	Enclosed	Wet
37094	4.5FSST19DIM/840/S	4000K	ST19	Smoky	150	82	33	Yes	40W	330°	25,000	120V	Enclosed	Wet
37095	4.5FSG40DIM/821	2100K	G40	Clear	250	82	56	Yes	40W	330°	25,000	120V	Enclosed	Wet
37096	4.5FSA50DIM/821	2100K	A50	Clear	300	82	67	Yes	40W	330°	25,000	120V	Open	Wet
37097	4.5FSA50DIM/820/A	2000K	A50	Amber	300	82	67	Yes	40W	330°	25,000	120V	Open	Wet
37098	4.5FSA50DIM/840/S	4000K	A50	Smoky	150	82	33	Yes	40W	330°	25,000	120V	Open	Wet
37099	4.5FSG63DIM/821	2100K	G63	Clear	300	82	67	Yes	40W	330°	25,000	120V	Open	Wet
37100	4.5FSG63DIM/820/A	2000K	G63	Amber	300	82	67	Yes	40W	330°	25,000	120V	Open	Wet
37101	4.5FSG63DIM/840/S	4000K	G63	Smoky	150	82	33	Yes	40W	330°	25,000	120V	Open	Wet
37102	4.5FSE53DIM/818/GS	1800K	E53	Smoky Ombre	110	82	24	Yes	25W	170°	25,000	120V	Open	Wet
37103	4.5FSG40DIM/820/DL	2000K	G40	Double Layer	250	82	56	Yes	40W	330°	25,000	120V	Open	Wet
37104	6.5FC35DIM/920	2000K	C35	Clear	500	82	77	Yes	40W	330°	25,000	120V	Open	Wet
37105	6.5FR32DIM/920	2000K	R32	Clear	500	82	77	Yes	40W	330°	25,000	120V	Open	Wet
37106	6.5FST10DIM/820/A	2000K	T10	Amber	450	82	69	Yes	40W	330°	25,000	120V	Enclosed	Wet
37107	DECO/ACC/CD/B													
37108	DECO/ACC/CD/G													

VERSA FILAMENT LINE



Remarkably efficient. Greatly versatile.



- Provides an excellent option for energy savings
- Suitable for use in totally enclosed fixtures & wet locations
- Wider fixture operating temperature: -13°F to 113°F
- High CRI and R values (R9 50, R13 95)
- Smooth dimming with most forward and reverse phase controls

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	ES / JA8 / T20
36747	9FA19DIM/927/RC	2700K	820	92	91	Yes	60W	320°	15,000	120V	Yes	✓ / N.A. / ✓
36748	9FA19DIM/930	3000K	820	92	91	Yes	60W	320°	15,000	120V	Yes	✓ / N.A. / ✓
36749	9FA19DIM/940	4000K	850	92	94	Yes	60W	320°	15,000	120V	Yes	✓ / N.A. / ✓
36750	9FA19DIM/950	5000K	850	92	94	Yes	60W	320°	15,000	120V	Yes	✓ / N.A. / ✓
36751*	10FA19DIM/927	2700K	1,150	92	115	Yes	75W	320°	15,000	120V	Yes	✓ / ✓ / ✓
36752	10FA19DIM/930	3000K	1,150	92	115	Yes	75W	320°	15,000	120V	Yes	✓ / ✓ / ✓
36753	10FA19DIM/940	4000K	1,200	92	120	Yes	75W	320°	15,000	120V	Yes	✓ / ✓ / ✓
36754*	10FA19DIM/950	5000K	1,200	92	120	Yes	75W	320°	15,000	120V	Yes	✓ / ✓ / ✓
37056	2FB11DIM/927	2700K	200	92	100	Yes	25W	320°	25,000	120V	Yes	✓ / N.A. / ✓
37057	2FB11DIM/927/E26	2700K	200	92	100	Yes	25W	320°	25,000	120V	Yes	✓ / N.A. / ✓
37058	3.3FB11DIM/927/RC	2700K	300	92	91	Yes	40W	320°	25,000	120V	Yes	✓ / N.A. / ✓
37059	3.3FB11DIM/927/FR/RC	2700K	300	92	91	Yes	40W	320°	25,000	120V	Yes	✓ / ✓ / N.A.
37060	3.3FB11DIM/927/E26/RC	2700K	300	92	91	Yes	40W	320°	25,000	120V	Yes	✓ / ✓ / N.A.
37061	3.3FB11DIM/820/A	2000K	240	82	79	Yes	40W	320°	25,000	120V	Yes	N.A. / N.A. / N.A.
37063	5.5FB11DIM/927/RC	2700K	500	92	91	Yes	60W	320°	25,000	120V	Yes	✓ / ✓ / N.A.
37064	5.5FB11DIM/927/FR	2700K	500	92	91	Yes	60W	320°	25,000	120V	Yes	✓ / N.A. / ✓
37065	5.5FB11DIM/927/E26/RC	2700K	500	92	91	Yes	60W	320°	25,000	120V	Yes	✓ / N.A. / ✓

* MTO (Make To Order) codes

PREMIUM FILAMENT & DECO LINE



Suitable for All Decorative Applications



- Suitable for use in wet locations
- 320° omnidirectional beam angle
- High CRI and R values (R9 53, R13 93)
- Smooth dimming with most forward and reverse phase controls

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Finish	ES / T20
36075	3FT6DIM/820/A/R	2000K	110	82	37	Yes	25W	320°	15,000	120V	Amber	N.A. / N.A.
36076	3.5FT10DIM/820/A/R	2000K	250	82	71	Yes	25W	320°	15,000	120V	Amber	N.A. / N.A.
36077	1FS14/827/R	2700K	55	82	55	No	11W	320°	15,000	120V	Clear	N.A. / N.A.
36078	1FS14/820/A/R	2000K	35	82	35	No	11W	320°	15,000	120V	Amber	N.A. / N.A.
36080	5FA19DIM/927/FR/R	2700K	450	92	90	Yes	40W	320°	15,000	120V	Frosted	✓ / ✓
36082	9FA19DIM/927/R	2700K	810	92	90	Yes	60W	320°	15,000	120V	Clear	✓ / ✓
36083	9FA19DIM/927/FR/R	2700K	810	92	89	Yes	60W	320°	15,000	120V	Frosted	✓ / ✓
36084	7.5FA19DIM/820/A/R	2000K	600	82	80	Yes	60W	320°	15,000	120V	Amber	N.A. / N.A.
36085	7.5FA19DIM/827/SB/R	2700K	700	82	93	Yes	60W	320°	15,000	120V	Silver Bowl	N.A. / N.A.
36061	3.3FB11DIM/927/R	2700K	300	92	91	Yes	40W	320°	15,000	120V	Clear	✓ / ✓
36062	3.3FB11DIM/927/E26/R	2700K	300	92	91	Yes	40W	320°	15,000	120V	Clear	✓ / ✓
36066	3.5FBA11DIM/820/FT/A/R	2000K	240	82	69	Yes	40W	320°	15,000	120V	Amber	N.A. / N.A.
36067	3.8FG16.5DIM/927/R	2700K	350	92	91	Yes	40W	320°	15,000	120V	Clear	✓ / ✓
36068	3.8FG16.5DIM/927/E26/R	2700K	350	92	91	Yes	40W	320°	15,000	120V	Clear	✓ / ✓
36069	4FG16.5DIM/820/A/R	2000K	250	82	63	Yes	40W	320°	15,000	120V	Amber	N.A. / N.A.
36070	3.8FG25DIM/927/R	2700K	350	92	92	Yes	40W	320°	15,000	120V	Clear	✓ / ✓
36071	4FG25DIM/820/A/R	2000K	250	82	63	Yes	40W	320°	15,000	120V	Amber	N.A. / N.A.
36072	4.5FG25DIM/827/SB/R	2700K	400	82	89	Yes	40W	320°	15,000	120V	Silver Bowl	N.A. / N.A.
36073	5.5FG40DIM/927/R	2700K	500	92	91	Yes	60W	320°	15,000	120V	Clear	✓ / ✓
36074	4FST19DIM/820/A/R	2000K	300	82	75	Yes	40W	320°	15,000	120V	Amber	N.A. / N.A.

NOTES

Date: / /

NOTES


Date: / /



GREENCREATIVE

Your Partner for Professional Lighting Solutions

2023 Q4



Tel / Fax: (866) 774-5433

info@greencreative.com

www.greencreative.com



/ GREENCREATIVELED



/ GClightingLED



/ GREEN-CREATIVE



An ILLUMUS Brand

www.ILLUMUS.com