

3N1 SURFACE MOUNT DOWNLIGHT SERIES



FEATURES

- Surface mount downlight 5", 7", 9" and 12", from 700 lumens to 1,800 lumens
- Shallow fixture depth blends in to ceilings
- Select from 3000K/3500K/4000K CCT with SelectKelvin Technology
- Edge lighting technology with PMMA light guide eliminates lens yellowing
- 120V or 0-10V dimming options
- Working temperature: -4°F / -20°C - 95°F / 35°C
- Install in many applications with the Air-Tight, IC and Wet Location ratings
- Three mounting options from one fixture - Direct Ceiling, Recessed Housing & J-Box
- ETL Listed and Classified
- 90 CRI with 3-steps SDCM binning
- 50,000 hour lifetime
- 5 Year warranty



Closets



Bathrooms




Hallways



Kitchens



BENEFITS

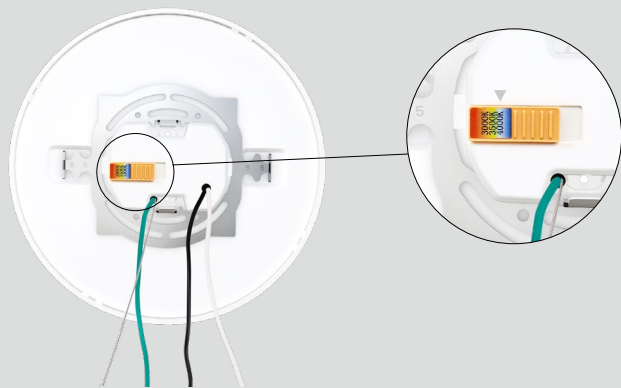

3 COLOR TEMPERATURES - 1 PRODUCT


Make your new construction, retrofit or remodel projects easier with the 3N1 downlight family of fixtures, featuring SelectKelvin Technology. Select the CCT before, during or after installation with just the flip of a switch and never worry about having the correct CCT for a project again.

3 INSTALLATION METHODS - 1 PRODUCT

The 3N1 5", 7", 9" and 12" all come standard with a surface mount bracket compatible with most 4" J-Box (provided by others).

In addition, the 5" 3N1 retrofits 4" recessed housings and the 7" and 9" 3N1 retrofit 5" and 6" recessed housings, with optional torsion springs (sold separately).

The 5", 7" and 9" 3N1 downlights, can also be used for remodel or new construction by direct mounting to the ceiling with the j-box accessory (sold separately).

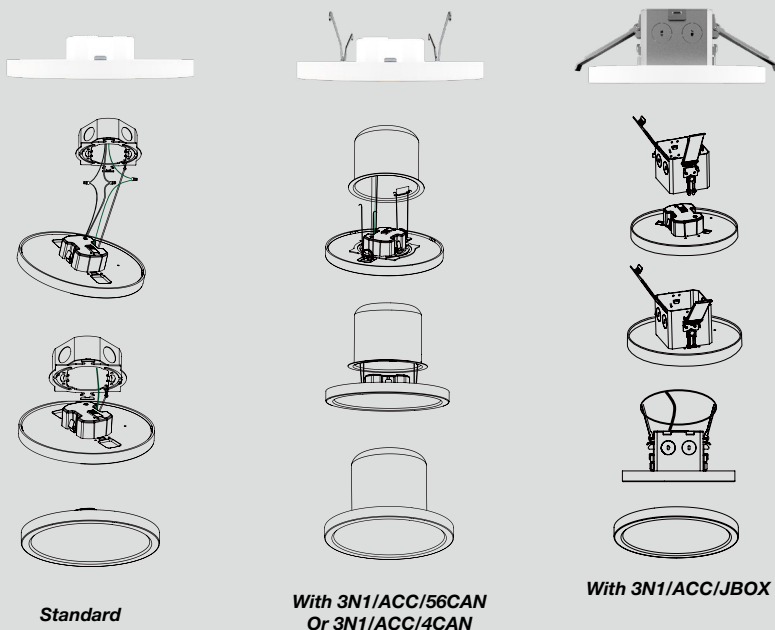

Field Selectable CCT with SelectKelvin Technology

Gasketed to provide Air-Tight and Wet Location Ratings



120V Forward and Reverse Phase or 120-277V 0-10V dimming options



Edge lighting technology featuring a PMMA light guide plate

<1" thickness from below the ceiling



90 CRI with 3-steps SDCM binning LEDs

Smooth polycarbonate lens for even light emitting surface with 110° beam angle.

ORDERING

| Series | Size | CRI | CCT | Dimming |
|--|--|---|---|--|
| <input checked="" type="checkbox"/> 3N1 3 IN 1 Downlight | <input type="checkbox"/> 5 5" 700lm | <input checked="" type="checkbox"/> 90 CRI 90 | <input checked="" type="checkbox"/> CCTS Selectable CCT 3000K / 3500K / 4000K | <input type="checkbox"/> DIM120V Forward & Reverse Phase Dimming, 120V |
| | <input type="checkbox"/> 7 7" 1000lm | | | <input type="checkbox"/> DIM010UNV 0-10V dimming, Universal 120-277V |
| | <input type="checkbox"/> 9 9" 1200lm | | | |
| | <input type="checkbox"/> 12 12" 1800lm | | | |

ACCESSORY ORDERING INFORMATION

| Product | Model | Picture | Description |
|---------|---------------|---|---|
| 35469 | 3N1/TRM/5/BL |  | 5" 3N1 - Black Trim |
| 35470 | 3N1/TRM/5/BZ |  | 5" 3N1 - Bronze Trim |
| 35471 | 3N1/TRM/5/BN |  | 5" 3N1 - Brushed Nickel Trim |
| 35472 | 3N1/TRM/7/BL |  | 7" 3N1 - Black Trim |
| 35473 | 3N1/TRM/7/BZ |  | 7" 3N1 - Bronze Trim |
| 35474 | 3N1/TRM/7/BN |  | 7" 3N1 - Brushed Nickel Trim |
| 35475 | 3N1/TRM/9/BL |  | 9" 3N1 - Black Trim |
| 35476 | 3N1/TRM/9/BZ |  | 9" 3N1 - Bronze Trim |
| 35477 | 3N1/TRM/9/BN |  | 9" 3N1 - Brushed Nickel Trim |
| 35478 | 3N1/ACC/4CAN |  | 3N1 - 4" Can Retrofit Accessory (for use with 5" 3N1) |
| 35479 | 3N1/ACC/56CAN |  | 3N1 - 5/6" Can Retrofit Accessory (for use with 7" and 9" 3N1) |
| 35480 | 3N1/ACC/JBOX |  | Direct Mount Accessory J-Box ¹ |
| 98003 | 23EMDRIVER |  | California Title 20 Compliant 23W Emergency LED Driver (Field Installation) |

¹ A 90° flex connector (provided by others) must be used when installing incoming power with MC cable to the knockouts on the j-box for the 5" 3N1.