

# HID LED 54W WALL PACK

PRO



Horizontal lamp supports included

54W REPLACES



175-250W  
HID


70% Energy Savings

- ⌚ Direct line voltage 120-277V - Not compatible with ballasts
- ⌚ Designed to replace traditional ED37 HID lamps
- ⌚ Compatible with EX39 & E39 sockets
- ⌚ 350° rotatable base
- ⌚ Available in 4000K & 5000K
- ⌚ Suitable for use in totally enclosed fixtures



## HID LED WALL PACK PRODUCT FEATURES


Suitable for Enclosed Fixtures

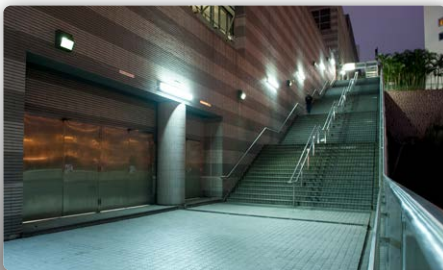

This HID LED lamp replaces a 175-250W HID and is suitable for use in totally enclosed fixtures. Its high lumen output and exceptional efficacy make it an ideal choice for outdoor wall pack applications.

### CoolSink Technology

The CoolSink passive cooling system allows air to flow freely through the lamp. This unique design uses an increased cooling surface area to reduce the operating temperature of the LED and power supply, thus resulting in longer lamp life and lumen maintenance.

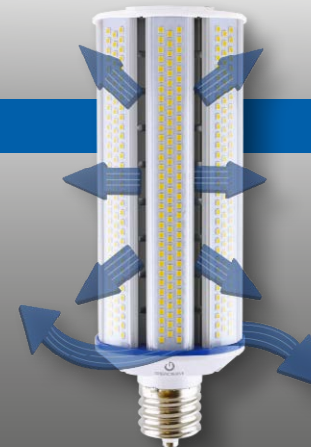

# HID LED 54W WALL PACK

## APPLICATIONS

### General Lighting & Security



### Loading Areas



### Walkways & Entryways



## SPECIFICATIONS

Product Model	98189 54HIDWP/840/277V/EX39	98190 54HIDWP/850/277V/EX39
Type	HID LED	HID LED
Base	EX39 (Compatible with E39)	EX39 (Compatible with E39)
Power (W)	54	54
Voltage - Frequency	120-277V	120-277V
Color Temp. (ANSI)	Cool White 4000K	Daylight 5000K
CRI (Ra) (typ.)	82	82
Bare Lamp Lumens (lm)	7800	7800
Bare Lamp Efficacy (LPW)	144	144
Beam Angle	120°	120°
Dimmable	No	No
Power Factor	0.9	0.9
Rated Lifetime - L70 (hrs.)	50,000	50,000
Temperature Rating	-4°F/-20°C - 95°F/35°C	-4°F/-20°C - 95°F/35°C
Dia. x MOL	3.62"x10.71" (92x272mm)	3.62"x10.71" (92x272mm)
Weight (lb. / g)	2.25lb. / 1020g	2.25lb. / 1020g

## HID EQUIVALENCE

GREEN CREATIVE HID LED		Metal Halide		Mercury Vapor		High Pressure Sodium	
Power	Lumens	Power	Mean Lumens	Power	Mean Lumens	Power	Mean Lumens
54W	7800	175W	10,800	250W	11,000	100W	8000

\* Suitable for use in totally enclosed fixtures

\*\* Suitable for damp locations. Not for use where directly exposed to weather or water

\*\*\* Suitable for use in horizontal applications