

PL H 6W BYP GU24 TITANIUM LED SERIES



PL:EDGE
SERIES


6W REPLACES



13W
CFL

60% Energy Savings


PRO

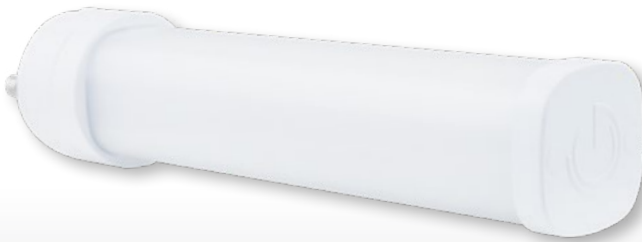

- ⌚ Built-in universal voltage driver - Bypass installation
- ⌚ Compatible with GU24 bases
- ⌚ Exceptional efficacy 93 LPW
- ⌚ Lasts 4 times longer than CFL
- ⌚ Horizontal installation, compact form factor fits most fixtures
- ⌚ Available in 3000K, 3500K & 4000K
- ⌚ Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)
Lamp ambient temperature: -4°F to 113°F (-20°C to 45°C)



50,000 H



UNIVERSAL



EFFICACY



WARRANTY



CRI (Ra)




SEMI DIRECTIONAL




PL PRODUCT FEATURES

BYPass Installation

This PL H lamp requires bypassing the ballast during installation and runs directly off line voltage to eliminate compatibility problems, incidental power loss, lifetime issues, and maintenance costs associated with ballasts.

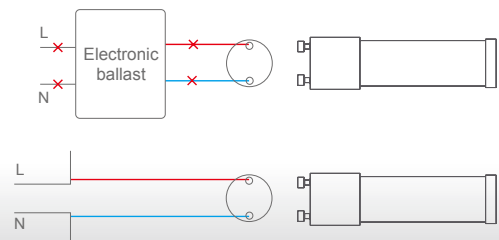


Adjustable Base

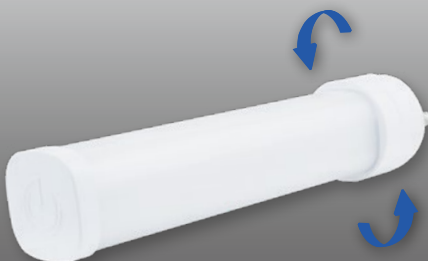


This PL H lamp features a base that can be rotated 310° to fit any socket configuration. After installation simply rotate the lamp to achieve maximum light output.

APPLICATIONS


Retail

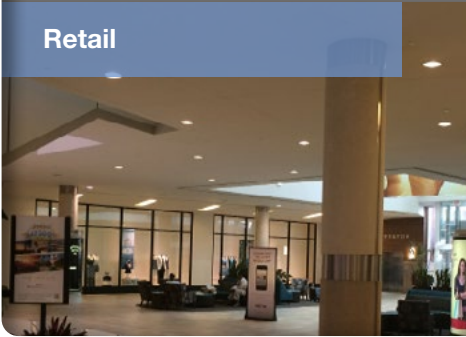


Hospitality

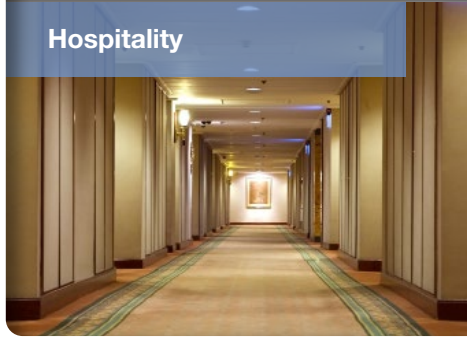

Office

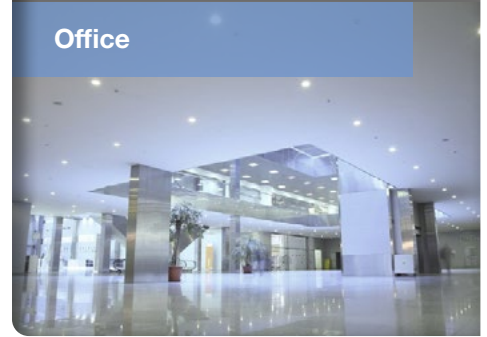

Base: GU24
Voltage: 120-277V
Dimmable: No
PF: 0.9
Lifetime: 50,000 hrs
Weight: 0.15lb / 68g

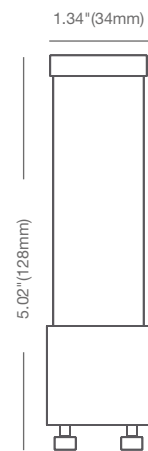

SPECIFICATIONS*

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
6PLH/830/BYP/GU24/R	57928	6	Warm White 3000K	82	550	92	110°
6PLH/835/BYP/GU24/R	57929	6	Neutral White 3500K	82	550	92	110°
6PLH/840/BYP/GU24/R	57930	6	Cool White 4000K	82	560	93	110°

* Suitable for damp locations. Not for use where directly exposed to weather or water

** Not intended for use in enclosed fixtures

*** Full installation guide and more details available on website