

PL H 6W BYP TITANIUM LED SERIES



PL:EDGE
SERIES

6W REPLACES




**13-18W
CFL**

60% Energy Savings

PRO




- ⌚ Built-in universal voltage driver - Bypass installation
- ⌚ Compatible with G24d, GX24d, G24q & GX24q bases
- ⌚ Exceptional efficacy 93 LPW
- ⌚ Lasts 4 times longer than CFL
- ⌚ Available in 3500K & 4000K CCT
- ⌚ Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)
Lamp ambient temperature: -4°F to 113°F (-20°C to 45°C)



PL PRODUCT FEATURES

BYPass Installation

This PL H lamp is not compatible with magnetic or electronic ballasts and requires bypassing the ballast during installation. The lamp runs directly off line voltage to eliminate compatibility problems, incidental power loss, lifetime issues, and maintenance costs associated with ballasts.

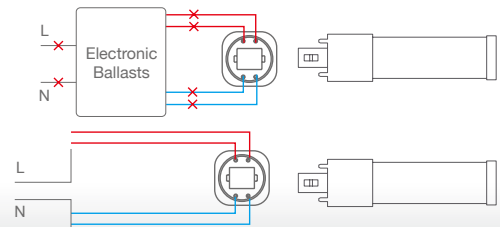

DESIGNED FOR HORIZONTAL APPLICATIONS



APPLICATIONS

Retail




Hospitality



Office



- Base:** G24d, GX24d, G24q & GX24q (2/4-pin CFL)
- Voltage:** 120-277V
- Dimmable:** No
- PF:** 0.9
- Lifetime:** 50,000 hrs
- Weight:** 0.15lb / 68g

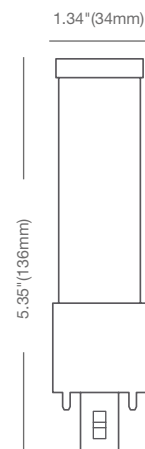

SPECIFICATIONS*

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
6PLH/835/BYP/R	57904	6	Neutral White 3500K	80	550	92	110°
6PLH/840/BYP/R	57905	6	Cool White 4000K	80	560	93	110°

* Suitable for damp locations. Not for use where directly exposed to weather or water

** Not intended for use in enclosed fixtures

*** Full installation guide and more details available on website