


# 4FT in the Box, 8FT in Use

**CCT and Power Select T8 8ft DEB (2-Piece)** 



## 4FT in the Box, 8FT in Use

Say goodbye to the hassle of transporting and installing cumbersome 8ft tubes. Split in 2 connectable parts, with five selectable CCTs, three selectable power levels and swappable lamp sockets, combined with powerful 5500lm light output, the upgraded 8ft LED tube provides more convenient and superior alternative for retrofitting traditional 8ft T8 and T12 fluorescent lamps.

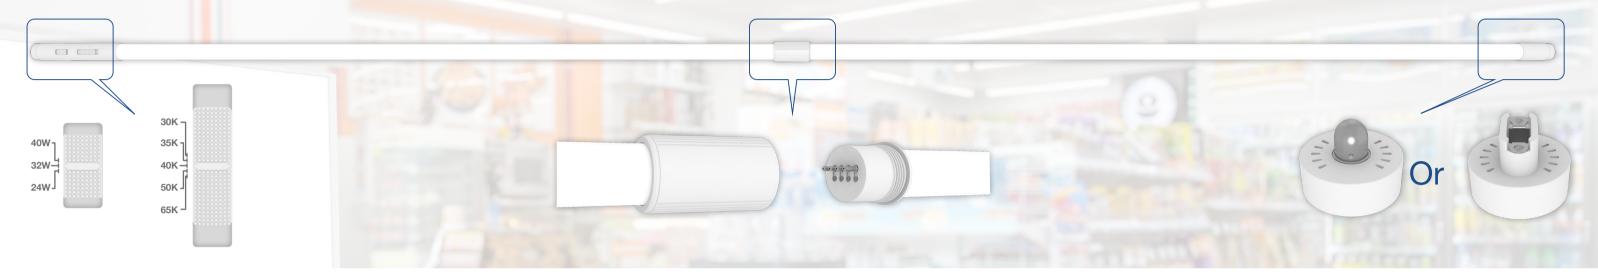

#### **Designed in 2 Connectable Parts**

Engineered in two separate connectable 4ft parts, the LED tube can easily connect into one 8ft tube in the field. This innovative design brings significant savings on shipping and storage cost as well as reducing the risk of breakage during transit.



### **5 Selectable Color Temperatures and 3 Selectable Power Levels**

The integral SelectKelvin switch allows for five selectable light colors in the field from 3000K, 3500K, 4000K, 5000K and 6500K. Whether you are seeking warm light for a cozy and relaxing atmosphere or cool light for a more energetic and productive environment, the SelectKelvin switch has you covered with only one single product.

The integral SelectDrive switch allows for three selectable power levels in 24W, 32W and 40W, catering to your specific needs for different lighting design and energy savings requirements in the project.



3000K


3500K

WARM WHITE LIGHT NEUTRAL WHITE LIGHT COOL WHITE LIGHT





DAY LIGHT



Select Drive

Select Kelvin

6500K COOL DAY LIGHT



Lamp bases are conveniently swappable between Fa8 and R17d, with Fa8 single-pin bases pre-assembled as standard, and R17d recessed double-contact bases supplied additionally, giving you the freedom to effortlessly adapt to any existing lamp holders in the field.



Fa8 Included and Pre-assembled

**R17d** Included and Field-swappable

Select Drive

#### **Powerful and Robust**

The 8ft LED tube delivers powerful 5,500lm light output with great efficacy up to 138 LPW. PET coated glass improves resistance to breakage. Suitable for double ended installation in bypass mode, the tube is featured with L70 rated lifetime of 50,000 hours, guaranteed with standard 5-year warranty with optional 10-year warranty available.





















## **Your Partner for Professional Lighting Solutions**

