

Project Name:	Type:
Part Number:	Date:

DECO LARGE FILAMENT FAMILY

FEATURES

- Install into a light fixture or simply use alone
- Create a vintage or modern atmosphere with clear, amber or smoky finishes
- Designed for decorative residential, retail and hospitality applications
- Pair one of our Large Decorative Filament Lamps with our Socket Pendant
- in black or golden that can be mounted on a junction box and you have the
- perfect solution for any decorative space
- Suitable to replace 25W or 40W incandescent lamps
- Available in 1800K, 2000K, 2100K, 3000K and 4000K color temperatures
- Dim to off
- Full glass construction
- 330° omnidirectional beam angle
- Smooth dimming with most forward and reverse phase controls*
- Suitable for use in totally enclosed fixtures
- Suitable for use in wet locations **
- Fixture operating temperature: -13°F to 95°F (-25°C to 35°C)
- Lamp ambient temperature: -13°F to 113°F (-25°C to 45°C)
- Industry leading lifetime (L70): 25,000hrs
- 3-year limited warranty ***



DIGITAL NAVIGATION Explore the spec sheet through the links below

[SPECIFICATIONS](#)
[DIMENSION & WEIGHT](#)
[LOGISTIC INFORMATION](#)



SPECIFICATIONS

LAMPS


Product	Model	Equiv.	Wattage (W)	CCT	Lumens	Efficacy (LPW)	Input Voltage	CRI	Shape	Dim.*	Finish	UL Location	Fixture Rating	Power Factor
37092	4.5FSST19DIM/821	40W	4.5	2100K	250	56	120V	82	ST19	Yes	Clear	Wet	Enclosed	≥0.7
38324	4.5FSST19DIM/830	40W	4.5	3000K	400	89	120V	82	ST19	Yes	Clear	Wet	Enclosed	≥0.7
37093	4.5FSST19DIM/820/A	40W	4.5	2000K	250	56	120V	82	ST19	Yes	Amber	Wet	Enclosed	≥0.7
37094	4.5FSST19DIM/840/S	40W	4.5	4000K	150	33	120V	82	ST19	Yes	Smoky	Wet	Enclosed	≥0.7
37095	4.5FSG40DIM/821	40W	4.5	2100K	250	56	120V	82	G40	Yes	Clear	Wet	Enclosed	≥0.7
37096	4.5FSA50DIM/821	40W	4.5	2100K	300	67	120V	82	A50	Yes	Clear	Wet	Open	≥0.7
37097	4.5FSA50DIM/820/A	40W	4.5	2000K	300	67	120V	82	A50	Yes	Amber	Wet	Open	≥0.7
37098	4.5FSA50DIM/840/S	40W	4.5	4000K	150	33	120V	82	A50	Yes	Smoky	Wet	Open	≥0.7
37099	4.5FSG63DIM/821	40W	4.5	2100K	300	67	120V	82	G63	Yes	Clear	Wet	Open	≥0.7
37100	4.5FSG63DIM/820/A	40W	4.5	2000K	300	67	120V	82	G63	Yes	Amber	Wet	Open	≥0.7
37101	4.5FSG63DIM/840/S	40W	4.5	4000K	150	33	120V	82	G63	Yes	Smoky	Wet	Open	≥0.7
37102	4.5FSE53DIM/818/GS	25W	4.5	1800K	110	24	120V	82	E53	Yes	Smoky Ombre	Wet	Open	≥0.7
37103	4.5FSG40DIM/820/DL	40W	4.5	2000K	250	56	120V	82	G40	Yes	Double Layer	Wet	Open	≥0.7
37104	6.5FC35DIM/920	40W	6.5	2000K	500	77	120V	92	C35	Yes	Clear	Wet	Open	≥0.7

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.

DECO LARGE FILAMENT FAMILY

SPECIFICATIONS

PENDANT LIGHT KIT

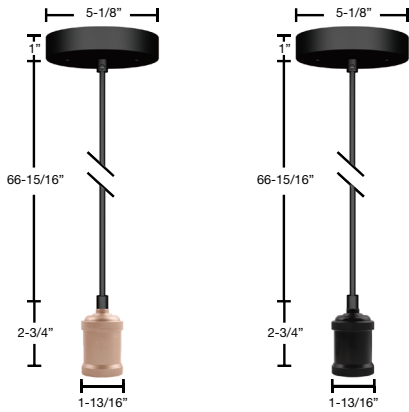

Product	Model	Input Voltage	Socket Finish	UL Location	Socket Base	ETL Listed
37107	DECO/ACC/CD/B	120V	Black	Dry	E26	√
37108	DECO/ACC/CD/G	120V	Golden	Dry	E26	√


FOOTNOTES:

* This lamp might not be compatible with all dimmers. Please visit www.greencreative.com for compatibility information.

** Products suitable for use in wet locations exclude Pendant Light Kits (37107 & 37108). For Pendant Light Kit E26 Sockets, they are suitable for use in dry locations only.

*** Please visit www.greencreative.com for Limited Warranty terms.

DIMENSION & WEIGHT

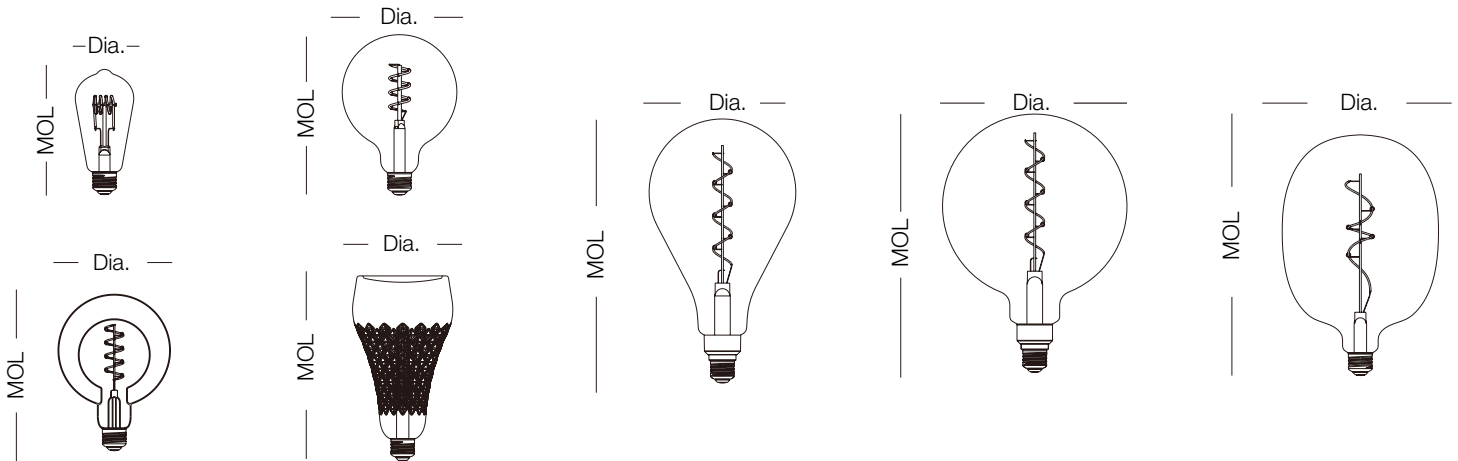

Model	Base	MOL	Dia.	Weight
4.5FSST19DIM/821	E26	5-3/8"	2-1/2"	0.09 lb
4.5FSST19DIM/830	E26			
4.5FSST19DIM/820/A	E26			
4.5FSST19DIM/840/S	E26			
4.5FSG40DIM/821	E26	6-7/8"	4-15/16"	0.19 lb
4.5FSA50DIM/821	E26	11-5/16"	6-5/16"	0.53 lb
4.5FSA50DIM/820/A	E26			
4.5FSA50DIM/840/S	E26			
4.5FSG63DIM/821	E26			
4.5FSG63DIM/820/A	E26	11-1/16"	7-7/8"	0.66 lb
4.5FSG63DIM/840/S	E26			
4.5FSE53DIM/818/GS	E26	10-5/16"	6-11/16"	0.54 lb
4.5FSG40DIM/820/DL	E26	6-13/16"	4-7/8"	0.36 lb
6.5FC35DIM/920	E26	8-1/16"	4-5/16"	0.38 lb

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.



DECO LARGE FILAMENT FAMILY

LOGISTIC INFORMATION

Model	Master Carton			Shipping Carton		
	Case Qty	Case Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
4.5FSST19DIM/821	6PCS	8-9/16" x 5-13/16" x 6-7/16"	1.11lb	24PCS	18" x 12-5/8" x 7-3/8"	5.34lb
4.5FSST19DIM/830	PCS6	8-9/16" x 5-13/16" x 6-7/16"	1.11lb	24PCS	18" x 12-5/8" x 7-3/8"	5.34lb
4.5FSST19DIM/820/A	6PCS	8-9/16" x 5-13/16" x 6-7/16"	1.11lb	24PCS	18" x 12-5/8" x 7-3/8"	5.34lb
4.5FSST19DIM/840/S	6PCS	8-9/16" x 5-13/16" x 6-7/16"	1.11lb	24PCS	18" x 12-5/8" x 7-3/8"	5.34lb
4.5FSG40DIM/821	6PCS	15-15/16" x 11" x 8-1/16"	2.98lb	12PCS	16-9/16" x 11-5/8" x 16-15/16"	7.05lb
4.5FSA50DIM/821	NA	NA	NA	2PCS	15-3/8" x 9-1/16" x 13-3/4"	3.26lb
4.5FSA50DIM/820/A	NA	NA	NA	2PCS	15-3/8" x 9-1/16" x 13-3/4"	3.26lb
4.5FSA50DIM/840/S	NA	NA	NA	2PCS	15-3/8" x 9-1/16" x 13-3/4"	3.26lb
4.5FSG63DIM/821	NA	NA	NA	2PCS	19-11/16" x 11-1/4" x 13-11/16"	4.3lb
4.5FSG63DIM/820/A	NA	NA	NA	2PCS	19-11/16" x 11-1/4" x 13-11/16"	4.3lb
4.5FSG63DIM/840/S	NA	NA	NA	2PCS	19-11/16" x 11-1/4" x 13-11/16"	4.3lb
4.5FSE53DIM/818/GS	NA	NA	NA	2PCS	17-9/16" x 10" x 12-3/16"	2.2lb
4.5FSG40DIM/820/DL	6PCS	15-15/16" x 11" x 8-1/16"	3.53lb	12PCS	16-9/16" x 11-5/8" x 16-15/16"	8.16lb
6.5FC35DIM/920	6PCS	14-3/4" x 9-7/8" x 9-1/4"	3.81lb	12PCS	20-3/8" x 15-1/8" x 9-7/8"	8.91lb
DECO/ACC/CD/B	NA	NA	NA	20PCS	21-5/8" x 8-7/8" x 9-1/2"	14.33lb
DECO/ACC/CD/G	NA	NA	NA	20PCS	21-5/8" x 8-7/8" x 9-1/2"	14.33lb

Where xxx means 824-965 which indicates CRI and color temperature