

Project Name:	Type:
Part Number:	Date:



# MR11

## FEATURES

- Suitable to replace 20W Halogen MR11 lamps
- Compatible with most low-voltage electronic transformers\*
- Compact size 1:1 halogen form factor
- Flood beam angles
- Suitable for use in totally enclosed fixtures
- Suitable for use in damp location
- Fixture operating temperature: -13°F to 95°F (-25°C to 35°C)  
Lamp ambient temperature: -13°F to 113°F (-25°C to 45°C)
- Rated Lifetime (L70): 25,000hrs
- 3 year limited warranty\*\*



012224




## SPECIFICATIONS

Product	Model	Equiv.	Wattage (W)	CCT	Lumens	Efficacy (LPW)	Input Voltage	Beam Angle	CBCP (cd)	CRI	Dim.	Power Factor	Base	Fixture Rating	T20
35790	2.5MR11/827FL35	20W	2.5	2700K	200	80	12V	FL 35°	400	82	No	0.5	GU4	Enclosed	√
35791	2.5MR11/840FL35	20W	2.5	4000K	200	80	12V	FL 35°	400	82	No	0.5	GU4	Enclosed	√

\*This lamp might not be compatible with all low-voltage transformers. Please visit [www.greencreative.com](http://www.greencreative.com) for compatibility information.  
\*\*Please visit [www.greencreative.com](http://www.greencreative.com) for Limited Warranty terms.

## DIMENSIONS & WEIGHT





Model	Base	MOL	Dia.	Weight
2.5MR11/xxxxxyyyy	GU4	1-1/2"	1-3/8"	0.04lb

## ORDERING INFORMATION

Product Series	Master Carton			Shipping Carton		
	Case QTY	Case Dimensions (LxWxH)	Case Weight	Case QTY	Case Dimensions (LxWxH)	Case Weight
2.5MR11/xxxxxyyyy	12PCS	4-11/16" x 3-1/8" x 4-3/8"	0.75 lb	48PCS	10-1/4" x 7-3/16" x 5-5/16"	3.17 lb

Where xxx means 824-965 which indicates CRI and color temperature  
Where yyyy means beam angle

## ILLUMINANCE & CANDELA DISTRIBUTION

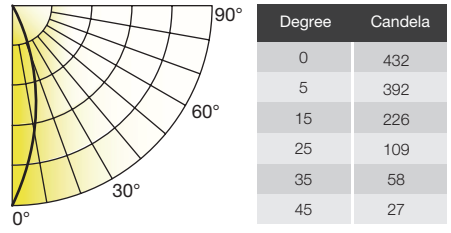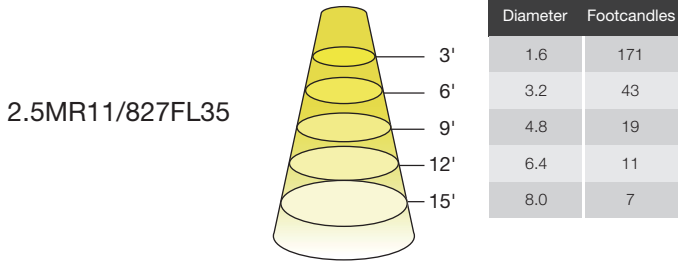

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice. For other CCT use the following multiplier: 3000K 1.02