

Project Name:	Type:
Part Number:	Date:



PAR38 25W HO 277V

FEATURES

- Replaces 250W Halogen & 70W CMH
- Direct line voltage 120-277V - Not compatible with ballasts
- High 10,000 candela output
- Powerful light output of 2,500 lumens
- Exceptional efficacy 100 LPW in Warm White
- Exceptional color rendering CRI 92
- Even beam distribution
- Suitable for damp locations, not suitable for use in totally enclosed fixtures
- Fixture Operating Temperature: -4°F to 95°F (-20°C to 35°C)
- Lamp Ambient Temperature: -4°F to 113°F (-20°C to 45°C)
- Rated Lifetime (L70): 50,000hrs
- 5 year limited warranty



DIGITAL NAVIGATION


Explore the spec sheet through the links below

[PHOTOMETRY](#) [LOGISTIC INFORMATION](#)

SPECIFICATIONS

Product	Model	Wattage (W)	CCT	Lumens	Efficacy (LPW)	Input Voltage	Beam Angle	CRI	Dim.	Base	CBCP (cd)	Power Factor	T20	DOE
98210	25PAR38HO/930NF25/277V	25	3000K	2,500	100	120-277V	NF 25°	92	No	E26	10,000	≥0.9	✓	✓
98212	25PAR38HO/940NF25/277V	25	4000K	2,500	100	120-277V	NF 25°	92	No	E26	10,000	≥0.9	✓	✓
98213	25PAR38HO/940FL40/277V	25	4000K	2,500	100	120-277V	FL 40°	92	No	E26	4,800	≥0.9	✓	✓

DIMENSION & WEIGHT



Model	Base	MOL	Dia.	Weight
25PAR38HO/xxxxyy/277V	E26	5-1/8"	4-3/4"	1.17lb


Where xxx means 824-965 which indicates CRI and color temperature
Where yyyy means beam angle




PAR38 25W HO 277V

PHOTOMETRY

25PAR38HO/930NF25/277V

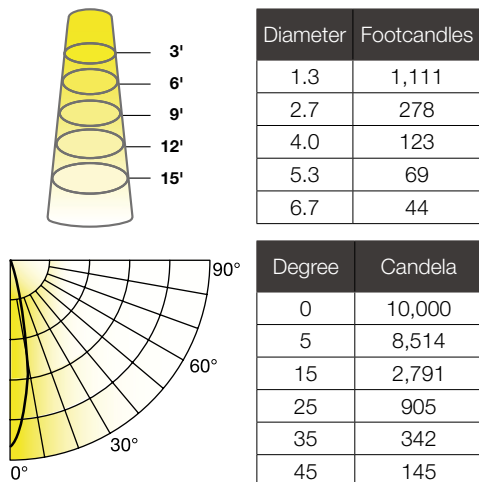

25PAR38HO/930FL40/277V

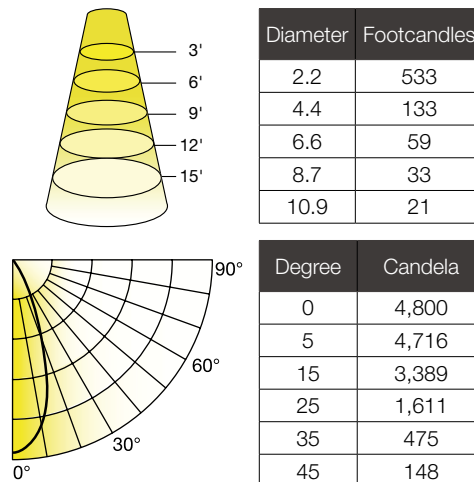

LOGISTIC INFORMATION

Model	Master Carton			Shipping Carton		
	Case Qty	Case Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
25PAR38HO/xxxxyy/277V	N.A.	N.A.	N.A.	6pcs	15-3/8" x 10-7/8" x 6-13/16"	8.82lb

Where xxx means 824-965 which indicates CRI and color temperature
Where yyyy means beam angle