


| | |
|---------------|-------|
| Project Name: | Type: |
| Part Number: | Date: |

CCT SELECT DIRECT PL

FEATURES

- Plug & Play – Easy to install
- Replaces G24q & GX24q (4-pin) 26W CFL lamps
- Compatible with most electronic ballasts (120-277V)
- SelectKelvin technology - field selectable color temperature in 3000K, 3500K, and 4000K
- 0-10V dimmable (ballast dependent)*
- Available in Horizontal & Vertical installation design
- 310° rotatable base allows light to be directed as needed and maximize performance in fixture (Horizontal installation models)
- Exceptional high efficacy up to 124 LPW
- Shatter-resistant plastic construction for durable protection
- Suitable for damp locations
- UL Listed
- Lamp ambient temperature: -4°F to 113°F (-20°C to 45°C)
- Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)
- Rated lifetime (L70): 50,000hrs
- 5 year limited warranty** / 10 year available (see EXTENDED WARRANTIES table for information)
- NSF (National Sanitation Foundation) certified for Food Zone (Non-Contact), Splash, and Non-Food Zones


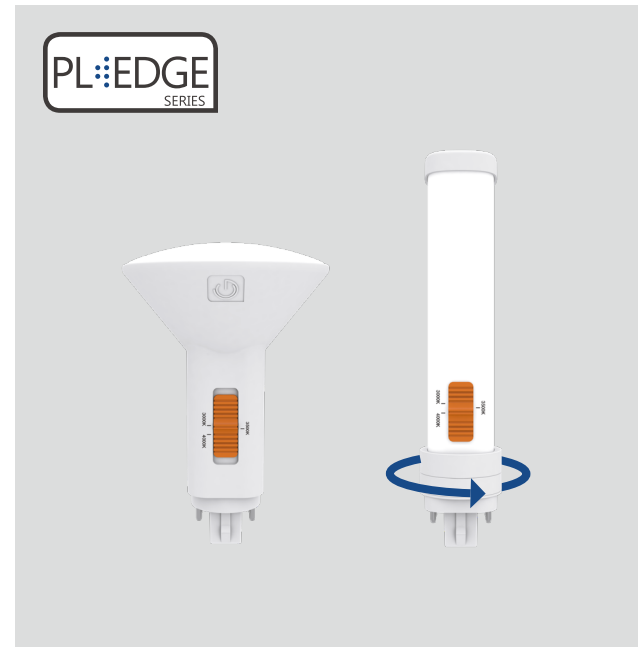


DIGITAL NAVIGATION

Explore the spec sheet through the links below

| | |
|--|---|
| BALLAST PERFORMANCE | DIMENSION & WEIGHT |
| MINIMUM COMPARTMENT DIMENSIONS | LOGISTIC INFORMATION |
| EXTENDED WARRANTIES | CERTIFICATION INFORMATION |

FOCUS FEATURE

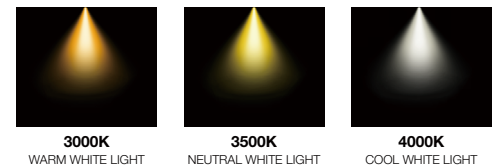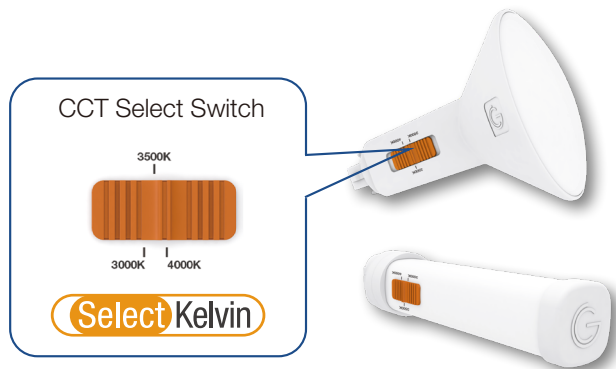

| SPECIFICATIONS | | | | | | | | | | | | | | | |
|----------------|------------------|--------|---------------|-------------|-------|--------|----------------|-----|--------------|------|------------|-------|----------------|-----|-----|
| Product | Model | Equiv. | Input Voltage | Wattage (W) | CCT | Lumens | Efficacy (LPW) | CRI | Power Factor | THD | Beam Angle | Dim.* | Fixture Rating | DLC | DOE |
| 37086 | 8.5PLH/8CCTS/DIR | 26W | 120-277V | 8.5 | 3000K | 1,000 | 118 | 82 | 0.9 | <20% | 110° | Yes | Non-Enclosed | ✓ | ✓ |
| | | | | | 3500K | 1,000 | 118 | | | | | | | | |
| | | | | | 4000K | 1,050 | 124 | | | | | | | | |
| 37087 | 9.5PLV/8CCTS/DIR | 26W | 120-277V | 9.5 | 3000K | 1,100 | 116 | 82 | 0.9 | <20% | 120° | Yes | Non-Enclosed | ✓ | ✓ |
| | | | | | 3500K | 1,150 | 121 | | | | | | | | |
| | | | | | 4000K | 1,150 | 121 | | | | | | | | |

FOOTNOTES:
 * Ballast Dependent. Please refer to www.greencreative.com for full ballast and dimmer compatibility list.
 ** Please visit www.greencreative.com for Limited Warranty terms.


Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.

CCT SELECT DIRECT PL

BALLAST PERFORMANCE

| Model | Ballast Type | Bare Lamp Wattage | System Wattage | 3000K Lumens | 3500K Lumens | 4000K Lumens |
|------------------|--------------|-------------------|----------------|--------------|--------------|--------------|
| 8.5PLH/8CCTS/DIR | 18W | 5.5 | 8.5 | 760 | 760 | 800 |
| | 26W | 8.5 | 11 | 1,000 | 1,000 | 1,050 |
| | 42W | 10 | 13 | 1,100 | 1,100 | 1,150 |
| 9.5PLV/8CCTS/DIR | 18W | 6.5 | 9 | 850 | 880 | 880 |
| | 26W | 9.5 | 12 | 1,100 | 1,150 | 1,150 |
| | 42W | 11.5 | 14.5 | 1,200 | 1,250 | 1,250 |



DIMENSION & WEIGHT

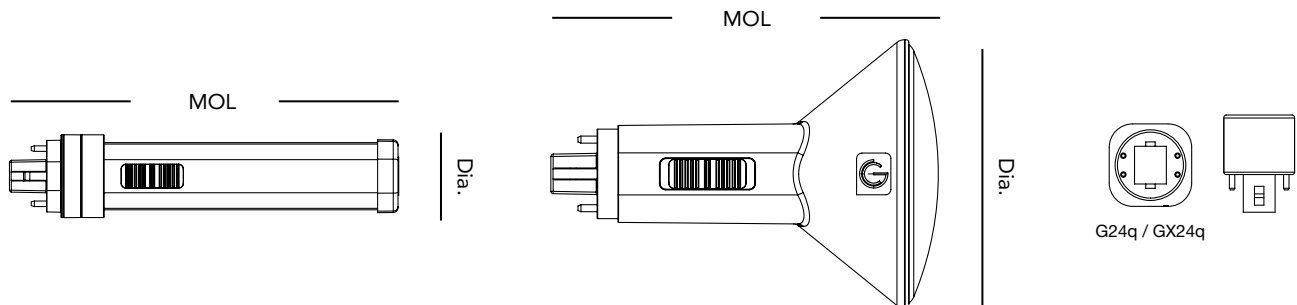

| Model | Compatible Base | MOL | Dia. | Weight |
|------------------|-----------------|--------|---------|---------|
| 8.5PLH/8CCTS/DIR | G24q & GX24q | 6-3/8" | 1-3/8" | 0.16 lb |
| 9.5PLV/8CCTS/DIR | | 5-1/8" | 3-9/16" | 0.22 lb |

MINIMUM COMPARTMENT DIMENSIONS

Note – the base of this lamp is 1-3/8" by 1-3/8" and the opening in the reflector should be a minimum of 1-3/8" by 1-3/8" to insure a proper fit. For non-enclosed rated applications the minimum compartment must follow the below guidelines.

| | | | |
|---|-----------------------------|----------|------------------|
| Non-enclosed Fixture Horizontal Installation  | Model Number | | 8.5PLH/8CCTS/DIR |
| | Lamp Compartment Dimensions | Diameter | 6-1/8" |
| | | Height | 4-3/4" |
| | Maximum Lamps in Luminaire | | 2 |
| Non-enclosed Fixture Vertical Installation  | Model Number | | 9.5PLV/8CCTS/DIR |
| | Lamp Compartment Dimensions | Diameter | 6-5/16" |
| | | Height | 9-1/16" |
| | Maximum Lamps in Luminaire | | 1 |

Product warranty is defined based on the condition of above minimum compartment size, maximum lamps in glass/metal luminaire.

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.



CCT SELECT DIRECT PL

LOGISTIC INFORMATION

| Model | Master Carton | | | Shipping Carton | | |
|------------------|---------------|---------------------------|-------------|-----------------|--------------------------------|-------------|
| | Case Qty | Case Dimensions (LxWxH) | Case Weight | Case Qty | Case Dimensions (LxWxH) | Case Weight |
| 8.5PLH/8CCTS/DIR | 6PCS | 6-3/4" x 4-5/8" x 3-1/4" | 1.21 lb | 24PCS | 13-7/8" x 9-15/16" x 4-3/4" | 5.29 lb |
| 9.5PLV/8CCTS/DIR | 6PCS | 11-1/4" x 7-1/2" x 5-1/2" | 2.2 lb | 24PCS | 30-11/16" x 12-1/4" x 6-15/16" | 10.14 lb |

EXTENDED WARRANTIES***

| Model | Description |
|---------------------------------|---------------------------------------|
| 8.5PLH/8CCTS/DIR/10YEARWARRANTY | 10 Year warranty for 8.5PLH/8CCTS/DIR |
| 9.5PLV/8CCTS/DIR/10YEARWARRANTY | 10 Year warranty for 9.5PLV/8CCTS/DIR |

FOOTNOTES:

*** Warranty based on a maximum of 4,368 annual operating hours (per year for ten years) and exposure to a maximum ambient temperature of 80°F / 27°C.

CERTIFICATION INFORMATION

| Product | Model | DLC ID |
|---------|------------------|----------|
| 37086 | 8.5PLH/8CCTS/DIR | S-YMB1WT |
| 37087 | 9.5PLV/8CCTS/DIR | S-8GTA4S |