


Project Name:	Type:
Part Number:	Date:

# CCT SELECT HYBRID PL

## FEATURES

- Replaces 26W CFL lamps
- DIrect or BYPass installation
- DIrect installation\* - Compatible with magnetic ballast (G24d/GX24d)
- BYPass installation - Work off line voltage (G24d/GX24d/G24q/GX24q)
- SelectKelvin technology - field selectable color temperature in 2700K, 3000K, 3500K, and 4000K
- Available in Horizontal & Vertical installation design
- 310° rotatable base allows light to be directed as needed and maximize performance in fixture (Horizontal installation models)
- Exceptional high efficacy up to 138 LPW
- Shatter-resistant plastic construction for durable protection
- Suitable for damp locations
- UL Listed and UL Classified
- Lamp ambient temperature: -4°F to 113°F (-20°C to 45°C)
- Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)
- Rated lifetime (L70): 50,000hrs
- 5 year limited warranty\*\* / 10 year available (see EXTENDED WARRANTIES table for information)
- NSF (National Sanitation Foundation) certified for Food Zone (Non-Contact), Splash, and Non-Food Zones

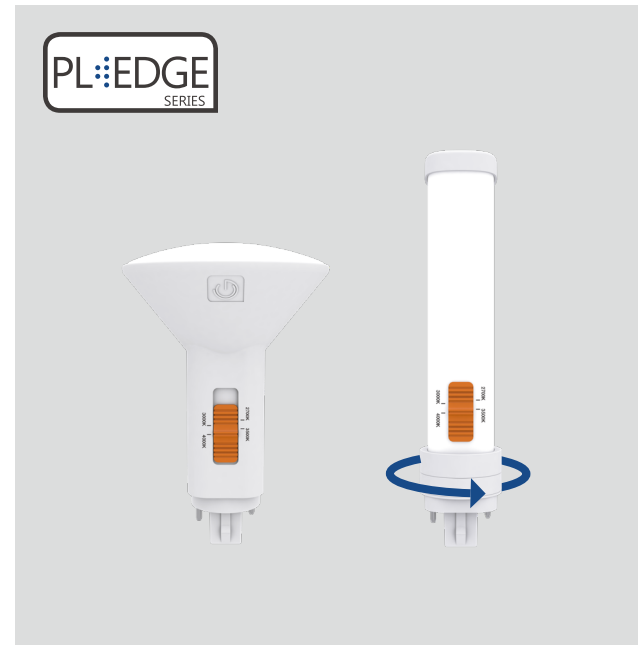



## DIGITAL NAVIGATION

Explore the spec sheet through the links below

- |  |  |
|--|--|
| <a href="#">DIMENSION &amp; WEIGHT</a> | <a href="#">MINIMUM COMPARTMENT DIMENSIONS</a> |
| <a href="#">INSTALLATION</a>           | <a href="#">ACCESSORY ORDERING INFORMATION</a> |
| <a href="#">LOGISTIC INFORMATION</a>   | <a href="#">EXTENDED WARRANTIES</a>            |



## FOCUS FEATURE

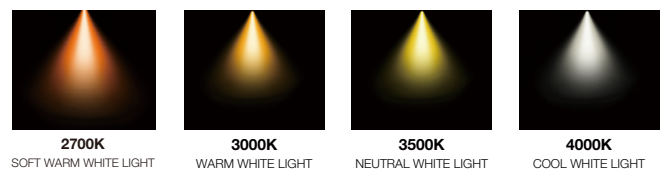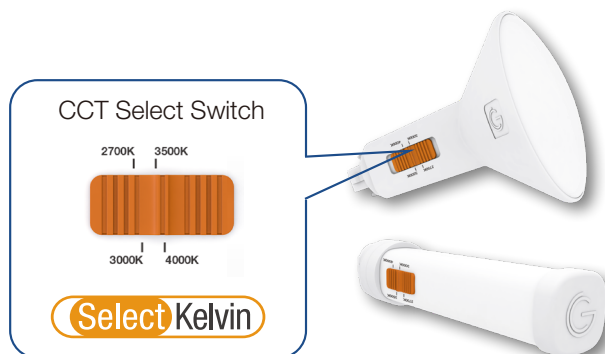

## SPECIFICATIONS

Product	Model	Equiv.	Input Voltage	Wattage (W)	CCT	Lumens	Efficacy (LPW)	CRI	Power Factor	THD	Beam Angle	Dim.	Fixture Rating	DOE
37084	8PLH/8CCTS/HYBM	26W	120-277V	8	2700K	870	109	82	0.9	<20%	110°	No	Non-Enclosed	✓
					3000K	920	115							
					3500K	1,000	125							
					4000K	1,000	125							
37085	8PLV/8CCTS/HYBM	26W	120-277V	8	2700K	1,000	125	82	0.9	<20%	120°	No	Non-Enclosed	✓
					3000K	1,050	131							
					3500K	1,100	138							
					4000K	1,100	138							

FOOTNOTES: Factory setting at 4000K CCT.


\* Ballast Dependent. Please refer to [www.greencreative.com](http://www.greencreative.com) for full ballast and dimmer compatibility list.

\*\* Please visit [www.greencreative.com](http://www.greencreative.com) for Limited Warranty terms.

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.

# CCT SELECT HYBRID PL



## DIMENSION & WEIGHT

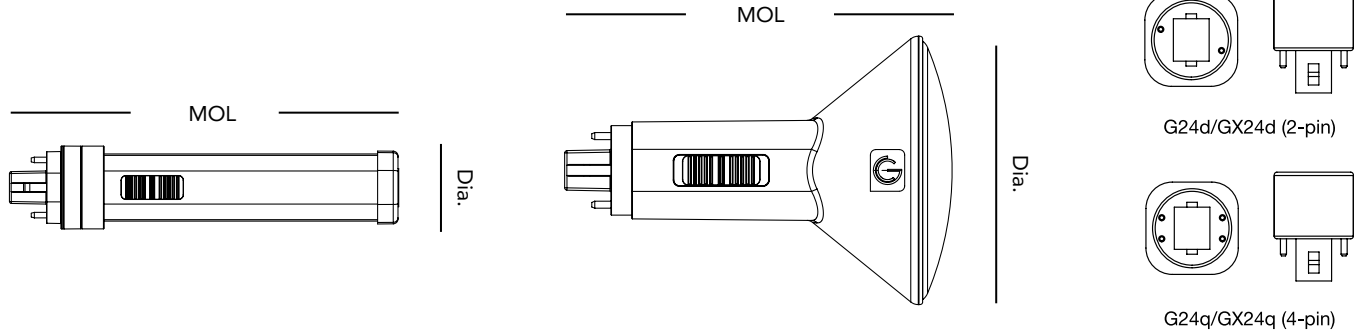

Model	Compatible Base	MOL	Dia.	Weight
8PLH/8CCTS/HYBM	G24d, GX24d, G24q & GX24q	6-3/8"	1-3/8"	0.16 lb
8PLV/8CCTS/HYBM		5-1/8"	3-9/16"	0.22 lb

## MINIMUM COMPARTMENT DIMENSIONS


Note – the base of this lamp is 1-3/8" by 1-3/8" and the opening in the reflector should be a minimum of 1-3/8" by 1-3/8" to insure a proper fit. For non-enclosed rated applications the minimum compartment must follow the below guidelines.

<p>Non-enclosed Fixture Horizontal Installation</p> 	Model Number		8PLH/8CCTS/HYBM
	Lamp Compartment Dimensions	Diameter	6-1/8"
		Height	4-3/4"
	Maximum Lamps in Luminaire		2
	Lampholder-to-Lampholder Spacing		3/8"
<p>Non-enclosed Fixture Vertical Installation</p> 	Model Number		8PLV/8CCTS/HYBM
	Lamp Compartment Dimensions	Diameter	6-5/16"
		Height	9-1/16"
	Maximum Lamps in Luminaire		1

Product warranty is defined based on the condition of above minimum compartment size, maximum lamps in glass/metal luminaire.

# CCT SELECT HYBRID PL


## INSTALLATION



Adjust the CCT select switch to proper CCT position.  
Note: Do not adjust the CCT select switch when power on.


### DIRECT INSTALLATION – MAGNETIC BALLAST

When used with a magnetic ballast, the lamp can function as a plug & play lamp and operate with the existing ballast.

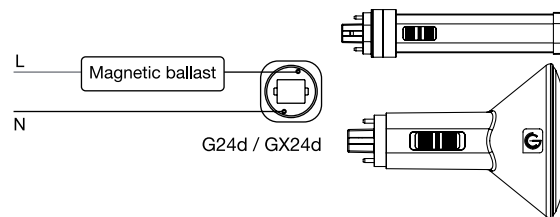





### BYPASS INSTALLATION – NO BALLAST

If the ballast is not compatible, it can be bypassed and the lamp can run directly off line voltage.

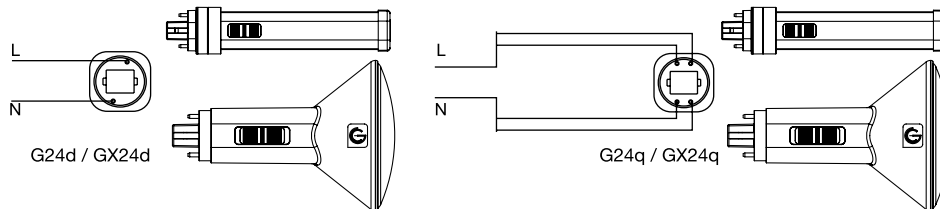

## ACCESSORY ORDERING INFORMATION

Product	Model	Description	Pictures	Dimensions	Compatible Skus
37934	8EMINVERTER	California Title 20 Compliant 8W Emergency LED Inverter (Field Installation)			8PLH/8CCTS/HYBM 8PLV/8CCTS/HYBM
38096	24EMINVERTER	California Title 20 Compliant 24W Emergency LED Inverter (Field Installation)			8PLH/8CCTS/HYBM 8PLV/8CCTS/HYBM



# CCT SELECT HYBRID PL

## LOGISTIC INFORMATION

Model	Master Carton			Shipping Carton		
	Case Qty	Case Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
8PLH/8CCTS/HYBM	6PCS	6-3/4" x 4-5/8" x 3-1/4"	1.32 lb	24PCS	13-7/8" x 9-15/16" x 4-3/4"	5.95 lb
8PLV/8CCTS/HYBM	6PCS	11-1/4" x 7-1/2" x 5-1/2"	2.42 lb	24PCS	30-11/16" x 12-1/4" x 6-15/16"	11 lb

## EXTENDED WARRANTIES\*\*\*

Model	Description
8PLH/8CCTS/HYBM/10YEARWARRANTY	10 Year warranty for 8PLH/8CCTS/HYBM
8PLV/8CCTS/HYBM/10YEARWARRANTY	10 Year warranty for 8PLV/8CCTS/HYBM

**FOOTNOTES:**

\*\*\* Warranty based on a maximum of 4,368 annual operating hours (per year for ten years) and exposure to a maximum ambient temperature of 80°F / 27°C.