


Project Name:	Type:
Part Number:	Date:

# BYPASS PLL

## FEATURES

- Integral driver suitable for 120-277V
- Replaces 18W / 24W / 36W / 40W 4-pin (2G11) CFL lamps
- High efficacy up to 129 LPW
- Opaque glass eliminates pixilation and reduces glare
- Plastic film prevents glass from shattering
- Extra wide 280° light emitting area
- Suitable for use in enclosed fixtures
- UL classified
- Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)
- Lamp ambient temperature: -4°F to 113°F (-20°C to 45°C)
- Rated lifetime (L70): 50,000hrs
- 5 year limited warranty\* / 10 year available (see EXTENDED WARRANTIES table for information)
- Suitable for all indoor general lighting applications and damp locations
- Each lamp is supplied with one support clip with adhesive back for quick installation

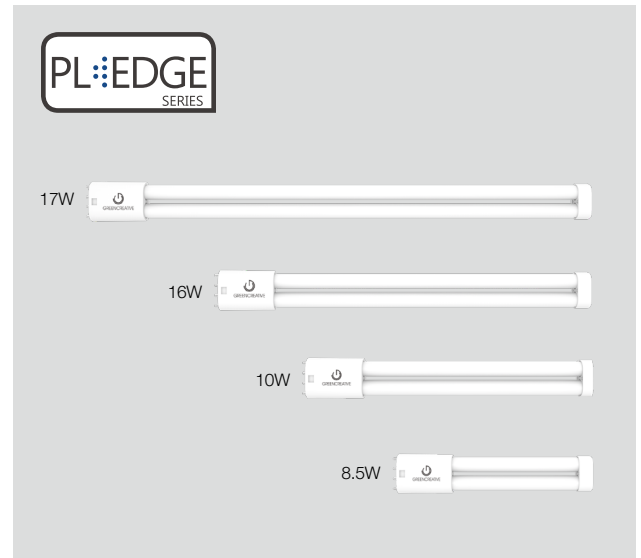

### DIGITAL NAVIGATION

Explore the spec sheet through the links below



- [SUPPLIED ACCESSORY](#)
- [DIMENSION & WEIGHT](#)
- [INSTALLATION](#)
- [ACCESSORY ORDERING INFORMATION](#)
- [EXTENDED WARRANTIES](#)
- [LOGISTIC INFORMATION](#)
- [CERTIFICATION INFORMATION](#)

## SPECIFICATIONS

Product	Model	Equiv.	Input Voltage	Wattage	Lumens	CCT	Efficacy (LPW)	Life (hrs)	CRI	Power Factor	THD	Beam Angle	Fixture Rating	DLC	DOE
34858	8.5PLL/835/GL/BYP	18W	120-277V	8.5	950	3500K	112	50,000	82	0.9	<20%	160°	Enclosed	N.A.	✓
34859	8.5PLL/840/GL/BYP	18W	120-277V	8.5	980	4000K	115	50,000	82	0.9	<20%	160°	Enclosed	N.A.	✓
34861	10PLL/835/GL/BYP	24W	120-277V	10	1,200	3500K	120	50,000	82	0.9	<20%	160°	Enclosed	N.A.	✓
34862	10PLL/840/GL/BYP	24W	120-277V	10	1,250	4000K	125	50,000	82	0.9	<20%	160°	Enclosed	N.A.	✓
34864	16PLL/835/GL/BYP	36W	120-277V	16	1,950	3500K	122	50,000	82	0.9	<20%	160°	Enclosed	N.A.	✓
34865	16PLL/840/GL/BYP	36W	120-277V	16	2,000	4000K	125	50,000	82	0.9	<20%	160°	Enclosed	N.A.	✓
36983	17PLL/830/BYP/R	40W	120-277V	17	2,150	3000K	126	50,000	82	0.9	<20%	160°	Enclosed	✓	✓
36984	17PLL/835/BYP/R	40W	120-277V	17	2,150	3500K	126	50,000	82	0.9	<20%	160°	Enclosed	✓	✓
36985	17PLL/840/BYP/R	40W	120-277V	17	2,200	4000K	129	50,000	82	0.9	<20%	160°	Enclosed	✓	✓

FOOTNOTES:  
\* Please visit [www.greencreative.com](http://www.greencreative.com) for Limited Warranty terms.


## SUPPLIED ACCESSORY

Product	Model	Description	Picture	Dimension	Weight
98015	PLLCLIP	Support clip with adhesive back for quick installation One support clip for each lamp included in the package			0.08oz



# BYPASS PLL

## DIMENSION & WEIGHT




Model	Base	MOL	Width	Weight
8.5PLL/xxx/GL/BYP	2G11	8-15/16"	1-11/16"	0.20 lb
10PLL/xxx/GL/BYP	2G11	12-11/16"	1-11/16"	0.25 lb
16PLL/xxx/GL/BYP	2G11	16-7/16"	1-11/16"	0.30 lb
17PLL/xxx/BYP/R	2G11	22-1/2"	1-11/16"	0.38 lb

## INSTALLATION



Step 1.

Cut all wires connected to the ballast, remove the ballast



Step 2.

Rewire the fixture according to the wiring configuration



## ACCESSORY ORDERING INFORMATION

Product	Model	Description	Pictures	Dimensions	Compatible Skus
38096	24EMINVERTER	California Title 20 Compliant 24W Emergency LED Inverter (Field Installation)			8.5PLL/8xx/GL/BYP 10PLL/8xx/GL/BYP 16PLL/8xx/GL/BYP 17PLL/8xx/BYP/R

## EXTENDED WARRANTIES\*\*\*\*

Model	Description*****
8.5PLL/GL/BYP/10YEARWARRANTY	10 Year warranty for 8.5PLL/8xx/GL/BYP/yy
10PLL/GL/BYP/10YEARWARRANTY	10 Year warranty for 10PLL/8xx/GL/BYP/yy
16PLL/GL/BYP/10YEARWARRANTY	10 Year warranty for 16PLL/8xx/GL/BYP/yy
17PLL/BYP/10YEARWARRANTY	10 Year warranty for 17PLL/8xx/BYP/yy

FOOTNOTES:

\*\*\*\* Warranty based on a maximum of 4,368 annual operating hours (per year for ten years) and exposure to a maximum ambient temperature of 80°F / 27°C.

\*\*\*\*\* xx - Refers to the CCT yy - Refers to model generations within the same nominal performance. Typically blank, 'R', or 'RC'.

## LOGISTIC INFORMATION

Model	Master Carton			Shipping Carton		
	Case Qty	Case Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
8.5PLL/xxx/GL/BYP	6PCS	11-5/8" x 4-3/8" x 3-9/16"	1.8lb	24PCS	12-7/16" x 9-7/16" x 7-7/8"	8.6lb
10PLL/xxx/GL/BYP	6PCS	15-3/8" x 4-3/8" x 3-9/16"	2.2lb	24PCS	16-1/8" x 9-7/16" x 7-7/8"	10.5lb
16PLL/xxx/GL/BYP	6PCS	19-3/16" x 4-3/8" x 3-9/16"	2.8lb	24PCS	20" x 9-7/16" x 7-7/8"	12.7lb
17PLL/xxx/BYP/R	6PCS	25" x 4-3/8" x 3-9/16"	3.5lb	24PCS	25-13/16" x 9-7/16" x 7-7/8"	15.3lb

FOOTNOTES: Where xxx means 824-965 which indicates CRI and color temperature.



# BYPASS PLL

## CERTIFICATION INFORMATION

Product	Model	DLC ID#
36983	17PLL/830/BYP/R	S-LXK9N8
36984	17PLL/835/BYP/R	S-RB418T
36985	17PLL/840/BYP/R	S-89YH6A