

# A19 6W DIM. TITANIUM LED SERIES 3.0



PRO



- ⌚ **Omnidirectional: 340° light emitting area**
- ⌚ **Exceptional efficacy 83 LPW in Warm White**
- ⌚ **40% energy savings compared to CFL**
- ⌚ **Comfortable warm diffused light**
- ⌚ **Natural A-lamp look fits all applications**
- ⌚ **Ideal for lamps with shades**


6W REPLACES



**40W Inc.**

80% Energy Savings

**\$108 Savings per lamp\***




## A19 PRODUCT FEATURES

### Omnidirectional Lighting



With a 340° light emitting area, this LED lamp seamlessly replaces CFL and incandescent light sources without losing light quality. The light provided by this 6W bulb fills lamp shades and fixtures without creating shadows, unlike typical A-type LED lamps.

### Exceptional Efficacy

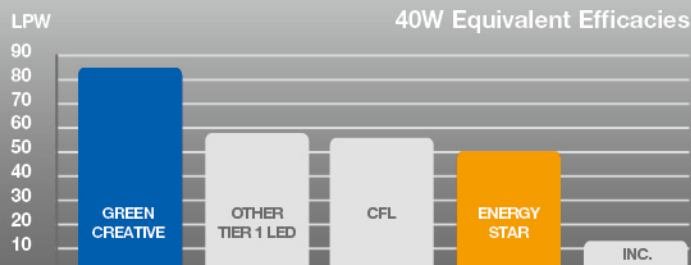

At 83 LPW, this lamp's efficacy is 39% higher than the Tier 1 LED A19 40W replacement industry average and exceeds ENERGY STAR requirements by upwards of 66%. This energy-saving performance makes this lamp a smart retrofit choice for incandescent and CFL bulbs.

# A19 6W DIM. TITANIUM LED SERIES 3.0



## APPLICATIONS

### Uplighting



### Downlighting



### Wall Lighting



## SPECIFICATIONS

Product Model	40682 6A19G3DIM/830WB	40681 6A19G3DIM/827WB	40683 6A19G3DIM/840WB
Type	A19	A19	A19
Base	E26	E26	E26
Power (W)	6	6	6
Voltage - Frequency	120V 60Hz	120V 60Hz	120V 60Hz
Color Temp. (ANSI)	Warm White 3000K	Warm White 2700K	Natural White 4000K
CRI (Ra)	80	80	80
Typical lumens (lm)	500	480	550
Efficacy (LPW)	83	80	92
Light Emitting Area	340°	340°	340°
Beam Angle	220°	220°	220°
Dimmable	Yes*	Yes*	Yes*
Power Factor	0.9	0.9	0.9
Rated Lifetime - L70 (hrs.)	30,000	30,000	30,000
Dia. x MOL	2.36"x4.29" (60x109mm)	2.36"x4.29" (60x109mm)	2.36"x4.29" (60x109mm)
Weight (lb. / g)	0.13lb. / 58g	0.13lb. / 58g	0.13lb. / 58g

\* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$2 incandescent with 1000 hr lifetime, \$18 LED with 30,000 hr lifetime

\*\* List of tested dimmer switches available on website

\*\*\* Not intended for use in totally enclosed fixtures

\*\*\*\* Suitable for damp locations. Not for use where directly exposed to weather or water