



GREENCREATIVE

 LUMINAIRES




CATALOG



### **Your partner for professional lighting solutions**

GREEN CREATIVE, founded in 2010, is a solid-state lighting development and manufacturing company based in Sanford, FL with an office in Shanghai. The company offers a comprehensive line of high-performance LED Lamp, Downlight and Track lighting solutions, widely adopted by some of the largest companies in the world.

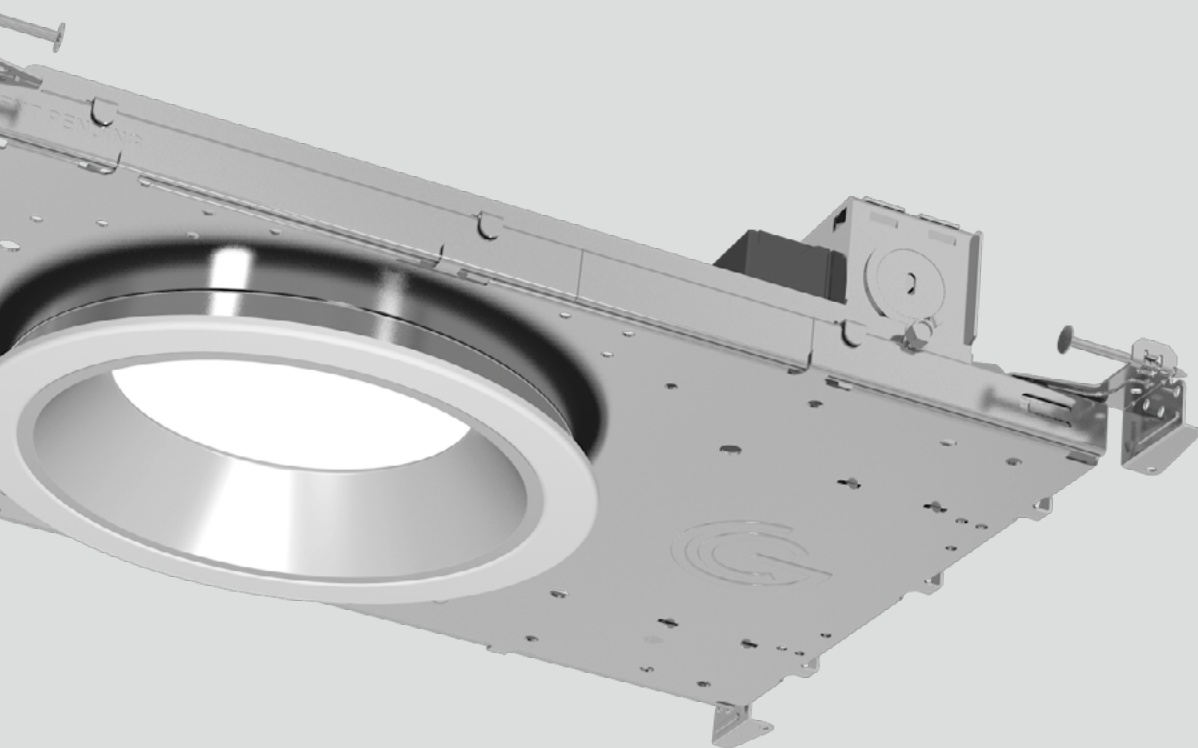

### **Bringing you the latest in LED technology**

Anchored by strong integrated R&D capabilities and patented technology, Our innovation, performance and reliability have been recognized year after year by the Illuminating Engineering Society Progress Report, the LEDs Magazine Sapphire Awards, Edison Report, NAILD and more.

### **A complete line with national & international distribution**

GREEN CREATIVE's full product line of ENERGY STAR®, DLC®, TITLE 20 & JA8 certified indoor retrofit and new construction lighting solutions serves the Retail, Hospitality, Food & Beverage, Office, Education & Industrial sectors through multiple distribution centers and sales networks across the USA.

# TABLE OF CONTENTS

COMMERCIAL & CYLINDER DOWNLIGHTING

P1-26




PXCYL  
P1-4



EXCYL  
P5-8



SPECFIT  
P9-12



NYX  
P13-16



SELECTFIT  
P17-20



INNOFIT  
P21-24



MULTIFIT  
P25-26

SURFACE DOWNLIGHTING

P27-30



SLIMFIT  
P27-28



SLIMDISK  
P29-30

TRACK

P31-42



NOVA  
P31-34



ORBIT  
P35-36



ATOM  
P37-38



SOL  
P39-40



TRACK SYSTEM  
P41-42

# 2025 FEATURED PRODUCTS




NEW!

P3-4

PXCYL Direct Indirect Cylinder

- Central monopoint suspension for clean shadowless light
- Innovative dual directional optical design
- Options of suspension and pendant mountings in 4" and 6" sizes

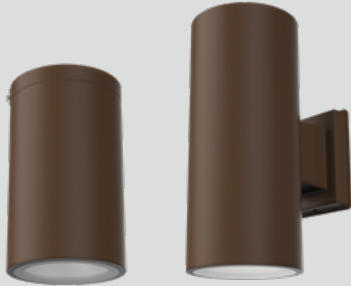

NEW!

P5-8

EXCYL Outdoor Cylinders

- Options of wall mount and surface mount cylinders for outdoor applications
- Fully embedded settings integrated in one product
- Build for durability and reliability in challenging outdoor environments



NEW!

P27-28

SLIMFIT Surface Mount

- Surface Mount Downlight in 5", 7" and 9" sizes
- Shallow fixture depth blends into ceilings
- Delivering light output from 820lm to 1,250lm for general lighting applications



NEW!

P29-30


SlimDisk Surface Mount

- Slim profile of only 7/8" below the ceiling
- Deliver up to 1,000 lumens with superior color accuracy of CRI 90
- Easy installation with innovative twist lock diffuser

PXCYL CYLINDER DOWNLIGHT



Comprehensive Mounting Choices

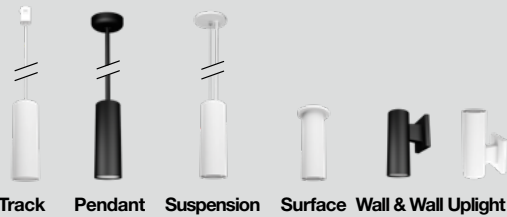

Multiple Sizes



Various Colors

Cylinder Finishes



Customized  
Please contact factory for customized finish and reflector options

Reflector Colors



Additional Controls


Standard Drivers




Driver & Control Options




3 Lumen Packages

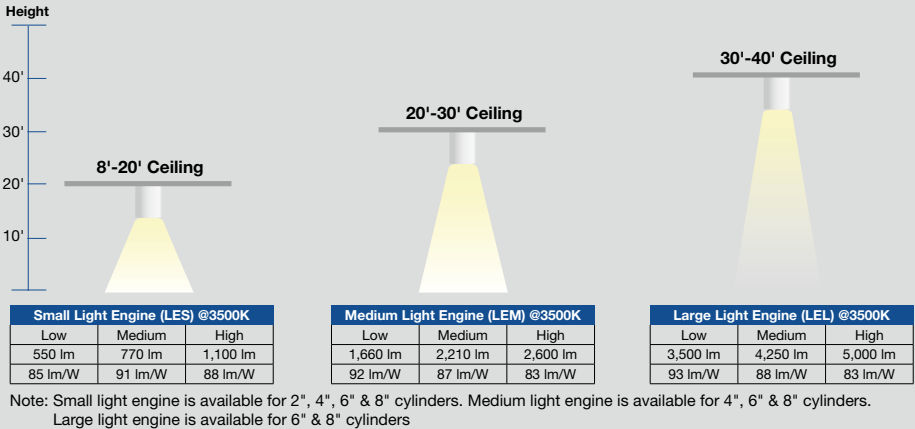


5 Color Temperatures



5 Beam Angles

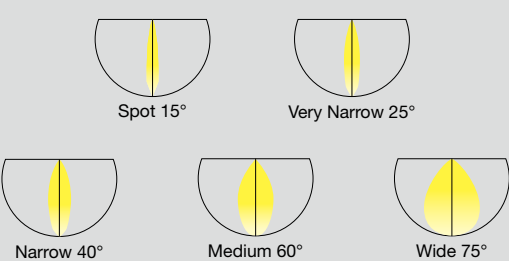

Deep Cutoff



SPECIFICATIONS										
Frame Housing	Mounting	Light Engine		CRI	CCT	Driver	Optical Distribution	Cylinder Finish	Reflector Finish	Options
PXCYL2 2" PXCYL Cylinder	SM Surface Mount	SelectDrive Light Engines		90 90+ CRI	27 2700K	SelectDrive Drivers KDIM120V SelectDrive 120V, 50/60Hz Forward/ Reverse phase dimming	SP Spot 15°	WH Matte White	CC Clear	EM-INT 6W Integrated EM Backup CEC Compliant
PXCYL4 4" PXCYL Cylinder	CM Cable Mount Ready	LE5 Small Light Engine 500-700-1000 lumens LEM Medium Light Engine 1500-2000-2500 lumens LEL Large Light Engine 3000-4000-5000 lumens		97 97 CRI 3000K only	30 3000K	KDIM010UNV SelectDrive 120-277V, 50/60Hz 0-10V dimming	VN Very Narrow 25°	BL Matte Black	WH White	WET Wet Location Ready
PXCYL6 6" PXCYL Cylinder	PM Pendant Mount Ready	Fixed Output Light Engines			35 3500K	PSRUNV 0-10V Driver + SR Ready Bridge, 120-277V XT010UNV Signify 0-10V Driver 1% Dimming, 120-277V	NR Narrow 40°	CZ Customized	CZ Customized	AWNRR Lutron Athena Node
PXCYL8 8" PXCYL Cylinder	WM Wall Mount	LE05 500 lumens	LE25 2500 lumens		40 4000K	LUT-1UNV Lutron EcoSystem 1% Dimming, 120-277V	MD Medium 60°			ES Philips EasySense ceiling mount sensor
	WMUP Wall Mount Up Lighting	LE07 700 lumens	LE30 3000 lumens		50 5000K	LUT-SUNV Lutron EcoSystem 5% Dimming, 120-277V LUT-L3DUNV Lutron Hi-lume 3-Wire 1% Dimming, 120-277V	WD Wide 75°			ENLS - IL Enlighted Two Wire ENLIGHTED ONE Compact Sensor
	TJPM Track J-Type Suspended Mount	LE10 1000 lumens	LE40 4000 lumens			ELD-E010UNV EldoLED ECOdrive 0-10V 1%, 120-277V ELD-EDALIUNV EldoLED ECOdrive DALI 1%, 120-277V ELD-S010UNV EldoLED SOLOdrive 0-10V 0.1%, 120-277V ELD-SDALIUNV EldoLED SOLOdrive DALI 0.1%, 120-277V OSRDIM010347V Osram OPTOTRONIC 0-10V 1%, 347V				ENLS - CL Enlighted Two Wire CONNECTED LIGHTING Compact Sensor
		LE15 1500 lumens	LE50 5000 lumens							ENLS - IOT Enlighted Two Wire IOT Compact Sensor
		LE20 2000 lumens								


Note: refer to product spec sheet for configuration details.





Central Monopoint Suspension for Clean Shadowless Light

Available for either stem pendant or cable suspension with central monopoint mounting, the PXCYL direct / indirect cylinder brings a clean shadowless upward lighting effect on the ceiling, providing a sense of depth and security while limiting the cave effect.

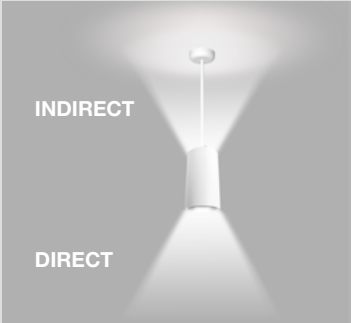

SPECIFICATIONS											
Model Series	Size	Mounting	Output (Direct/Indirect) <sup>2</sup>	CRI	CCT <sup>4</sup>	Driver	Optic Direct	Optic Indirect	Cylinder Finish	Reflector Finish	Options
PXCYLDI Indoor PXCYL Cylinder Direct/Indirect	4 4"	CM <sup>1</sup> Cable Mount Ready	LEM Medium Light Engine 70% Direct (Down) 2150/1785/1275lm, 30% Indirect (Up) 850/695/475lm	9 90+ CRI	30 3000K	DIM120V SelectDrive 120V	SP Spot 15°	MD Medium 60°	WH Matte White	CC Clear	For Emergency options please see field installable options below
	6 6"	PM <sup>1</sup> Pendant Mount Ready	LEL Large Light Engine 70% Direct (Down) 3950/3400/2800lm, 30% Indirect (Up) 1650/1450/1200lm		35 3500K	DIM010UNV SelectDrive 0-10V	VN Very Narrow 25°	WD Medium 75°	BL Matte Black	WH White	
		*For Wall Mount option please see EXCYL Cylinder Series	LE <sup>xxyy</sup> Fixed Lumens 70% Direct (Down) xx= 21, 18, 13 / 40, 34, 28 Fixed Lumens 30% Indirect (Up) yy= 09, 07, 05 / 17, 15, 12		40 4000K		NR Narrow 40°		BZ Bronze		
							MD Medium 60°		SV <sup>3</sup> Silver		
							WD Medium 75°		CZ <sup>3</sup> Customized		

1 Cable and Pendant Mount ready for Stem or Cable Suspension, order Canopy type and length separately. 2 LEL (LE xx=40, 34, 28 yy= 17, 15, 12) are not available for 4" Cylinder. 3 Non-stock item: may be subject to extended lead time and minimum order quantity. Please contact factory for silver, bronze and customized finish color or customized reflectors for details. 4 CCT is the same direct and indirect



Elevate Your Atmosphere Upward and Downward

Discover the pinnacle of suspended cylinder lighting with a uniquely singular point fixture that delivers pristine direct and indirect illumination. The design enhances spatial perception and eliminates any trace of a cave-like feel.

Innovative Dual Directional Optical Design

The unique circular upward optic design allows for both indirect and direct light sources to be packed within a compact cylinder profile. With only 1.5" depth added, the product elevates your atmosphere with a brighter and more spacious ceiling while still keeping a pleasant unobstructive floating cylinder in the space.

UPLIGHT

Light Output 30% (500lm - 1,600lm)  
Beam Angle 60° / 75°

DOWNLIGHT

Light Output 70% (1,300lm - 4,000lm)  
Beam Angle 15° / 25° / 40° / 60° / 75°



A Complementary Solution in PXCYL Cylinder Series Family

Featuring the same design and finish options as the PXCYL downlight cylinders, the direct/indirect model also includes SelectDrive technology, allowing for three adjustable lumen output levels. With a high CRI of 90 and precise LED binning, it provides excellent color accuracy and uniform illumination in both upward and downward directions.

Mounting Options




Cylinder Finishes

Reflector Colors







Select Drive      Select Kelvin



3"




4"



6"

Direct-Indirect Illumination Simplified

The unique EXCYL design combines both indirect and direct light sources within a compact cylinder profile, delivering clean beams for both types of illumination. The product can be configured for direct-indirect, direct-only, or indirect-only lighting to perfectly meet the specific needs of the space.

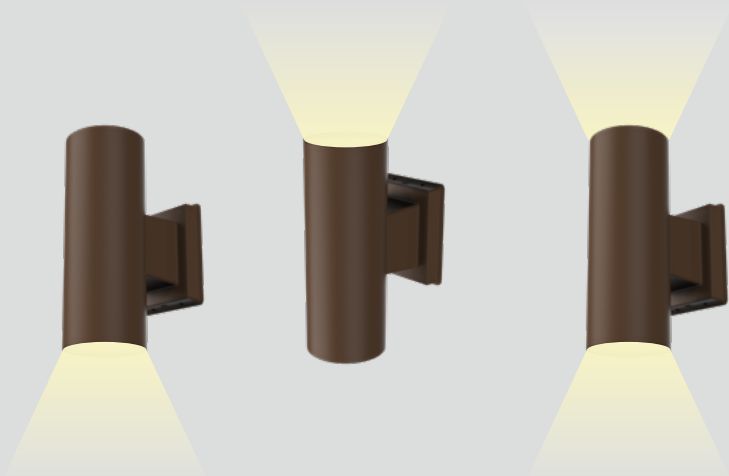

SPECIFICATIONS									
Model Series	Size	Mounting	Output	CRI	CCT	Optical Distribution	Cylinder Finish	Reflector Finish	Options
EXCYL Outdoor EXCYL Cylinder	3 3"	SM Surface Mount	S 3" Small Light Engine Selectable 1200/900/700lm	8 80+ CRI	CCT3S Selectable 3000/3500/4000K	SP Spot 15°	BZ Bronze	CC Clear	For Emergency options please see field installable options below
	4 4"	WMDI Wall Mount Direct-Indirect	M 4" Medium Light Engine Selectable 2200/1800/1400lm		30 3000K Factory Preset	VN Very Narrow 25°	BL Matte Black		
	6 6"	WMD Wall Mount Direct	L 6" Large Light Engine Selectable 3200/2600/2200lm		35 3500K Factory Preset	NR Narrow 40°	WH Matte White		
		WMI Wall Mount Indirect			40 4000K Factory Preset	MD Medium 60°	SV Silver		
							CZ <sup>6</sup> Customized		

Note: refer to product spec sheet for configuration details.



Outdoor Illumination Simplified

A versatile wall-mounted direct-indirect cylinder that simplifies specification by integrating all settings and the photocell into a single SKU, while providing clean and precise up-and-down beams.

Standard Bronze Finish with Customized Options



Bronze



Matte Black



Matte White



Customized  
Please contact factory for customized finish options



4 Different Beam Options

Benefit from a selection of 4 beam angles 15°, 25°, 40° & 60°. Illuminate your wall or floor with clean beams and excellent cutoff and glare light control.



Spot 15°



Very Narrow 25°




Narrow 40°




Medium 60°

Build for Durability and Reliability in Challenging Outdoor Environments

EXCYL is designed to work in a wide ambient temperature range (-40°C to +40°C) with an IP65 rating, ensuring durability and reliability in challenging outdoor environments.

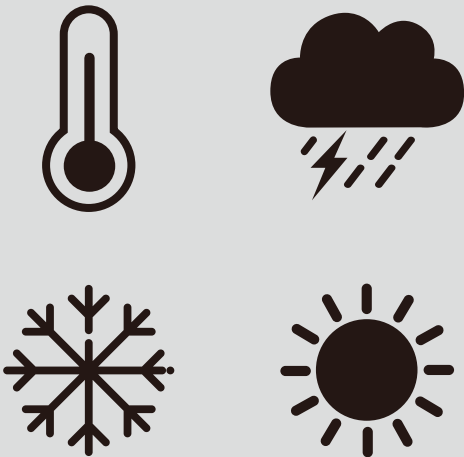

Surface Mount

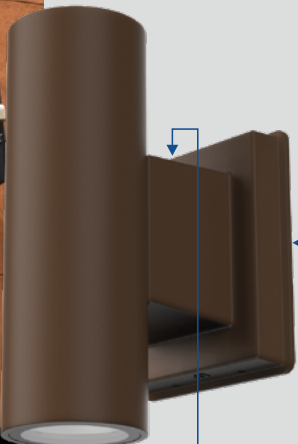

Wall Mount



**CCT Switch**  
3000K / 3500K / 4000K

**Power Switch**  
High / Med / Low



**Photocell Switch**  
OFF / ON

**CCT Switch**  
3000K / 3500K / 4000K

**Power Switch**  
High / Med / Low

Fully Embedded Settings

3 CCTs In One with SelectKelvin Technology



Select the perfect CCT to complement your space. Adjust it on-site to create the desired ambiance and highlight textures or architectural features.


3 Lumens In One with SelectDrive Technology



Choose from a total lumen range of 600 to 3500 lumens to customize your space. Achieve the ideal light output by optimizing the settings. The up and down lumens are evenly distributed at a 50/50 ratio.

Integrated Photocell on Wall Mounted Series

Seamlessly integrated into the wall bracket for a superior aesthetic. Equipped with a standard override switch for added convenience

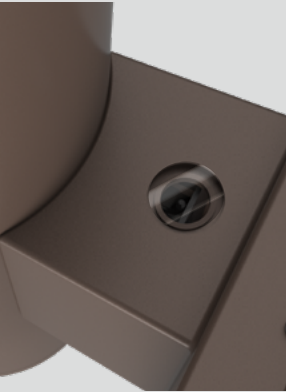


Integrated Photocell Sensor



SPECFIT RETROFIT COMMERCIAL DOWNLIGHT



CHOICE OF MULTIPLE OPTICS


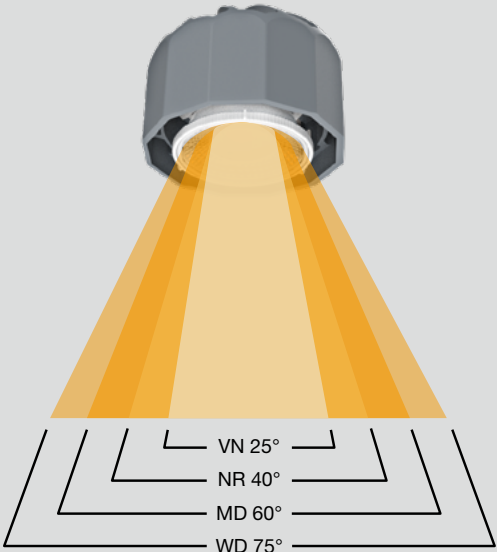


- Field interchangeable optics
- Selectable light output
- 97 CRI modules meet TRUE CHROMA standard
- Multiple reflector options - CC, CW, WH & BL

SELECTABLE LIGHT OUTPUT




SelectDrive Technology - Adjustable Lumen Output



ADDITIONAL CONTROLS

Take even more control of SPECFIT fixtures with a variety of control system options. These include the Lutron 5-Series Ecosystem driver which provides smooth dimming to 5% and the Lutron Hi-Lume 1% EcoSystem driver with Soft-On, Fade-to-Black which dims to 1%. EldoLED ECOdrive and SOLOdrive drivers available in 0-10V and DALi configurations and dim smoothly to 1% and 0.1% respectively. Additional sensors such as enlightened compact sensors and Philips EasySense sensors, can be field installed and directly integrate with the factory provided Philips Xitanium driver and Sensor Ready Bridge.

OPTICAL CUTOFF

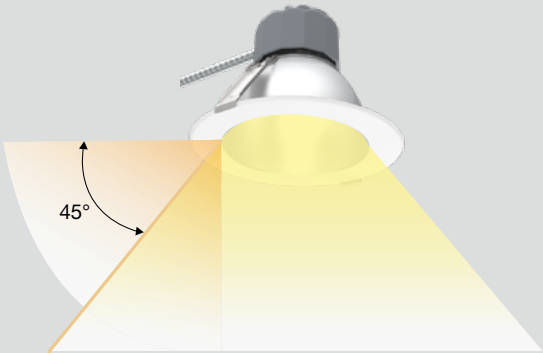

45° optical cutoff provide a quiet ceiling with minimal glare and maximum efficiency.

ACCESSORIES

Product	Model	Description
98079	ADAWW	Wall Wash Accessory
98569	GOOFRING4	4" Goof Ring - Outer Diameter 8-1/8"
98568	GOOFRING6	6" Goof Ring - Outer Diameter 10-1/2"
98567	GOOFRING8	8" Goof Ring - Outer Diameter 12-1/2"
98566	GOOFRING9.5	9.5" Goof Ring - Outer Diameter 14-3/16"
NURO7/CM		NUROAir Bluetooth Ceiling Mount Dual Mode Sensor
NURO-SW-3B-BA-BL-WP-V1		NUROAir 3-Button Bluetooth Battery Powered Wall Switch
NURO-SW-3B-BA-BL-WP-V1		NUROAir 5-Button Bluetooth Battery Powered Wall Switch
NURO-SW-7B-AC-BL-WP-V1		NUROAir 7-Button Bluetooth Line Voltage (AC 120-277V) Powered Wall Switch

SPECIFICATIONS					
Light Engine and Driver					
Light Engines	CRI	CCT	Driver	Optical Distribution	Options
SelectDrive Light Engines	90	27	SelectDrive Drivers	MD	SD347
LES	90+ CRI	2700K	KDIM120V	Medium 60°	347V - 240V
Small Light Engine			120V, 50/60Hz	(Installed Standard)	Step Down Transformer
LEM			Forwad/Reverse Phase dimming		
Medium Light Engine	97	30	KDIM010UNV	SP	EM
1500-2000-2500 lumens	97 CRI	3000K	K-case Driver, SelectDrive 120-277V, 50/60Hz. Dimmable to 5%.	Spot 15°	10.7W Title 20 Compliant Emergency Backup
LEL	3000K only		KDIM010UNV		
Large Light Engine		35	SelectDrive 120-277V,50/60Hz	VN	AWNRR
3000-4000-5000 lumens		3500K	0-10V dimming	Very Narrow 25°	Lutron Athena Node
Fixed Output Light Engines			Fixed Output Drivers		
LE05			XT010UNV	NR	OUT
500 lumens		40	Signify 0-10V Driver 1% Dimming, 120-277V	Narrow 40°	Outdoor Debris Ingress Protection
LE25			ELD-E010UNV		
2500 lumens			EldoLED ECOdrive 0-10V 1%, 120-277V		
LE07			LUT-1UNV	WD	WET
700 lumens		50	Lutron EcoSystem 1% Dimming, 120-277V	Wide 75°	Wet location option
LE10			LUT-5UNV		
1000 lumens			Lutron EcoSystem 5% Dimming, 120-277V		
LE15			LUT-L3DUNV		
1500 lumens			Lutron Hi-lume 3-Wire 1% Dimming, 120-277V		
LE20			ELD-SDALIUNV		
2000 lumens			EldoLED SOLOdrive DALI 0.1%, 120-277V		
Reflector					
Shape & Size			Finish		
ADR4	ADS4	ADR6	ADS6	CC	WH
4" Round	4" Square	6" Round	6" Square	Clear Diffuse Trim and Flange	Matte White Trim and Flange
ADR8		ADR9.5		CW	BL
8" Round		9.5" Round		Clear Diffuse Trim, White Flange	Matte Black Trim and Flange


Note: refer to product spec sheet for configuration details.



SPECFIT NEW CONSTRUCTION DOWNLIGHT



SelectDrive

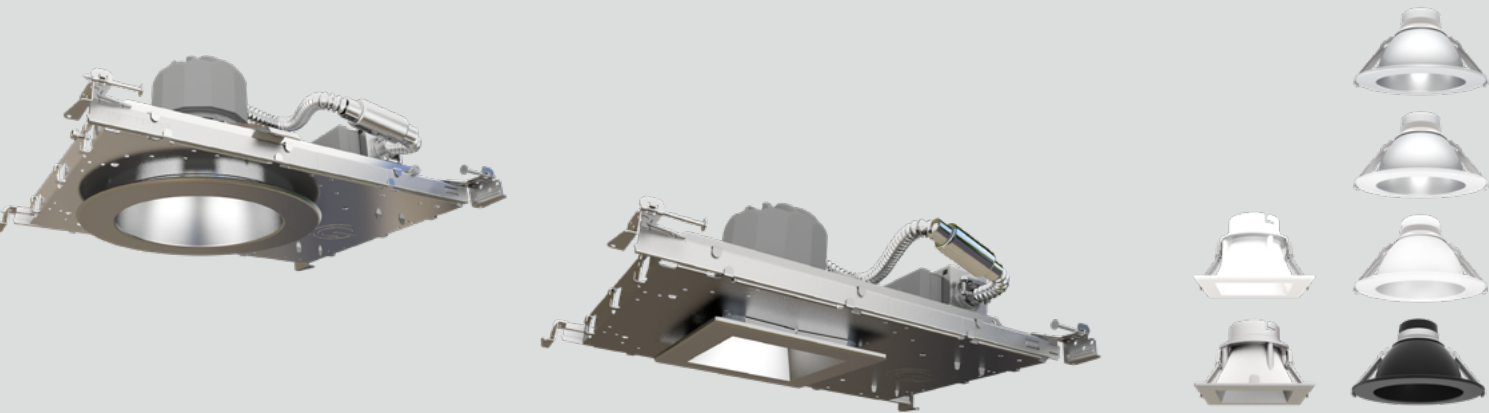


SPECIFICATIONS						
Light Engine and Driver						
Frame Housing	Light Engines	CRI	CCT	Driver	Optical Distribution	Options
<b>SPFTR4</b> 4" SPECFIT Round New Construction	<b>SelectDrive Light Engines</b>  <b>LES</b> Small Light Engine 500-700-1000 lumens	<b>90</b> 90+ CRI	<b>27</b> 2700K	<b>SelectDrive Drivers</b>  <b>KDIM120V</b> 120V, 50/60Hz Forward/Reverse Phase dimming	<b>MD<sup>4</sup></b> Medium 60° (Installed Standard)	<b>SD347</b> 347V - 240V Step Down Transformer
<b>SPFTR6</b> 6" SPECFIT Round New Construction	<b>LEM</b> Medium Light Engine 1500-2000-2500 lumens	<b>97</b> 97 CRI 3000K only	<b>30</b> 3000K	<b>KDIM010UNV</b> SelectDrive 120-277V,50/60Hz 0-10V dimming	<b>SP</b> Spot 15°	<b>EM</b> 10.7W Title 20 Compliant Emergency Backup
<b>SPFTR8</b> 8" SPECFIT Round New Construction	<b>LEL</b> Large Light Engine 3000-4000-5000 lumens		<b>35</b> 3500K	<b>Fixed Output Drivers</b>  <b>XT010UNV</b> Signify 0-10V Driver 1% Dimming, 120-277V	<b>VN</b> Very Narrow 25°	<b>OUT</b> Outdoor Debris Ingress Protection
<b>SPFTR9.5</b> 9.5" SPECFIT Round New Construction	<b>Fixed Output Light Engines</b>  <b>LE05</b> 500 lumens <b>LE07</b> 700 lumens <b>LE10</b> 1000 lumens <b>LE15</b> 1500 lumens <b>LE20</b> 2000 lumens		<b>40</b> 4000K  <b>50</b> 5000K	<b>ELD-E010UNV</b> EldoLED ECOdrive 0-10V 1%, 120-277V  <b>ELD-EDALIUNV</b> EldoLED ECOdrive DALI 1%, 120-277V  <b>ELD-S010UNV</b> EldoLED SOLOdrive 0-10V 0.1%, 120-277V  <b>ELD-SDALIUNV</b> EldoLED SOLOdrive DALI 0.1%, 120-277V	<b>NR</b> Narrow 40°	<b>WET</b> Wet location option
<b>SPFTS4</b> 4" SPECFIT Square New Construction				<b>LUT-1UNV</b> Lutron EcoSystem 1% Dimming, 120-277V  <b>LUT-5UNV</b> Lutron EcoSystem 5% Dimming, 120-277V  <b>LUT-L3DUNV</b> Lutron Hi-lume 3-Wire 1% Dimming, 120-277V	<b>WD</b> Wide 75°	<b>NURO/RCM</b> NUROAir Ready Power Pack for Ceiling Mount Sensor
<b>SPFTS6</b> 6" SPECFIT Square New Construction						
Reflector						
Shape & Size				Finish		
<b>ADR4</b> 4" Round	<b>ADS4</b> 4" Square	<b>ADR6</b> 6" Round	<b>ADS6</b> 6" Square	<b>CC</b> Clear Diffuse Trim and Flange	<b>WH</b> Matte White Trim and Flange	
<b>ADR8</b> 8" Round		<b>ADR9.5</b> 9.5" Round		<b>CW</b> Clear Diffuse Trim, White Flange	<b>BL</b> Matte Black Trim and Flange	

Note: refer to product spec sheet for configuration details.



NEW CONSTRUCTION FRAME

The SPECFIT new construction frames, made of the highest quality galvanized steel, are designed to be installed in suspended T-grid or wood joist ceilings. The low profile bar hangers with non-pass through construction and leveling flanges contain an integral tee bar clip and preinstalled nail, quick and safe installation in standard 2x2' and 2x4' suspended ceilings. The attached junction box and prewired driver, with quick connect MC cable allows for easy fixture wiring. Optional field installable butterfly brackets are also available for C-Channel or conduit suspension. EM unit can be factory installed on demand with a specifically designed bracket.

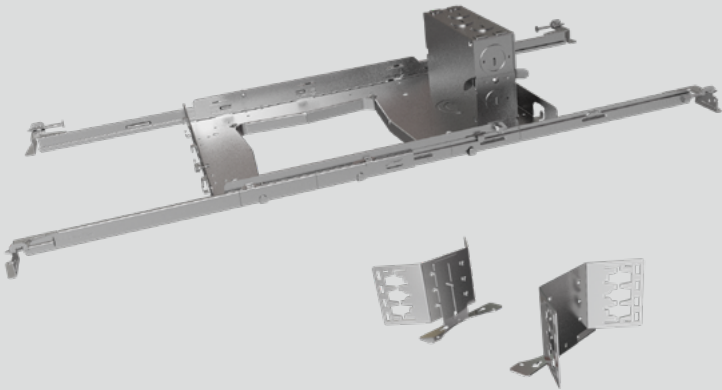

TRUE CHROMA


SPECFIT, powered by TRUE CHORMA technology, has the highest color accuracy standard in the market. TRUE CHROMA starts with a maximum 3 step SDCM LED light source. Then, based on the traditional CRI and new IES TM-30-15 standards, TRUE CHROMA delivers CRI ≥ 95, R9 ≥ 50 and Rf ≥ 93. Rest assured that new spaces lit with SPECFIT fixtures powered by TRUE CHROMA will look their best.

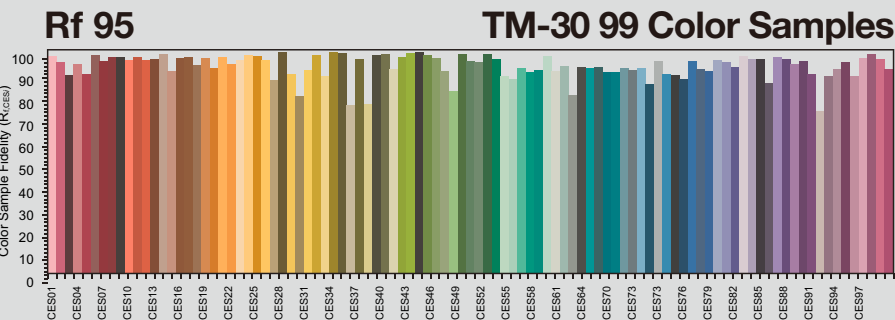

Rf: 95, Rg: 100

ACCESSORIES		
Product	Model	Description
98079	ADWAW	Wall Wash Accessory
35126	NCFBFB	Set of Two Field Installable Butterfly Brackets For New Construction Rough-in Frame
35125	NCFEMB	Field Installable Emergency Bracket For New Construction Rough-in Frame
	NURO7/CM	NUROAir Bluetooth Ceiling Mount Dual Mode Sensor
	NURO-SW-3B-BA-BL-WP-V1	NUROAir 3-Button Bluetooth Battery Powered Wall Switch
	NURO-SW-3B-BA-BL-WP-V1	NUROAir 5-Button Bluetooth Battery Powered Wall Switch
	NURO-SW-7B-AC-BL-WP-V1	NUROAir 7-Button Bluetooth Line Voltage (AC 120-277V) Powered Wall Switch

NYX NEW CONSTRUCTION DOWNLIGHT

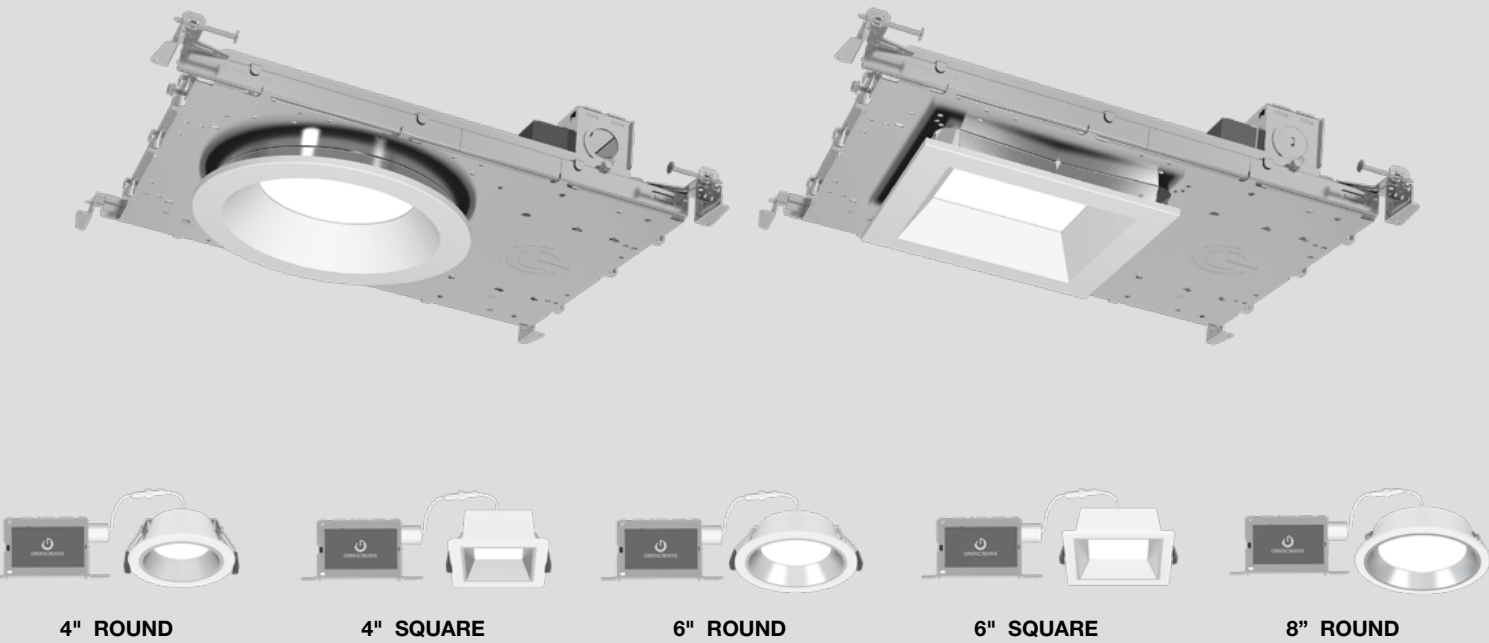

SPECIFICATIONS							
Series	Installation Type	Size	Style	Lumen	CRI	CCT	Driver
NYX NYX series downlights	<b>NC</b> New Construction Frame	<b>4</b> 4"	<b>RD</b> Round	<b>S</b> 700/1000/1500 /2000lm	<b>9</b> 90+ CRI	<b>CCT5S</b> Selectable CCT 2700K / 3000K / 3500K / 4000K / 5000K	<b>DUALDIM</b> 120V-277V, 50/60Hz. 0-10V or Forward/Reverse phase dimming at 120V only.
	<b>ICAT</b> New Construction With IC Cover	<b>6</b> 6"	<b>SQ</b> Square	<b>M</b> 2500/3000/ 4000lm			
	<b>DM</b> Direct Mount, Remodel	<b>8</b> 6"		<b>L</b> Large Selectable L/M/H 4000/5000/6000lm			
				<b>Fxx</b> Fixed Lumens xx= 07, 10, 15, 20, 25, 30, 40, 50, 60			
Optic		Reflector and Flange				Options	
<b>WD</b> Wide 90D Distribution 1.2 SC/H		<b>CW</b> Clear Reflector with White Flange				<b>EM</b> 6W Emergency LED Driver	
<b>MD</b> Medium 70D Distribution 1.0 SC/H		<b>CC</b> Clear Reflector with Clear Flange (Dead Front)				<b>AWNRR</b> Lutron Athena Node	
<b>WW</b> Wall Wash		<b>WW</b> White Reflector with White Flange (Dead Front)				<b>NURO/RCM</b> NUROAir Ready Power Pack for Ceiling Mount Sensor	
		<b>BB</b> Black Reflector with Black Flange (Dead Front)					
		<b>WBW</b> White Baffle Reflector with White Flange					
		<b>BBW</b> Black Baffle Reflector with White Flange					

Note: refer to product spec sheet for configuration details.

Downlighting Reborn

With integrated SelectDrive, SelectKelvin and DualDim technologies, abundant options of field installable accessories, and unique can-less compact design, NYX revives customized downlighting design in any new construction project.

Emergency Back-Up Option

- Factory Installed 6W EM Driver
- Field Installable 21W to 25W EM Inverters

DualDim Driver

- 120-277V Input
- One driver suitable for both 0-10V and 120V TRIAC/ELV dimming systems



Selectable CCT

SelectKelvin

- 2700K Soft White
- 3000K Warm White
- 3500K Neutral White
- 4000K Cool White
- 5000K Day Light


Selectable Lumen Levels

SelectDrive

	4" / 6" / 8" Small Engine	4" / 6" / 8" Medium Engine	8" Large Engine
High	2000lm	4000lm	6000lm
Med	1500lm	3000lm	5000lm
Low	1000lm	2500lm	4000lm
Extra Low	700lm		

Lens

- Wide
- Medium




Wall Wash

- Cut off degree of 30° (round) & 20° (square)
- White or clear finish




Super Shallow Design

- Less than 4" depth on standard product

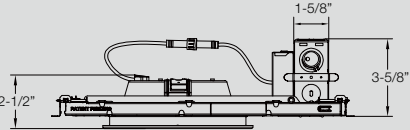


Direct Mount




New Construction


Reflector & Flange

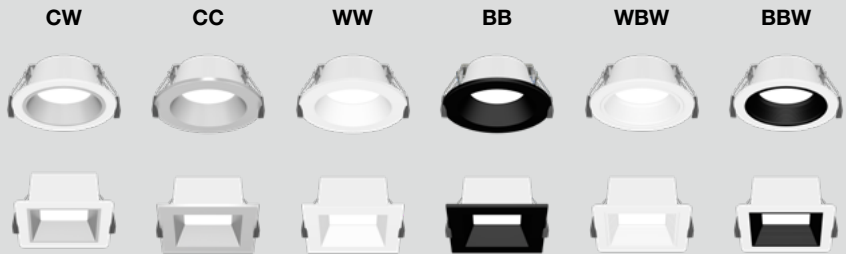

Various Form Factors

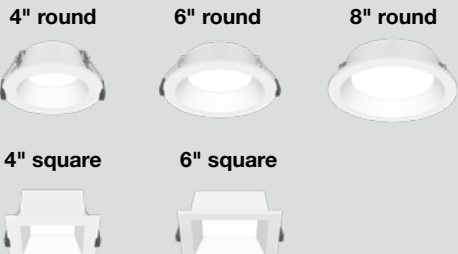

# NYX NEW CONSTRUCTION DOWNLIGHT

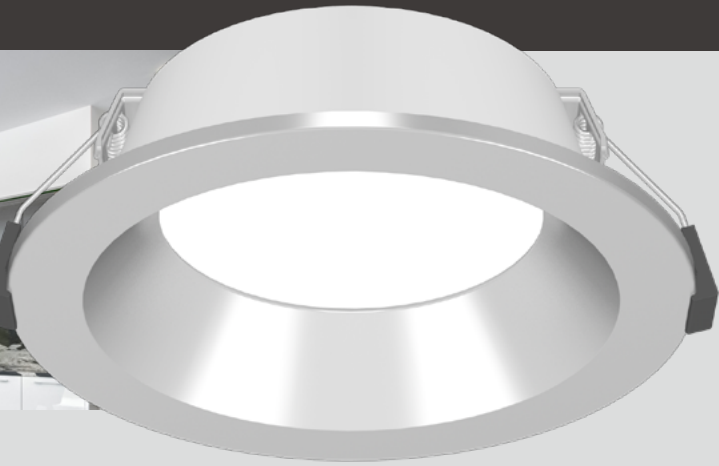

## Performance With Durability In Mind

NYX has been thought with performance in mind without compromising on design and allows for installing virtually anywhere. The products are engineered in a super shallow design of less than 4", IC and Air-Tight rated, suitable for wet locations, Energy Star certified and meeting Title 24 JA8 requirements. With calculated L70 of 100,000 hours, tight LED binning within 3 SDCM and high CRI 90, NYX downlights ensure uniform and vivid lighting for your space.

## Simplicity From Installation To Upgrade

NYX is designed with a complete toolless field installation doable in seconds, for both new construction or direct mount. All parts are upgradable or serviceable from below the ceiling. You can relax when installing a NYX downlight for both ease of maintenance or future upgrade if the space requires.

## Ready For Any Dimming Protocol

All NYX products are suitable for 120-277V input and feature our DualDim technology allowing the luminaire to be dimmed with either TRIAC/ELV or 0-10V controls. Taking the guesswork out of auditing an existing space and providing optimal flexibility while minimizing un-expected installation issues in the field. NYX is the right solution for all your projects in residential, commercial, mixed-use, new construction or remodel applications.


## Integrated CCTs and Lumens Options

### Select Kelvin


Utilizing our SelectKelvin technology, select the CCT before, during, or after installation with just the flip of a switch. Choose from 2700/3000/3500/4000 /5000K CCT to customize any application and set the right atmosphere for your space.

### Select Drive

Get the right amount of light with NYX powered by SelectDrive technology. Choose either Extra low, Low, Medium or High light output. With just the flip of a switch on the driver, NYX ensures that every space has just the right amount of light from 700lm to 4000lm.

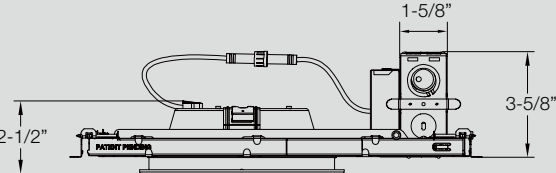


### Selectable CCT

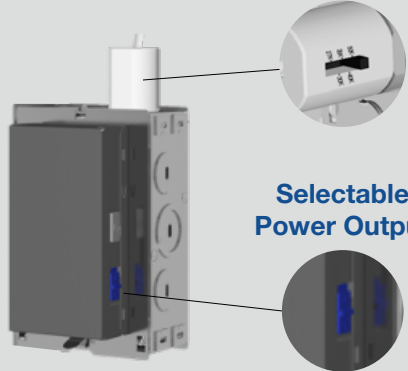

### Selectable Power Output


## A Solution For Different Height And Spacing

With NYX you can get the right amount of light for any project, ranging from smooth 700lm to powerful 6000lm, no matter your ceiling height and your plenum space thanks to its super shallow design, NYX is the right solution for your space. With different beam angle option in wide and medium distributions, NYX has a solution for each room size and height to offer an even illumination with a neat ceiling.

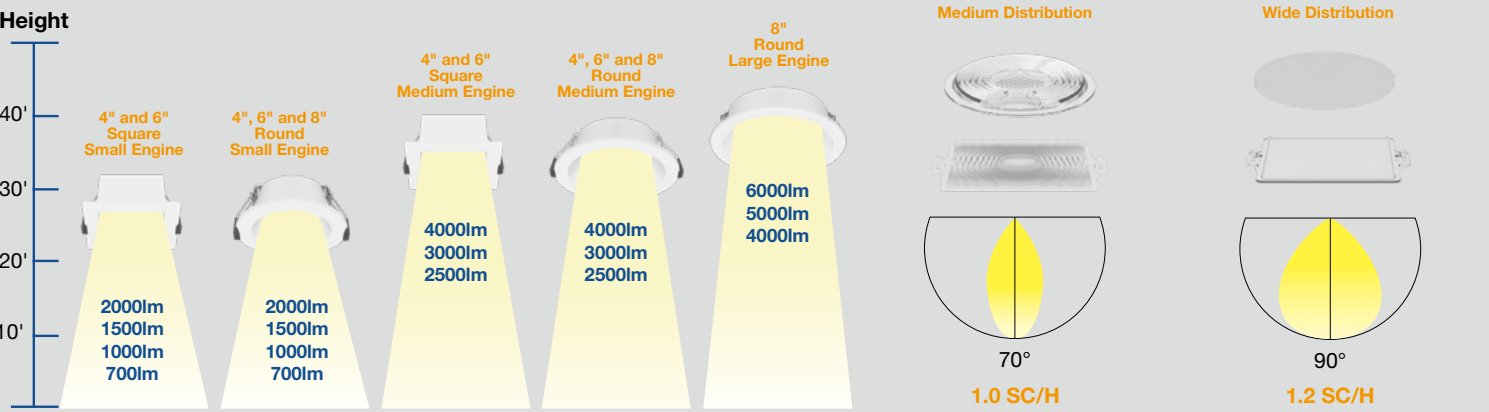

## Various Sizes and Shapes With Abundant Reflector Selections

NYX downlights give architect, lighting designer or contractor an unmatched versatility with a galaxy of reflectors options and finishes. Including full clear, white and black dead front for specific damp or wet location usage, black baffle or white baffle style with white flange for smoother and lower glare light output and the classical clear and white flange for an ageless design. Wall wash kicker options are also available in clear and white, to complement the NYX possibilities, for wall grazing.

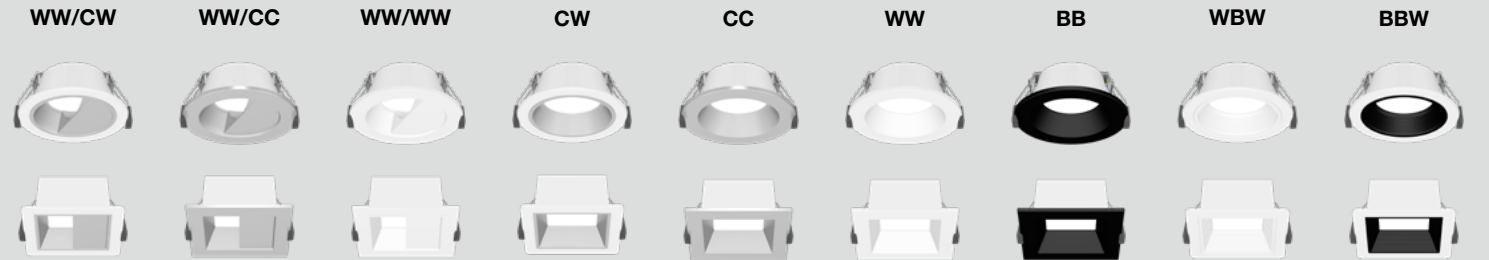

ACCESSORIES		
Product	Model	Description
35126	NCFBFB	Field Installable Butterfly Brackets For New Construction Frame
35125	NCFEMB	Field Installable Emergency Bracket For New Construction Frame
98568	GOOFRING6	6" Goof Ring - Outer Diameter 10-1/2"
98567	GOOFRING8	8" Goof Ring - Outer Diameter 12-1/2"
37934	8EMINVERTER	California Title 20 Compliant 8W Emergency LED Inverter (Field Installation)
37935	21EMINVERTER	California Title 20 Compliant 21W Emergency LED Inverter (Field Installation)
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver (Field Installation)
FHUPS1-UNV-25L-SD	FHUPS1-UNV-25L-SD	25W Emergency Micro Inverter for field installation to use with 0-10V Driver options. 100-277VAC (up to 150W with use of 0-10V dimming). CEC Compliant
NURO7/CM		NUROAir Bluetooth Ceiling Mount Dual Mode Sensor
NURO-SW-3B-BA-BL-WP-V1		NUROAir 3-Button Bluetooth Battery Powered Wall Switch
NURO-SW-3B-BA-BL-WP-V1		NUROAir 5-Button Bluetooth Battery Powered Wall Switch
NURO-SW-7B-AC-BL-WP-V1		NUROAir 7-Button Bluetooth Line Voltage (AC 120-277V) Powered Wall Switch





Greater Selection. Better FIT.

SELECTFIT G2 from GREEN CREATIVE brings greater flexibility to your retrofit project or new construction application while maintaining the excellent performance and quality. With a total of 180 field installable SKUs packed in only 6 product SKUs, this new and improved lighting family still offers integrated CCT and lumen output selections. For additional flexibility, the SELECTFIT G2 series now features DualDim technology and a full set of accessories.

More Integrated CCT and Lumen Options


SelectDrive

Get the right amount of light with SELECTFIT still powered by SelectDrive technology. Choose from Low, Medium or High light outputs. With just the flip of switch, ensure that every space has just the right amount of light from 600lm to 4500lm.



SelectKelvin

Utilizing our SelectKelvin technology, select the CCT before, during, or after installation with just the flip of a switch. Choose from 2700/3000/3500/4000/5000K CCTs to customize any application and set the right atmosphere for your space.

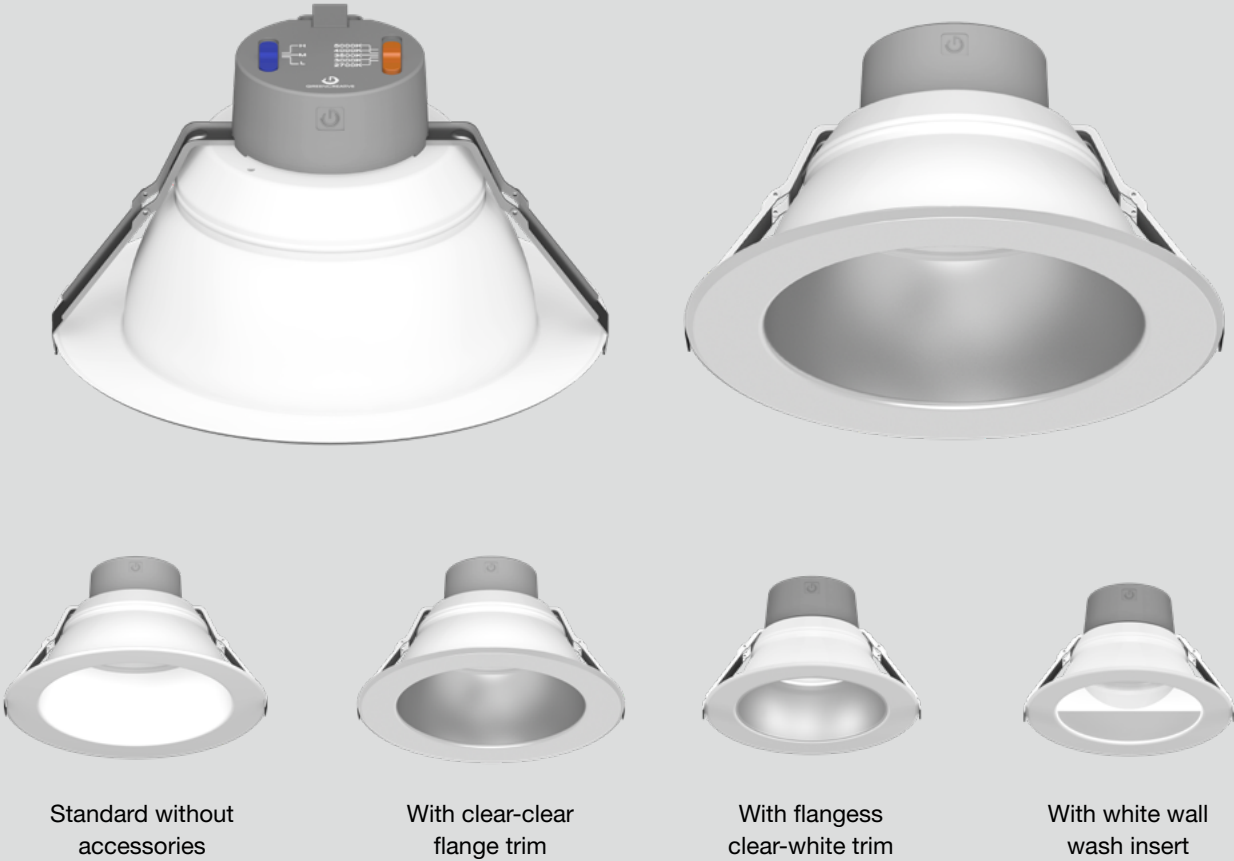

Ready For Any Dimming Protocol

All SELECTFIT products are suitable for 120-277V input and feature our DualDim technology allowing the luminaire to be dimmed with either 120V TRIAC/ELV or 0-10V controls. Taking the guesswork out of auditing an existing space and providing optimal flexibility while minimizing un-expected installation issues in the field. Whether your project is residential, commercial, mixed-use, new construction or remodel, SELECTFIT will FIT.

DualDim



The Same Quality, Durability and Simplicity

SELECTFIT features a die cast heat sink maximizing passive thermal management for high max ambient temperatures. The operating range is -40°F to 113°F (-40°C to 45°C) on all models and IC rating on most models. All models feature Wet location and certified air-tight ratings for maximum adaptability. Proprietary spring action clips enable direct installation in 1/2" to 2" ceiling thicknesses and field accessibility below the ceiling for easy install and service.



Soothing Pure Light

A smooth and uniform lighting distribution, offered with an LED binning within 3 SDCM maximum, in minimum 90 CRI, with calculated L70 of 100,000hrs+ for impeccable uniformity and incredible color rendering over the life of the SELECTFIT fixture.



SPECIFICATIONS				
Series	Size	CRI	CCT	Dimming
SLFT SELECTFIT Downlight	4 4" 900 / 750 / 600 lumens	9 CRI 90+	CCT5S Selectable CCT 2700 / 3000 / 3500 / 4000 / 5000K	DUALDIM 120V-277V, 50/60Hz. 0-10V or Forward/Reverse phase dimming at 120V only.
	6 6" 1,650 / 1,300 / 1,000 lumens			
	6HO 6" 2,900 / 2,300 / 1,750 lumens			
	8 8" 2,100 / 1,600 / 1,200 lumens			
	8HO 8" 4,200 / 3,600 / 2,900 lumens			
	9.5 9.5" 4,000 / 3,200 / 2,400 lumens			

1. This option needs to be selected for each fixture to use with NURO7/CM.





A Solution For Any Ceiling Height

With SELECTFIT you can get the right amount of light for any project. Ranging from 600lm to 4,500lm, SELECTFIT will fill any existing space. The 6" and 8" are now offered in high output versions perfectly suited for high ceilings, such as auditorium, atrium, lobby, mall, theater, cinema, hallway, train station, airport and so on. The long lifetime and superior heat dissipation, on IC or non-IC rating models, will ensure you a maintenance free installation with a fast ROI and exceptionally long lifetime.



Specify Further With Additional Accessories

SELECTFIT also offers tool-less field-installable accessories to give designers more options. The clear trim insert, wall washer, and medium Fresnel optic allow you to redesign the lighting layout according to the demands of the space. Whether you need to alter a beam angle, highlight artwork on a wall, match existing layout or optimize distribution across your application, the SELECTFIT has an attachment that can help you meet your goals.

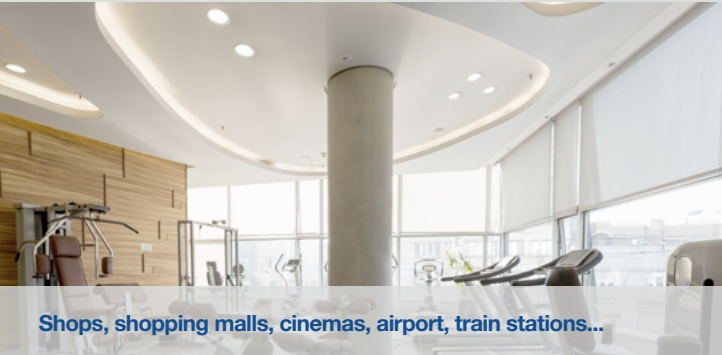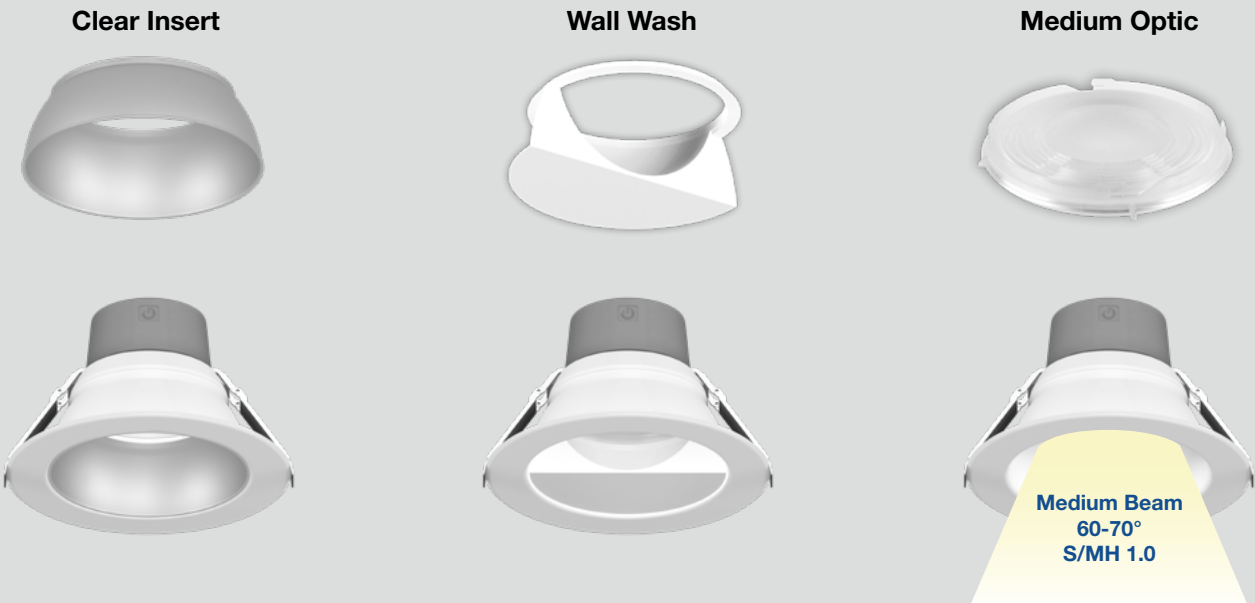


ACCESSORIES		
Product	Model	Description
37041	SLFT4/CL/TRIM	SELECTFIT G2 4" Field Installable flangeless clear trim insert (Clips inside the reflector for Clear + White flange finish)
37042	SLFT6/CL/TRIM	SELECTFIT G2 6" Field Installable flangeless clear trim insert (Clips inside the reflector for Clear + White flange finish)
37043	SLFT8/CL/TRIM	SELECTFIT G2 8" Field Installable flangeless clear trim insert (Clips inside the reflector for Clear + White flange finish)
35160	SLFT/TRIM9.5/CC	Field installable 9.5" Clear Trim and flange Insert (Attaches on the flange for Clear + Clear flange finish)
37036	SLFT4/MD/OPTIC	SELECTFIT G2 4" Field changeable Medium Optic (need to remove and replace the standard optic)
37037	SLFT6/MD/OPTIC	SELECTFIT G2 6" Field changeable Medium Optic (need to remove and replace the standard optic)
37038	SLFT8/MD/OPTIC	SELECTFIT G2 8" Field changeable Medium Optic (need to remove and replace the standard optic)
37039	SLFT4/WW/ACC	SELECTFIT G2 4" Field installable Wall Wash white insert (wall wash insert can not be combined with Trim insert)
37040	SLFT6/WW/ACC	SELECTFIT G2 6" Field installable Wall Wash white insert (wall wash insert can not be combined with Trim insert)
35121	NCFJB4	4" New Construction Frame for T-Grid ceilings and stud/joist mounting
35122	NCFJB6	6" New Construction Frame for T-Grid ceilings and stud/joist mounting
35123	NCFJB8	8" New Construction Frame for T-Grid ceilings and stud/joist mounting
35124	NCFJB9.5	9.5" New Construction Frame for T-Grid ceilings and stud/joist mounting
35126	NCFBFB	Field Installable Butterfly Brackets For New Construction Frame
35125	NCFEMB	Field Installable Brackets For emergency Driver or Inverter with New Construction Frame
98502	NCPLATE468	4", 6" and 8" New Construction Plate for Stud/Joist Mounting
98501	NCPLATE/T4689	New Construction or Remodel Plate for T-Grid Ceilings
98569	GOOFRING4	4" Goof Ring - Outer Diameter 8-1/8"
98568	GOOFRING6	6" Goof Ring - Outer Diameter 10-1/2"
98567	GOOFRING8	8" Goof Ring - Outer Diameter 12-1/2"
98566	GOOFRING9.5	9.5" Goof Ring - Outer Diameter 14-3/16"
37934	8EMINVERTER	California Title 20 Compliant 8W Emergency LED Inverter (Field Installation)
37935	21EMINVERTER	California Title 20 Compliant 21W Emergency LED Inverter (Field Installation)
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver (Field Installation)
FHUPS1-UNV-25L-SD	FHUPS1-UNV-25L-SD	25W Emergency Micro Inverter for field installation to use with 0-10V Driver options. 100-277VAC (up to 150W with use of 0-10V dimming). CEC Compliant
NURO7/CM	NURO7/CM	NUROAir Bluetooth Ceiling Mount Dual Mode Sensor
NURO-SW-3B-BA-BL-WP-V1	NURO-SW-3B-BA-BL-WP-V1	NUROAir 3-Button Bluetooth Battery Powered Wall Switch
NURO-SW-3B-BA-BL-WP-V1	NURO-SW-3B-BA-BL-WP-V1	NUROAir 5-Button Bluetooth Battery Powered Wall Switch
NURO-SW-7B-AC-BL-WP-V1	NURO-SW-7B-AC-BL-WP-V1	NUROAir 7-Button Bluetooth Line Voltage (AC 120-277V) Powered Wall Switch




Unrivaed Efficiency. Upgraded Flexibility.

Powered by SelectDrive and SelectKelvin technologies, this new and improved downlight family offers field-selectable light output and color temperature selection, to accommodate your project’s unique requirements and intended atmosphere. These features provide exceptional flexibility for contractors and installers when altering designs on the spot. Distributors also benefit from reduced processing, warehousing and logistics costs, as one product provides nine unique combinations of light output and color.

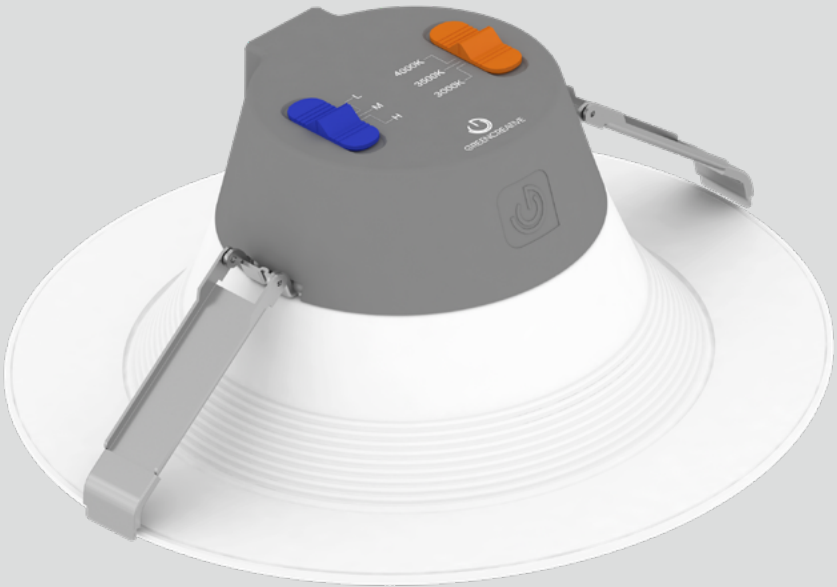

3 Lumen Levels

	Low	Med	High
4"	700lm	1050lm	1400lm
6"	1125lm	1625lm	2000lm
8"	1560lm	2080lm	3000lm
9.5"	2000lm	3000lm	3500lm

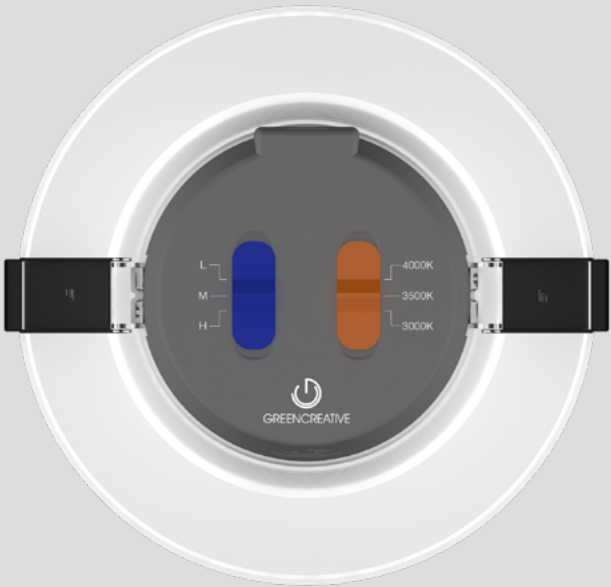

3 Color Temperatures


- 3000K Warm White
- 3500K Neutral White
- 4000K Cool White

SPECIFICATIONS				
Series	Size	CRI	CCT	Dimming
INFTP INNOFIT PLUS Downlight	4 4" 700 / 1,050 / 1,400lm	8 CRI 80+	CCT3S Selectable CCT 3000 / 3500 / 4000K	DIM010UNV 120-277V, 50/60Hz. 0-10V dimming at 120-277V.
	6 6" 1,125 / 1,625 / 2,000lm			DIM120V <sup>1</sup> 120V, 60Hz, Forward/Reverse phase dimming at 120V only.
	8 8" 1,560 / 2,080 / 3,000lm			NURO/RCM <sup>2</sup> NUROAir Ready Power Pack for Ceiling Mount Sensor
	9.5 9.5" 2,000 / 3,000 / 3,500lm			

1. DIM120V only available in 6" and 8". 2. This option needs to be selected for each fixture to use with NURO7/CM.





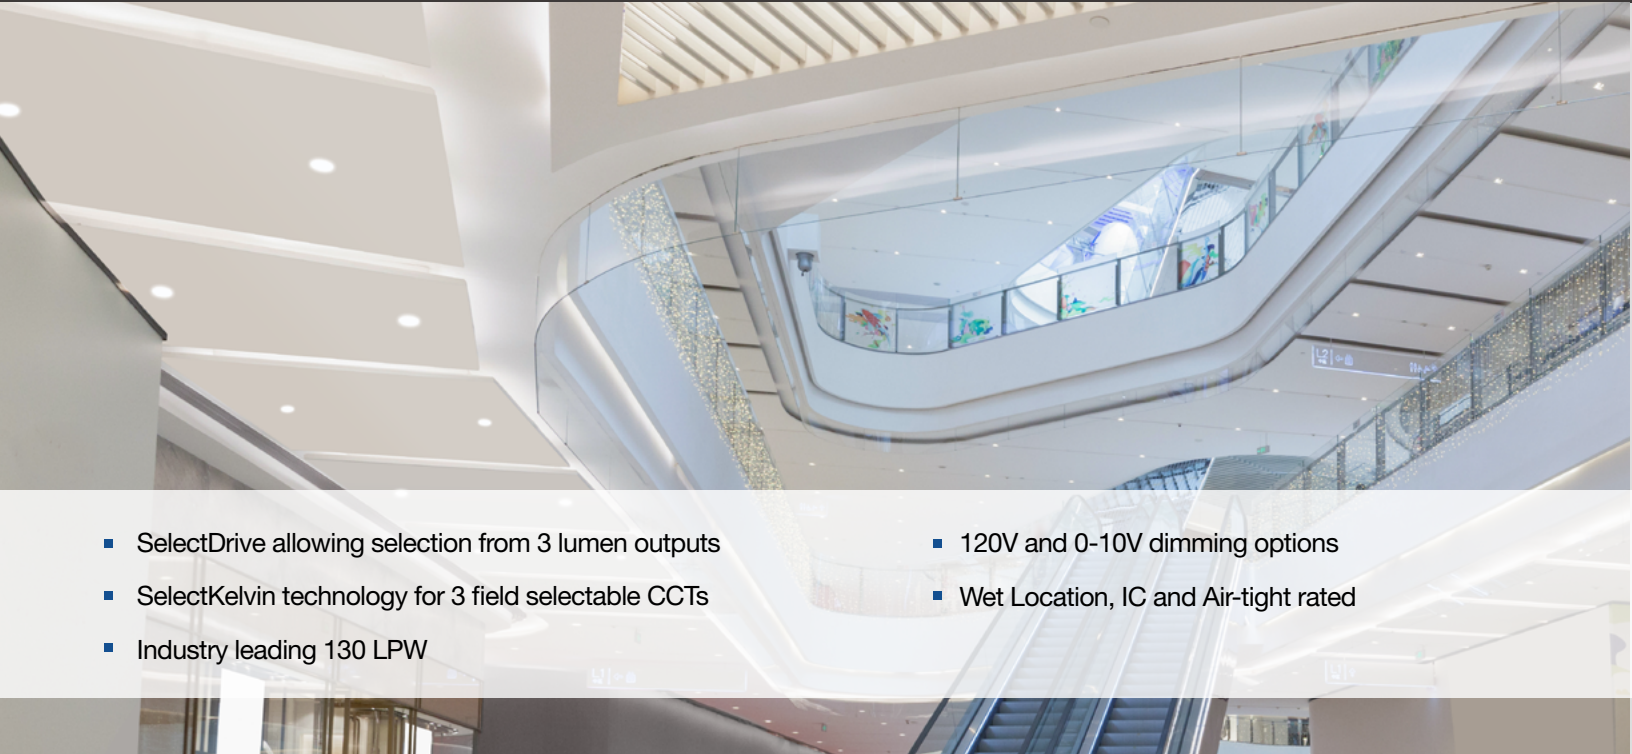

- SelectDrive allowing selection from 3 lumen outputs
- SelectKelvin technology for 3 field selectable CCTs
- Industry leading 130 LPW
- 120V and 0-10V dimming options
- Wet Location, IC and Air-tight rated

Maximum Energy Savings

The INNOFIT Plus has been engineered for efficiency without sacrificing performance. With an industry-leading efficacy of up to 130 lumens per watt, installing the INNOFIT Plus offers maximum energy savings and results in a swift ROI.

\* Fixed-CCT 6" and 8" 0-10V dimmable models also available. Consult GREEN CREATIVE for more information.



Quick ROI



Energy Savings



Low Labor Costs

Universal Compatibility

The family is available in 4", 6", 8" and 9.5" sizes with models available for either 0-10V or 120V TRIAC/ELV dimming systems. Field installable emergency back-ups are also available for emergency lighting requirements. Certified with Air-Tight, IC and Wet Location ratings, the INNOFIT Plus is the optimal choice for almost any retrofit application.



DIMMABLE



DIMMABLE




WET LOCATION



AIR TIGHT



IC RATED

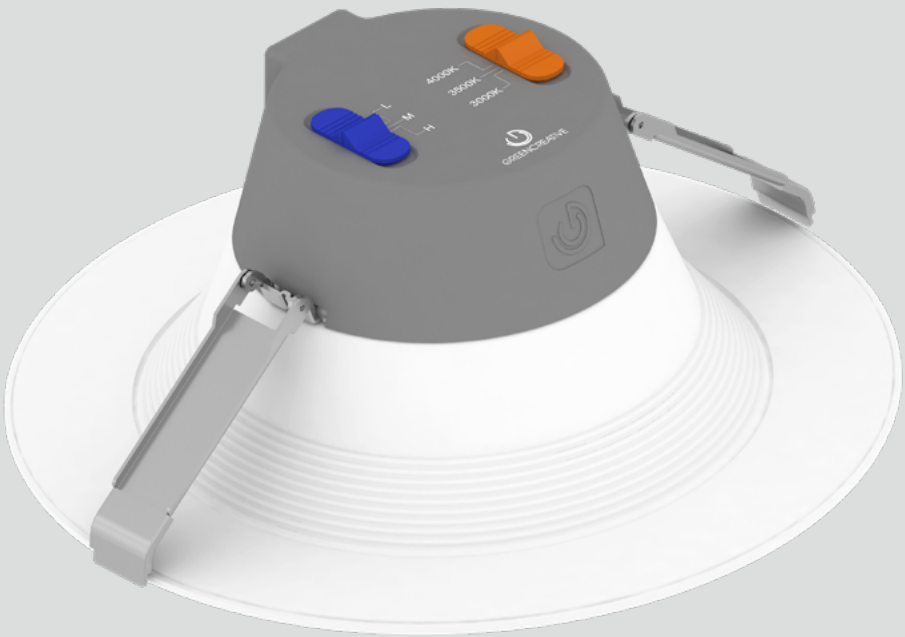

ACCESSORIES		
Product	Model	Description
35121	NCFJB4	4" New Construction Frame for T-Grid ceilings and stud/joist mounting
35122	NCFJB6	6" New Construction Frame for T-Grid ceilings and stud/joist mounting
35123	NCFJB8	8" New Construction Frame for T-Grid ceilings and stud/joist mounting
35124	NCFJB9.5	9.5" New Construction Frame for T-Grid ceilings and stud/joist mounting
35126	NCFBFB	Field Installable Butterfly Brackets For New Construction Frame
35125	NCFEMB	Field Installable Brackets For emergency Driver or Inverter with New Construction Frame
98502	NCPLATE468	4", 6" and 8" New Construction Plate for Stud/Joist Mounting
98501	NCPLATE/T4689	New Construction or Remodel Plate for T-Grid Ceilings
98569	GOOFRING4	4" Goof Ring - Outer Diameter 8-1/8"
98568	GOOFRING6	6" Goof Ring - Outer Diameter 10-1/2"
98567	GOOFRING8	8" Goof Ring - Outer Diameter 12-1/2"
98566	GOOFRING9.5	9.5" Goof Ring - Outer Diameter 14-3/16"
37934	8EMINVERTER	California Title 20 Compliant 8W Emergency LED Inverter (Field Installation)
37935	21EMINVERTER	California Title 20 Compliant 21W Emergency LED Inverter (Field Installation)
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver (Field Installation)
FHUPS1-UNV-25L-SD	FHUPS1-UNV-25L-SD	25W Emergency Micro Inverter for field installation to use with 0-10V Driver options. 100-277VAC (up to 150W with use of 0-10V dimming). CEC Compliant
NURO7/CM		NUROAir Bluetooth Ceiling Mount Dual Mode Sensor
NURO-SW-3B-BA-BL-WP-V1		NUROAir 3-Button Bluetooth Battery Powered Wall Switch
NURO-SW-3B-BA-BL-WP-V1		NUROAir 5-Button Bluetooth Battery Powered Wall Switch
NURO-SW-7B-AC-BL-WP-V1		NUROAir 7-Button Bluetooth Line Voltage (AC 120-277V) Powered Wall Switch




DualDim

Select Kelvin



Multiple Choices Exceptional Flexibility

The MULTIFIT downlight family offers multiple product choices providing exceptional flexibility for any space

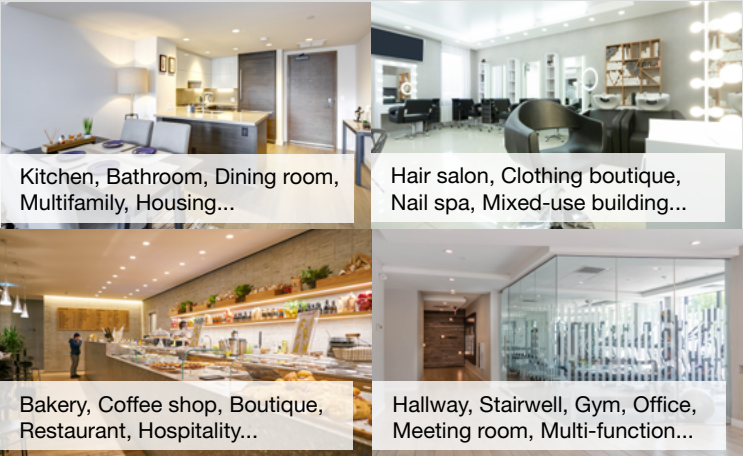

A Comprehensive Selection Of Fixtures

Flat Round Downlight (MFR)

Your classic downlight, with 1/2" baffle for glare control and a familiar style, which makes it suitable for any space.



Gimbal Round Downlight (MGR)

An adjustable downlight, for your slope ceiling, wall grazing and highlighting artwork and architectural elements by directing the light where you need it.




Cloud Round Downlight (MCR)

Trimless cloud downlight designed to add side lighting for general area lighting.



Available For Multiple Mounting Heights

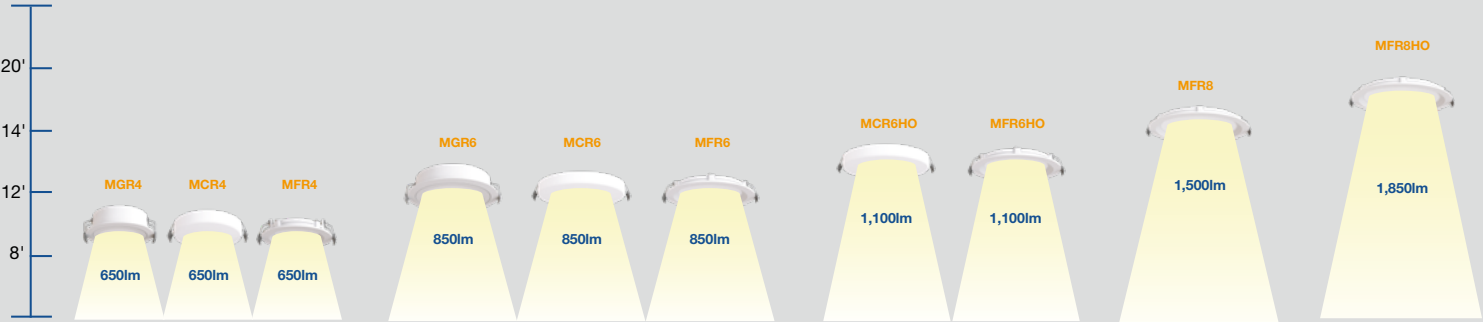

SPECIFICATIONS					
Model Series	Size	CRI	CCT	Driver	Driver Style
<b>MFR</b> MULTIFIT Round Flat	<b>4</b> 4" 600lm	<b>9</b> CRI 90+	<b>CCT5S</b> Selectable CCT 2700/3000/3500/4000/5000K	<b>DUALDIM</b> 120V-277V, 50/60Hz. 0-10V or Forward/Reverse phase dimming at 120V only.	<b>EXT</b> External driver box with quick connector
<b>MCR</b> <sup>1</sup> MULTIFIT Round Cloud	<b>6</b> 6" 800lm				
<b>MGR</b> <sup>2</sup> MULTIFIT Round Gimbal	<b>6HO</b> 6" 1,000				
	<b>8</b> 8" 1,500lm				
	<b>8HO</b> 8" 2,000lm				

<sup>1</sup> Round Cloud downlight is available in 4" 600lm, 6" 800lm, and 6" HO 1000lm only. <sup>2</sup> Round Gimbal downlight is available in 4" 600lm and 6" 800lm only.

The Right CCT For Your Project


Utilizing our SelectKelvin technology, select the CCT before, during, or after installation with just the flip of a switch. The external switch allows you set the color temperature to 2700/3000/3500/4000/5000K CCT during or even after installation to customize any application and set the right atmosphere for your space.

Ready For Any Dimming Protocol

All MULTIFIT products are suitable for 120-277V input and feature our DualDim technology allowing the luminaire to be dimmed with either TRIAC/ELV or 0-10V controls. Taking the guesswork out of auditing an existing space and providing optimal flexibility while minimizing un-expected installation issues in the field. Whether your project is residential, commercial, mixed-use, new construction or remodel, MULTIFIT allows you to use one luminaire and simplify all phases of the job from specification to ordering to installation!

Installation Made Easy

MULTIFIT fixtures install directly into the ceiling without the need for an additional J-box or recessed can. All you need is a hole in the ceiling, wire the driver and use the springs action clips to sit the fixture flush and secured in no-time.



The shallow design, along with its IC, Air-tight and Wet Location ratings, allow any MULTIFIT to install virtually anywhere.

Select Kelvin



DualDim








SPECIFICATIONS				
Series	Size	CRI	CCT	Dimming
SLMFT SLIMFT	<b>5</b> 5" 820 lumens	<b>9</b> CRI 90	<b>CCTS</b> Selectable CCT 2700K/3000K/3500K/4000K/5000K	<b>DIM120V</b> 120V Forward and Reverse Phase Dimming
	<b>7</b> 7" 1,000 lumens			<b>DIM010UNV</b> Universal 120-277V, 0-10V dimming
	<b>9</b> 9" 1,250 lumens			
ACCESSORIES				
Product	Model	Description		
38409	SLMFT/ACC/4CAN	4" Can Installation Accessories		
38410	SLMFT/ACC/56CAN	5/6" Can Installation Accessories		
37934	8EMINVERTER	California Title 20 Compliant 8W Emergency LED Inverter (Field Installation)		
37935	21EMINVERTER	California Title 20 Compliant 21W Emergency LED Inverter (Field Installation)		
38096	24EMINVERTER	California Title 20 Compliant 24W Emergency LED Inverter (Field Installation)		
FHUPS1-UNV-25L-SD	FHUPS1-UNV-25L-SD	25W Emergency Micro Inverter for field installation to use with 0-10V Driver options. 100-277VAC (up to 150W with use of 0-10V dimming). CEC Compliant		


5 Selectable Color Temperatures

SelectKelvin technology enables easy selection of five color temperatures from 2700K, 3000K, 3500K, 4000K and 5000K in the field, creating customized ambience and adapting to the mood of the space with just the flip of a switch.




Installation

Two installation options: direct mount in new construction with a 4" junction box or retrofit into existing recessed housings.

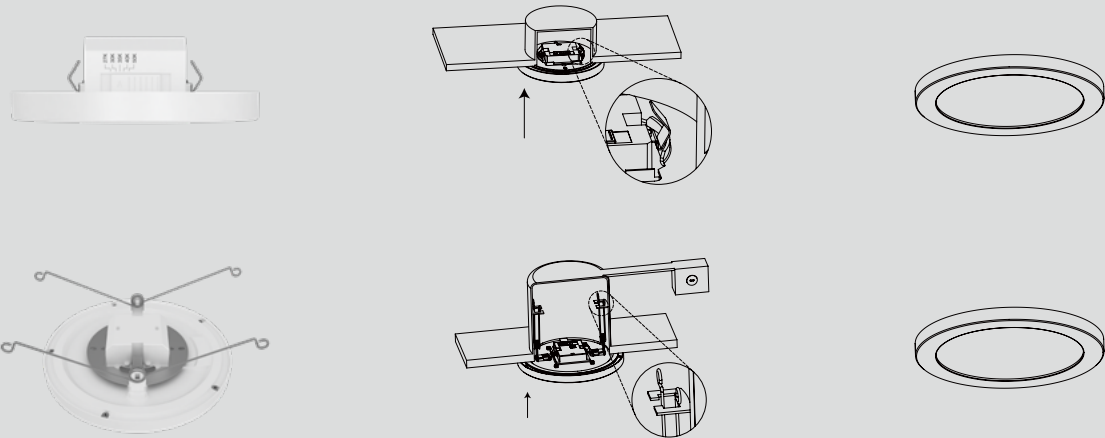

Field Selectable CCT with SelectKelvin Technology

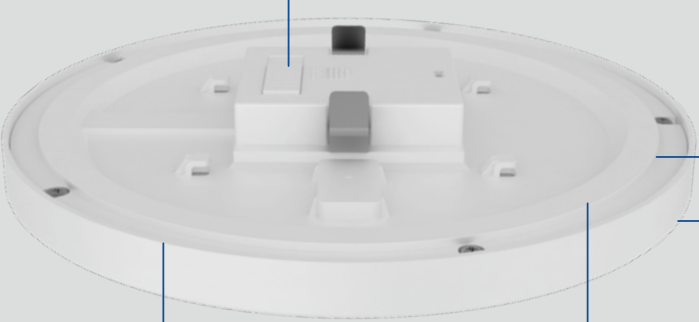

0.55" thickness from below the ceiling



120V Forward and Reverse Phase or 120-277V 0-10V dimming options

Gasketed to provide Air-Tight and Wet Location Ratings




SlimDisk



5 Selectable Color Temperatures


SelectKelvin technology enables easy selection of five color temperatures from 2700K, 3000K, 3500K, 4000K and 5000K in the field, creating customized ambience and adapting to the mood of the space with just the flip of a switch.

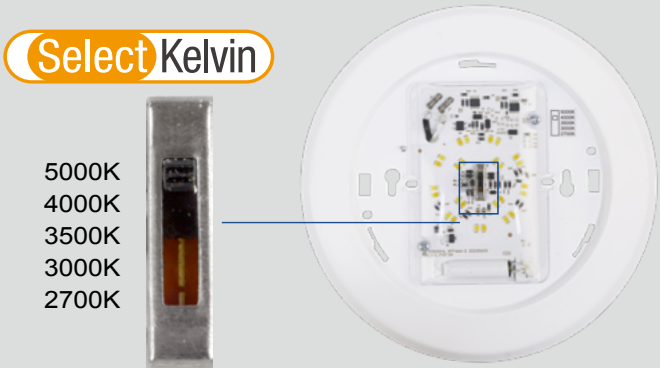

2700K  
SOFT WHITE LIGHT



3000K  
WARM WHITE LIGHT



3500K  
NEUTRAL WHITE LIGHT



4000K  
COOL WHITE LIGHT



5000K  
DAY LIGHT

SPECIFICATIONS				
Model Series	Size	CRI	CCT	Dimming
SDSK Slim Disk	6 6"	8 80+ CRI	CCT3S Selectable CCT 2700 / 3000 / 3500 / 4000 / 5000K	DIM120V 120V Forward/Reverse Phase dimming

Easy Installation with Twist Lock Diffuser

SlimDisk is designed for easy installation and mounting to standard 4" junction boxes or 5-6" recessed can housings. Its twist-lock diffuser design simplifies and speeds up both installation and light selection in the field.





# NOVA WALL WASH TRACK LIGHT

NOVA

Select Drive

Select Kelvin

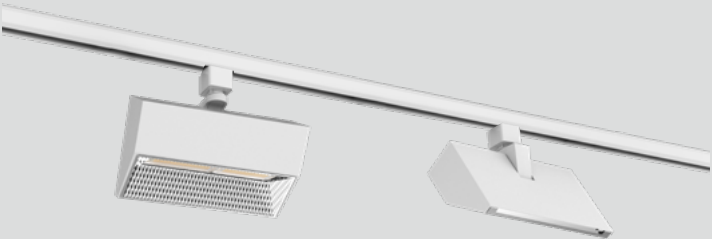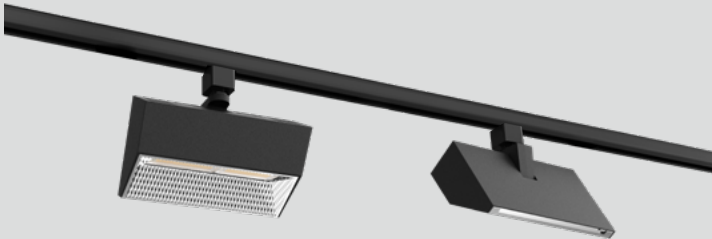


### NOVA Wall Wash Track Head

A versatile wall wash track that simplifies specifications by incorporating all settings into a single SKU while ensuring uniform, wide, and precise illumination.

### Top-To-Bottom Wide and Uniform Lighting


Designed with cutting-edge optics and a faceted reflector, NOVA provides wide and uniform lighting across expansive surfaces from top to bottom, maximizing the illuminated area with reduced number of fixture installed.

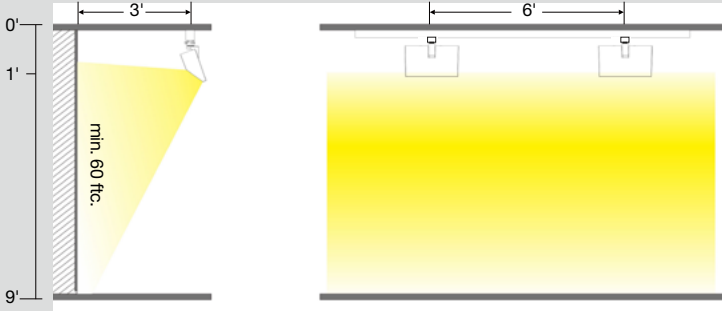

### Effortless Field Selectability

Designed with integral power and CCT switches, NOVA allows for field selection of three lumen levels ranging from 3,000lm to 5,000lm with up to 100lm/W efficacy, and three color temperatures from 3000K, 3500K, and 4000K with high CRI 90 for crisp light and superior color accuracy. Specification for right light output and color is at your fingertips directly in the field.

SPECIFICATIONS					
Series	CRI	CCT	Driver	Adapter	Finish
<b>NOVT</b> NOVA Wall Wash Track	<b>9</b> 90+ CRI	<b>CCTS</b> Selectable CCT 3000 / 3500 / 4000K	<b>DIM120V/UNV</b> 120V, 50/60 Hz, Forward and Reverse Phase Line Voltage Dimming to 5%	<b>J</b> GC and Juno type	<b>WH</b> White
				<b>H</b> Halo Type adapter	<b>BL</b> Black
				<b>L</b> Lightolier Type adapter	

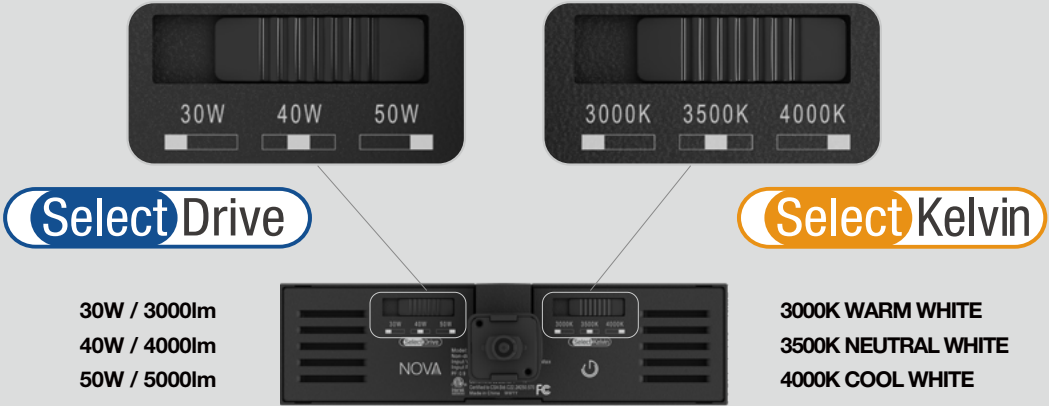




### Fewer Head Count, Refine Space

NOVA provides ample and uniform lighting using fewer fixtures due to its broad light distribution and impressive footcandles. With a spacing range of up to 6 feet between fixtures and 3 feet from the wall, your entire area remains brightly illuminated, ensuring a minimum of 60 footcandles on the wall and an even distribution of light from 1 to 9 feet from the ceiling, even between fixtures. Achieve a refined ambiance with a ‘silent ceiling’ effect, immersing your space with vibrant illumination.

### Precise and Convenient Light Adjustment

NOVA is engineered with 360° rotating head and 90° pivot design, with assisting light articulation indicators on the arm of the track head, free and precise aiming of the light towards where needed become a breeze.

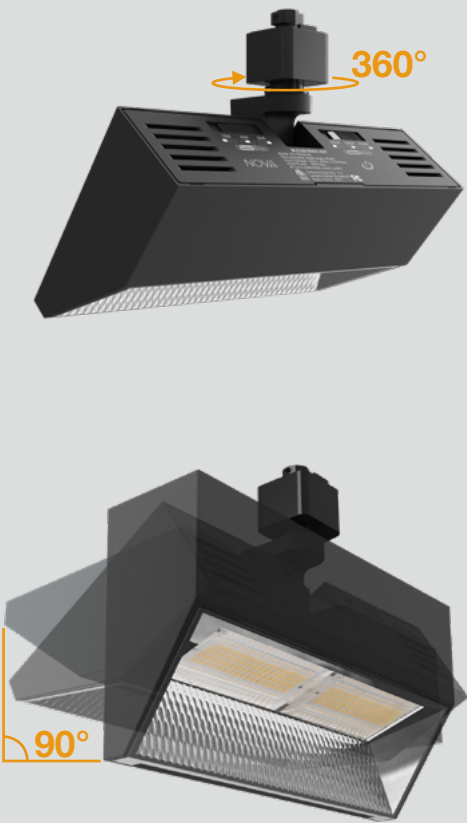


### Complementary Design


The sleek and compact design enables NOVA seamlessly blending into any environment, either installed alone, or work in combination with our ORBIT track and PXCYL cylinder track which designed in the same sleek and contemporary style, for achieving more diversified aesthetics and illumination effect.








H-Type



J-Type




L-Type



Canopy Mount

MULTIPLE SYSTEM

H, J, & L track head adapters are available to accommodate the most common track systems. Canopy mounts are ETL listed to be mounted to either ceiling or wall mounted j-boxes, offering design flexibility and consistency.

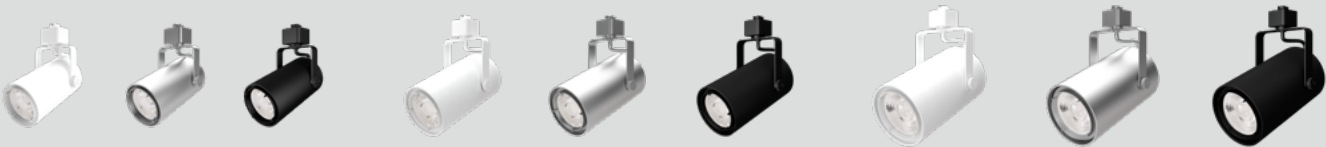

FIELD SELECTABLE LUMEN

ORBIT track features SelectDrive technology, for field selectable lumen output.





FIELD CHANGEABLE TIR OPTICS

Wide range of field interchangeable polycarbonate TIR optics, for clean and smooth beam control, Spot 15°, Narrow Flood 25° and Flood 35° available for each size.

FULL ACCESSORY SUITE

The ORBIT family is available with a variety of accessories in matching color finishes. The wall wash, snoot and barn doors snap on to the front of the fixture and can be used in conjunction with GREEN CREATIVE filters and lenses.

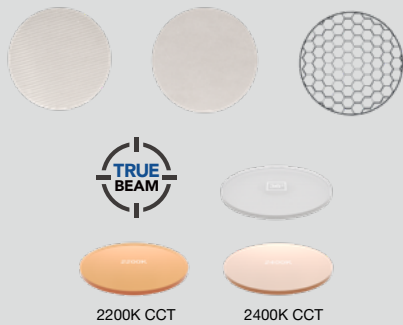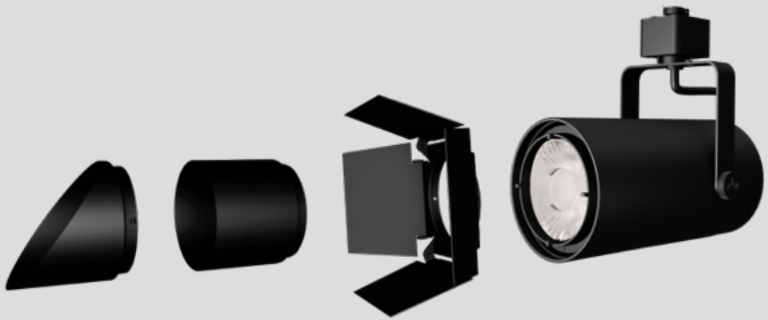

MEDIA, COLOR FILTERS, LENSES

Define, refine and dramatize your lighting design with media and lenses. Use the Honeycomb, Linear Spread and Solite lenses to reduce glare, spread and soften the edges of any lighting design. Use the Square lenses for highlighting specific painting or architectural details. Use the CCT shifting lenses for unparalleled warmer colors (2400K and 2200K), creating welcoming environments for your most ambitious projects.

SPECIFICATIONS							
Series	Output	CRI	CCT	Beam Angle	Driver	Adapter	Finish
ORB Orbit Series	<b>S</b> Small 700 / 1,000 lumens	9 90+ CRI	27 2700K	<b>SP</b> Spot 15°	<b>DIM120V</b> 120V, 50/60 Hz, Forward and Reverse Phase Line Voltage Dimming to 5%	<b>H</b> Halo	<b>BL</b> Black
	<b>M</b> Medium 1,500 / 2,000 lumens		30 3000K	<b>NR</b> Narrow 25°		<b>J</b> Juno	<b>WH</b> White
	<b>L</b> Large 3,000 / 4,000 lumens		35 3500K	<b>FL</b> Flood 35°		<b>L</b> Lightolier	<b>W</b> Silver
			40 4000K			<b>CM</b> Canopy Mount	

ACCESSORY ORDERING INFORMATION				
Model Series	Type	Size	Product	Color
ORB Orbit Series	ACC Accessories	S Small	<b>SN</b> Snoot	<b>WH</b> White
			<b>M</b> Medium	<b>WW</b> Wall Wash
		L Large	<b>BD</b> Barn Door	<b>BL</b> Black
			<b>HC¹</b> Honey Comb	

¹HC No need to select color for HC.

OPTIC ORDERING INFORMATION			
Model Series	Type	Size	Beam Angle
ORB Orbit Series	OPT Optical Lens	<b>S</b> Small	<b>SP</b> Spot 15°
		<b>M</b> Medium	<b>NR</b> Narrow 25°
		<b>L</b> Large	<b>FL</b> Flood 35°

MEDIA ORDERING INFORMATION			
Model Series	Type	Size	Product
ORB Orbit Series	LENS Lens	<b>S</b> Small	<b>LS</b> Linear Spread
		<b>M</b> Medium	<b>SOL</b> Solite
		<b>L</b> Large	<b>SQ3636</b> Square Lens 36°
			<b>CCT22</b> CCT Shift Lens 2700K to 2200K
			<b>CCT24</b> CCT Shift Lens 2700K to 2400K



SPECIFICATIONS							
Series	Output	CRI	CCT	Beam Angle	Driver	Adapter	Finish
ATM Atom Track Series	6 650 lumens	9 90+ CRI	27 2700K	NR Narrow 25°	DIM120V 120V, 50/60 Hz, Forward and Reverse Phase Line Voltage Dimming to 10%	H Halo	B Matte Black
	10 1,050 lumens		30 3000K	FL Flood 35°		J Juno	W Matte White
			35 3500K			L Lightolier	
			40 4000K			CM Canopy Mount	

The Atom Track offers industry-leading performance in a versatile, compact fixture. With your choice of color temperature, lumen output, track adapter, beam angle, and fixture color, you can tailor this track light to any application. The Atom Track’s modular design makes it fully customizable, allowing you to easily make in-field upgrades to the light engine or lens. Snap-on accessories offer even more options, giving you flexibility and variety to your lighting project.

TRACK MOUNT

H, J and L track adapters accommodate most track systems

90CRI, 2700K, 3000K, 3500K, 4000K CCT

650 & 1,050 lumens options

CANOPY MOUNT

25° Narrow & 35° Flood Beam Angles

Matte White & Matte Black finishes match existing track systems

TRUE BEAM

Easy to install snap-on accessories, including wall wash, snoot, honeycomb louver, color shift and square distribution lenses.

- Compact form factor with industry-leading performance
- Meets CA Title 24 requirements
- H, J, L, and Canopy Mount adapters available
- Easy to install, snap-on accessories available

ACCESSORIES		
Product	Model	Description
35037	ATM/A/SN/WH	Snoot: Matte White
35038	ATM/A/SN/BL	Snoot: Matte Black
35040	ATM/A/HC/WH	Honeycomb Louver: Matte White Ring
35041	ATM/A/HC/BL	Honeycomb Louver: Matte Black Ring
35043	ATM/A/WW/WH	Wall Wash: Matte White
35044	ATM/A/WW/BL	Wall Wash: Matte Black
35811	MR/ACC/RED	Shift lens Red
35812	MR/ACC/GRE	Shift lens Green
35813	MR/ACC/BLE	Shift lens Blue
35814	MR/ACC/YLW	Shift lens Yellow
36915	ORB/LENS/M/CCT22	Medium - CCT Shift Lens 2700K to 2200K
36916	ORB/LENS/M/CCT24	Medium - CCT Shift Lens 2700K to 2400K
35818	MR/ACC/SQ2525	Square distribution lens 25°
35819	MR/ACC/SQ3636	Square distribution lens 36°



Versatile Sizes and Finishes

SOL Gimbal Track Head is designed to fit lamps in PAR20, PAR30 short neck and PAR38 form factors. Choose from white or black finishes to effortlessly match your decor style.


The E26 medium screw base design ensures simple installation and removal. It's designed to be future-proof, allowing for upgrades and maintenance, giving you peace of mind that your fixture will endure the test of time.



Maximum Horizontal and Vertical Swivel

Featuring its 2-plane gimbal design, the SOL Gimbal series allows for maximum horizontal and vertical swivel, enabling precise aiming and adding a touch of elegance to any environment.

Equipped with an E26 medium base and compatible with both H-Type and J-Type adapters, it seamlessly integrates with a variety of Track Rails.

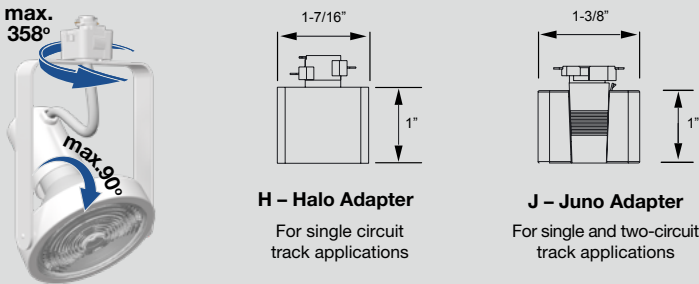

SPECIFICATIONS					
Series	Track Style	Lamp Type	Lamp base	Adapter	Finish
SOL SOL TRACK HEAD SERIES	GR Gimbal Ring	PAR20 PAR20 Ready	E26 E26 lamp base socket adapter	J GC and Juno type	WH White
		PAR30 PAR30 Ready		H Halo Type adapter	BL Black
		PAR38 PAR38 Ready			


Perfect Companion with GREEN CREATIVE PAR Lamps

SOL Gimbal Track Heads are designed as perfect companion with GREEN CREATIVE PAR lamps tailored for your specific lighting requirements. REFINE PAR lamps series deliver superior light performance with best color accuracy and efficiency. The AdjustaPAR lamps series offers optimal flexibility for adjusting color temperature and beam angle in the field. Value Select PAR lamps series brings best value solution for everyday contractor projects.





SINGLE CIRCUIT J-TYPE TRACK SYSTEM

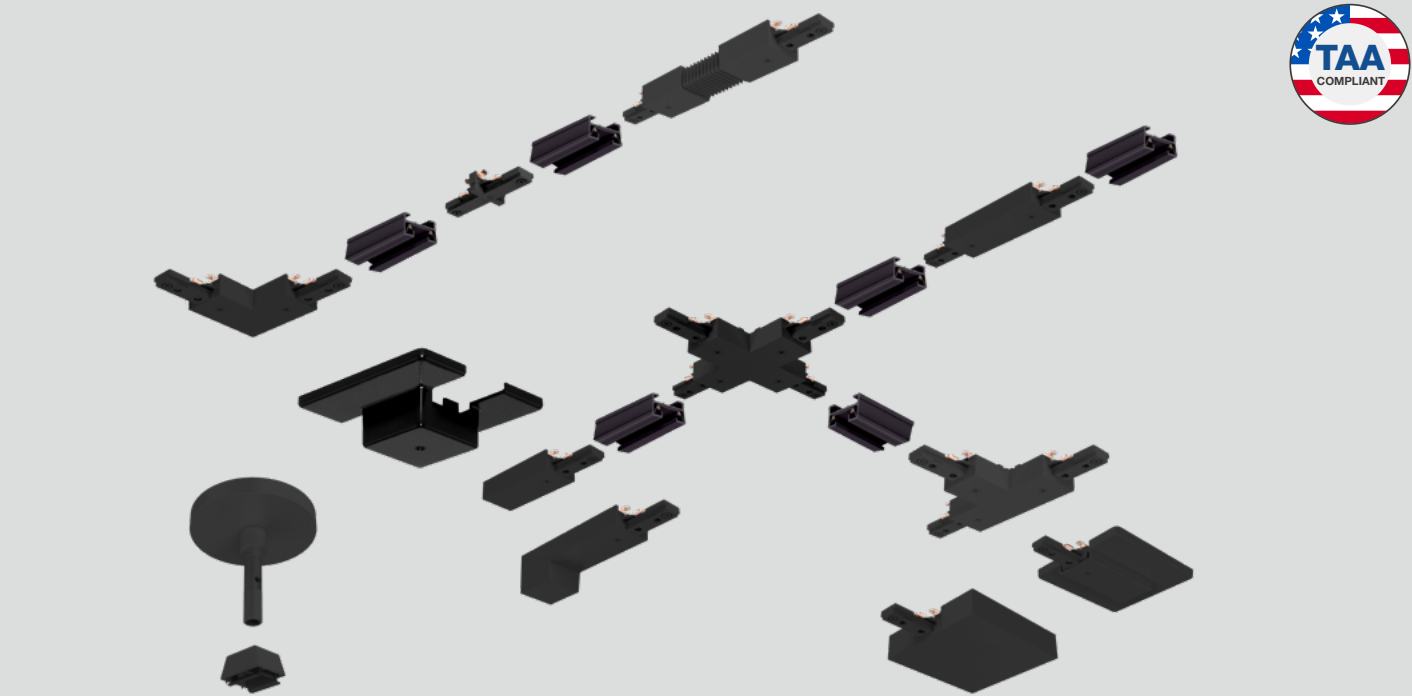

- Extruded aluminum, “ I-Beam” design construction for strength and rigidity
- Available standard in 24”, 48” and 96” lengths
- Field-cuttable for custom lengths
- Black, white and silver finishes available
- Rated for 20A at 120V, 60Hz. Maximum power rating is 2.4 kW
- Surface, cable or pendant installation options
- Mechanical polarity with a visual indicator simplifies installation
- All track system components are cULus listed for dry location
- Use with GREEN CREATIVE ATOM and ORBIT track fixtures
- Compatible with all J-Type track heads



GREEN CREATIVE Single Circuit J-Type Track System is compatible with all GREEN CREATIVE Track Fixtures with J-type adapter, including the ATOM and ORBIT track lines.

SPECIFICATIONS			
Series	Length	Circuit	Finish
TRKJ Track J-type	24 24in. (2ft) Length	1C Single Circuit	BL Black
	48 48in. (4ft) Length		WH White
	96 96in. (8ft) Length		SV Silver

POWER FEEDS			
Series	Type	Circuit	Finish
TRKJ Track J-type	ENDF Live End Feed	1C Single Circuit	BL Black
	SCF Surface Conduit Feed		WH White
	ENDFCOV End Feed with Cover		SV Silver
	FCPY Floating Canopy Feed		
	TBENDF T-Bar End Feed		
	END End Cap		

CONNECTORS			
Series	Type	Circuit	Finish
TRKJ Track J-type	MIC Mini I Connector	1C Single Circuit	BL Black
	IC I Connector		WH White
	IFC I Flex Connector		SV Silver
	LC L Connector		
	TC T Connector		
	TCR T Connector Reverse Polarity		
	XC X Connector		

MOUNTING AND SUSPENSION			
Series	Type	Circuit	Finish
TRKJ Track J-type	STCPY Stem Canopy	1C Single Circuit	BL Black
	STEMSLOPECPY Stem Slope Ceiling Canopy		WH White
			SV Silver
Series	IPS	Type	Finish
STEM	1-4 1/4" IPS	*	BL Black
	1-4COUPLING* 1/4" IPS Stem Coupling Extender		WH White
			24 24" long
			36 36" long
			48 48" long

\*No length for coupling extender


Series	Type	Finish
TRK Track	SWIRCOV Wire Way Cover	BL Black
	COVPLATE Square cover plate	WH White
		SV Silver
Series	Type	
TRK Track	TBMOUNTCLIP Slide-on T-bar mounting clip	



GREENCREATIVE

**Your Partner for Professional Lighting Solutions**

2025 H1



**Tel / Fax: (866) 774-5433**

**info@greencreative.com**

**www.greencreative.com**



/ GREENCREATIVELED



/ GClightingLED



/ GREEN-CREATIVE



An ILLUMUS Brand

[www.ILLUMUS.com](http://www.ILLUMUS.com)