

## LM-79-19 TEST REPORT

for

### GREEN CREATIVE LTD

Room 3603, Level 36, Tower 1, Enterprise Square Five, 38 Wang Chiu Road, Kowloon Bay, KL,  
Hong Kong

### LED Lamp

**Model: 4.5FSE53DIM/818/GS**

### Laboratory: Leading Testing Laboratories

NVLAP CODE: 200960-0

3rd Floor, Bld. 2, NO. 96 Longchuanwu Rd Qianjiang Economy Dev. Zone, YuhangDist,  
Hangzhou, Zhejiang Province, China 311100

Tel: +86571 86376106

www.ltlqa.com

Report No.: HZ23020012ab

The laboratory that conducted the testing detailed in this report has been accredited for SSL by NVLAP.

Review by:



Engineer: April Zou  
Mar. 08, 2023

Approved by:



Manager: Jim Zhang  
Mar. 08, 2023

Note: This report does not imply product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## TEST SUMMARY

Sample Tested: 4.5FSE53DIM/818/GS

Luminous Efficacy (Lumens /Watt)	Total Luminous Flux (Lumens)	Power (Watts)	Power Factor
28.6	116.2	4.07	0.7463
CCT (K)	CRI	Stabilization Time (Light & Power)	
1790	86.2	50	

Table 1: Executive Data Summary

Note: The above results are recorded/ derived from measurements made using an Integrating Sphere.

### Test specifications:

<b>Date of Receipt</b>	: Feb. 09, 2023
<b>Date of Test</b>	: Mar. 01, 2023
<b>Test item</b>	: Total Luminous Flux, Luminous Distribution Intensity, Luminous Efficacy, Correlated Color Temperature, Color Rendering Index, Chromaticity Coordinate, Electrical parameters
<b>Reference Standard</b>	: IESNA LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products ANSI/IES TM-30-18 IES Method for Evaluating Light Source Color Rendition

## TABLE OF CONTENT

LM-79-19 TEST REPORT.....	1
TEST SUMMARY .....	2
SAMPLE PHOTO .....	4
TEST RESULTS .....	5
Sphere-Spectroradiometer Method.....	5
Goniophotometer Method .....	6
Spectral Power Distribution - Sphere Spectroradiometer Method .....	7
Chromaticity Diagram - Sphere Spectroradiometer Method.....	8
Nominal CCT Quadrangles – Sphere Spectroradiometer Method .....	9
Color Rendition Report – Sphere Spectroradiometer Method .....	10
Zonal Lumen Tabulation- Goniophotometer Method .....	11
Illuminance Plots- Goniophotometer Method .....	12
Luminous Intensity Distribution Plots- Goniophotometer Method.....	13
Luminous Intensity Data- Goniophotometer Method .....	14
EQUIPMENT LIST .....	15
TEST METHODS .....	15
Seasoning of SSL Product.....	15
Sphere-Spectroradiometer Method- Photometric and Electrical Measurements.....	15
Goniophotometer Method .....	16
Photometric and Electrical Measurements .....	16
Color Characteristics Measurements.....	16

## SAMPLE PHOTO



Figure 1- Overview of the sample

### Equipment Under Test(EUT)

<b>Name</b>	: LED Lamp
<b>Model</b>	: 4.5FSE53DIM/818/GS
<b>Electrical Ratings</b>	: 120V, 60Hz,4.5W
<b>Product Description</b>	: 1800K
<b>Manufacturer</b>	: GREEN CREATIVE LTD
<b>Address</b>	: Room 3603, Level 36, Tower 1, Enterprise Square Five, 38 Wang Chiu Road, Kowloon Bay, KL, Hong Kong

## TEST RESULTS

Test ambient temperature was 26.0°C.

Base orientation was base up. Test was conducted without a dimmer in the circuit.

The stabilization time of the sample was 50 minutes, and the total operating time including stabilization was 55 minutes.

### Sphere-Spectroradiometer Method

Parameter	Result
Test Voltage (V)	120.0
Voltage frequency (Hz)	60
Test Current (A)	0.045
Power Factor	0.7463
Test Power (W)	4.07
THD A%	65.67
Luminous Efficacy (lm/W)	28.6
Total Luminous Flux (lm)	116.2
Color Rendering Index (CRI)	86.2
R9	30.5
Correlated Color Temperature (CCT)(K)	1790
Chromaticity Chroma x	0.5491
Chromaticity Chroma y	0.4064
Chromaticity Chroma u	0.3240
Chromaticity Chroma v	0.3597
Duv	0.0008
Chromaticity Chroma u'	0.3240
Chromaticity Chroma v'	0.5396

Special Color Rendering Indices	
R1	88.4
R2	98.5
R3	89.2
R4	88.4
R5	91.1
R6	92.2
R7	79.8
R8	62.1
R9	30.5
R10	99
R11	95.9
R12	87.4
R13	91.7
R14	95.1

Table 2: Test data per Sphere-Spectroradiometer Method

Note: According to CIE 1976 ( $u', v'$ ) diagram,  $u' = u = 4x/(-2x+12y+3)$ ,  $v' = 3v/2 = 9y/(-2x+12y+3)$ .

### Goniophotometer Method

Test ambient temperature was 24.8°C.

The photometric distance is 2.47 m.

Luminous data was taken at 0.5°vertical intervals and 10°horizontal intervals.

Parameter	Result
Test Voltage (V)	120.0
Voltage frequency (Hz)	60
Test Current (A)	0.045
Power Factor	0.7564
Power (W)	4.08
Luminous Efficacy (lm/W)	28.9
Total Luminous Flux (lm)	117.7
Beam Angle (°)	161.7
Center Beam Candle Power (cd)	19.3
Maximum Beam Candle Power (cd)	25.47 (At: C=157.5, Gamma=27.5)
Spacing Criteria	1.75 (0°-180°) / 1.78 (90°-270°)
Zonal Lumens in the 0°-60°Zone	58.09%
Zonal Lumens in the 60°-90°Zone	32.29%
Zonal Lumens in the 90°-120°Zone	7.88%
Zonal Lumens in the 120°-180°Zone	1.74%

Table 3: Test data per Goniophotometer Method

**Spectral Power Distribution - Sphere Spectroradiometer Method**


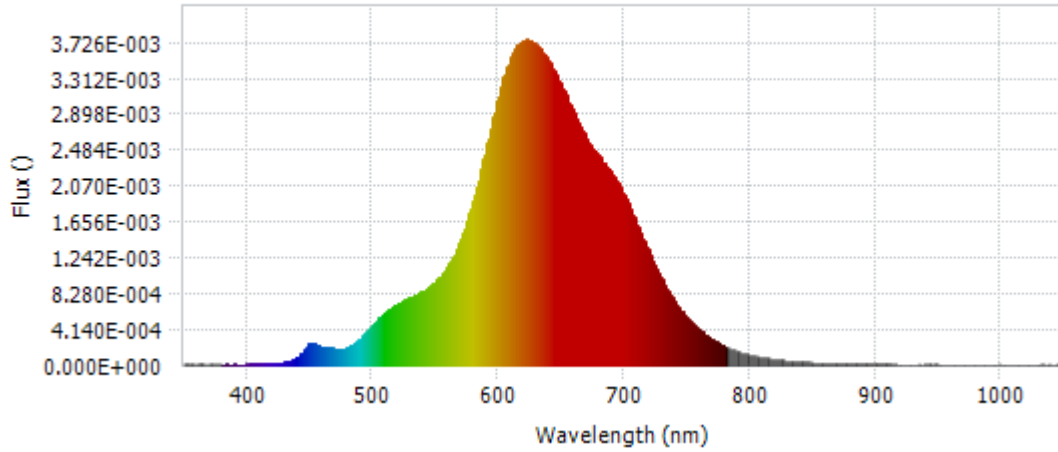


Chart 1: Spectral Power Distribution

Spectral Distribution over Visible Wavelength							
WL(nm)	Radiant(Watts)	WL(nm)	Radiant(Watts)	WL(nm)	Radiant(Watts)	WL(nm)	Radiant(Watts)
380	3.59E-06	485	2.40E-04	590	2.50E-03	695	2.10E-03
385	3.54E-06	490	3.00E-04	595	2.80E-03	700	1.95E-03
390	5.03E-06	495	3.80E-04	600	3.10E-03	705	1.80E-03
395	3.03E-06	500	4.62E-04	605	3.35E-03	710	1.62E-03
400	4.31E-06	505	5.42E-04	610	3.55E-03	715	1.45E-03
405	5.43E-06	510	6.02E-04	615	3.69E-03	720	1.29E-03
410	7.56E-06	515	6.66E-04	620	3.74E-03	725	1.12E-03
415	9.22E-06	520	7.04E-04	625	3.74E-03	730	9.82E-04
420	1.48E-05	525	7.41E-04	630	3.69E-03	735	8.45E-04
425	2.00E-05	530	7.81E-04	635	3.61E-03	740	7.25E-04
430	3.02E-05	535	8.13E-04	640	3.52E-03	745	6.28E-04
435	4.70E-05	540	8.49E-04	645	3.37E-03	750	5.40E-04
440	8.60E-05	545	9.03E-04	650	3.22E-03	755	4.64E-04
445	1.61E-04	550	9.58E-04	655	3.08E-03	760	4.00E-04
450	2.50E-04	555	1.04E-03	660	2.91E-03	765	3.39E-04
455	2.35E-04	560	1.14E-03	665	2.76E-03	770	2.91E-04
460	1.96E-04	565	1.27E-03	670	2.60E-03	775	2.49E-04
465	1.98E-04	570	1.44E-03	675	2.50E-03	780	2.13E-04
470	1.84E-04	575	1.65E-03	680	2.40E-03		
475	1.74E-04	580	1.90E-03	685	2.32E-03		
480	1.99E-04	585	2.19E-03	690	2.21E-03		

Table 4: Spectral Power Distribution Numerical Data per Sphere - Spectroradiometer Method

**Chromaticity Diagram - Sphere Spectroradiometer Method**

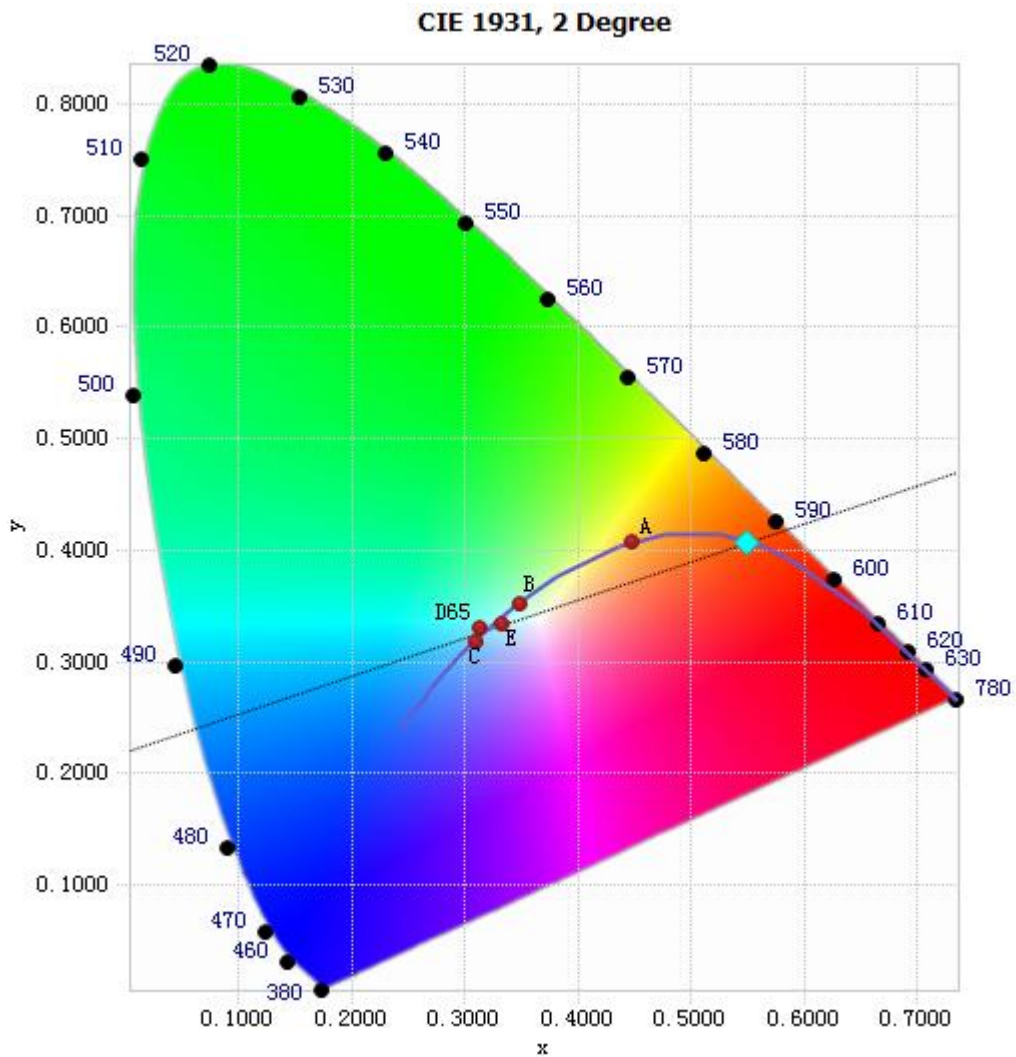

Tristimulus values(x, y): (0.5491, 0.4064)

Chart 2: Chromaticity Diagram per Sphere - Spectroradiometer Method

Note: The location on the diagram of the tristimulus coordinates are indicated by the blue diamond.



Nominal CCT Quadrangles – Sphere Spectroradiometer Method

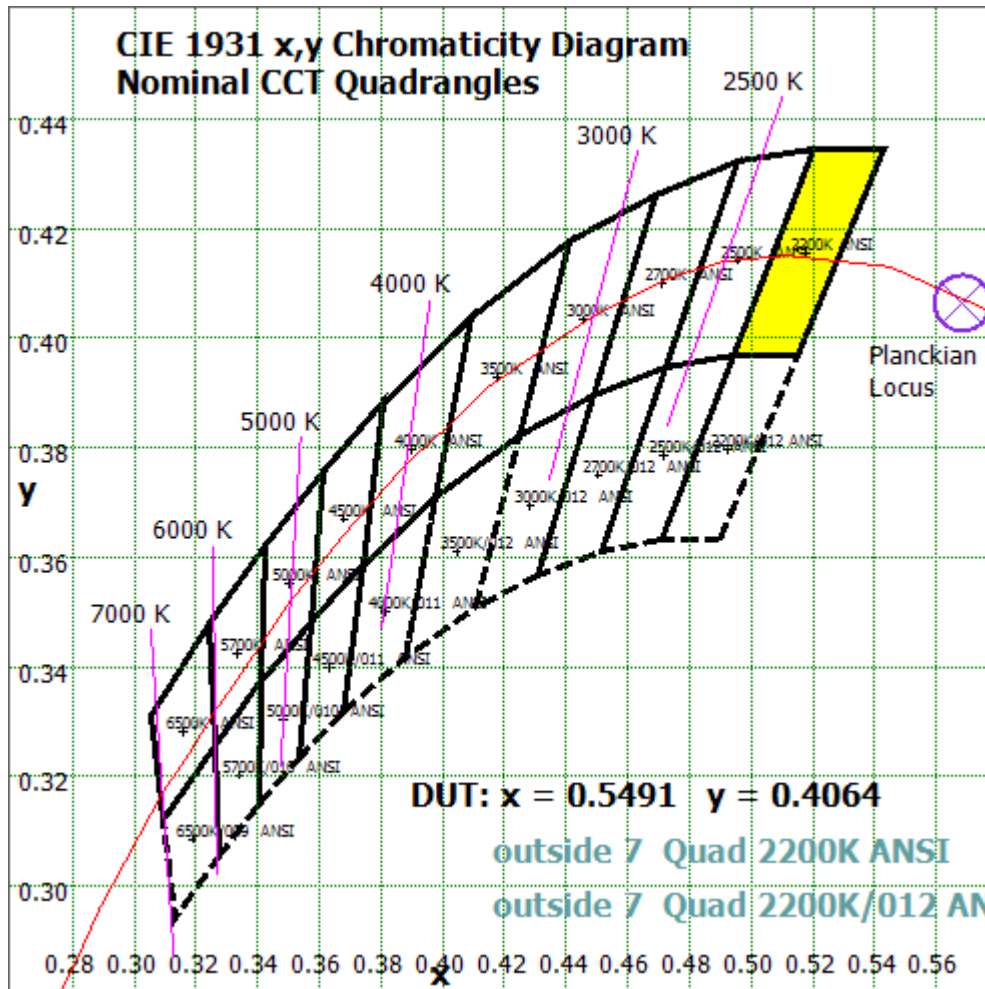


Chart 3: Plot of Lamp x/y coordinates on CIE 1931 Chromaticity Diagram

Color Rendition Report – Sphere Spectroradiometer Method


### ANSI/IES TM-30-18 Color Rendition Report

Source: LED

Manufacturer: GREEN CREATIVE LTD

Date: 2023/03/01

Model: 4.5FSE53DIM/818/GS

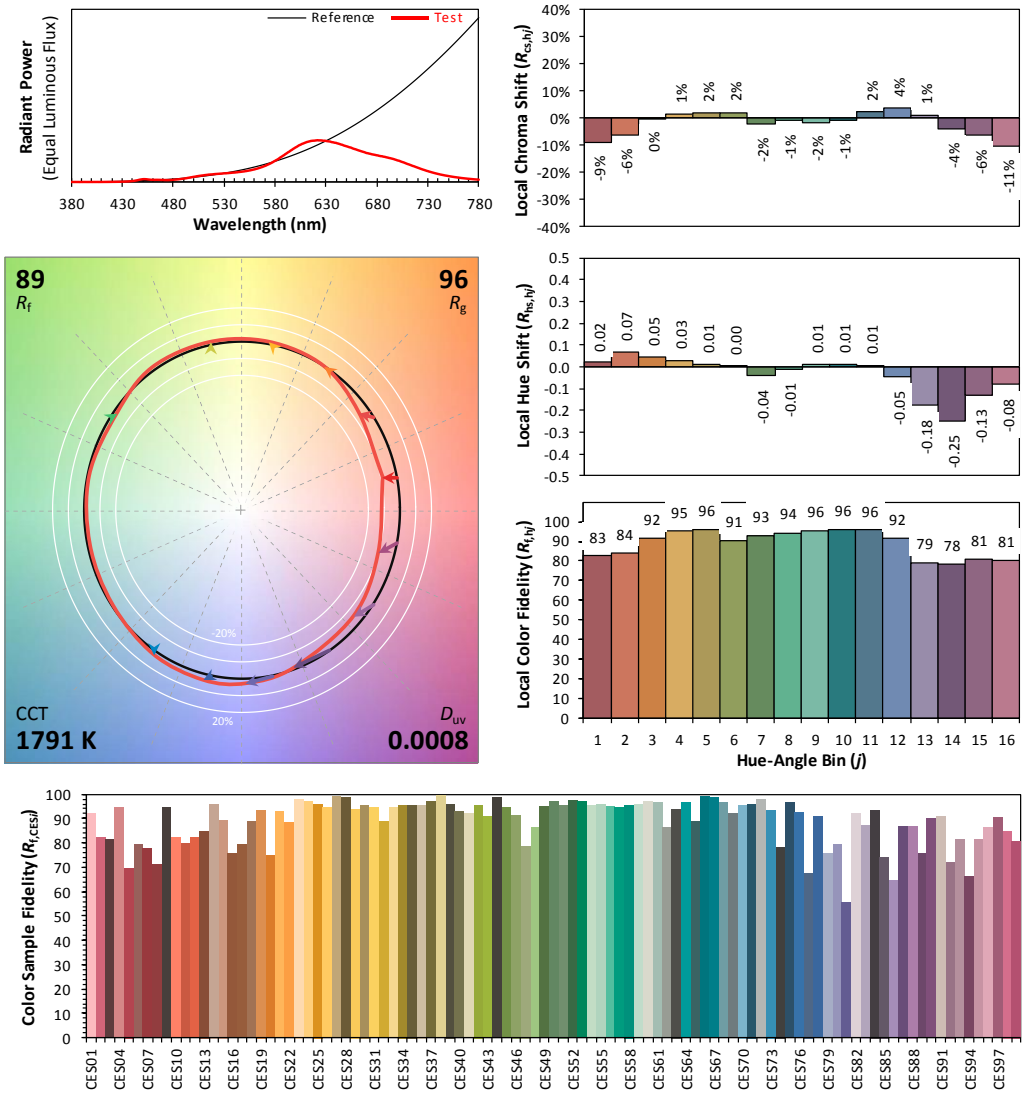

**Notes:** This is a recommended method for displaying ANSI/IES TM-30-18 information.

$x$  0.5491  
 $y$  0.4064  
 $u'$  0.3240  
 $v'$  0.5396

CIE 13.3-1995 (CRI)	
$R_a$	86
$R_g$	31

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.

Chart 4: Full Report Created with the IES TM-30 Calculator

Note: The values in this diagram might be a little different from the values in Table 2 due to rounding.

**Zonal Lumen Tabulation- Goniophotometer Method**

$\gamma(^{\circ})$	Lumens	% Total
0- 10	1.762	1.50%
10- 20	6.234	5.30%
20- 30	10.892	9.25%
30- 40	14.81	12.58%
40- 50	17.085	14.52%
50- 60	17.583	14.94%
60- 70	16.035	13.63%
70- 80	12.715	10.80%
80- 90	9.257	7.87%
90-100	5.636	4.79%
100-110	2.627	2.23%
110-120	1.005	0.85%
120-130	0.539	0.46%
130-140	0.489	0.42%
140-150	0.514	0.44%
150-160	0.365	0.31%
160-170	0.126	0.11%
170-180	0.014	0.01%
Total	117.7	100%

$\gamma(^{\circ})$	Lumens	% Total
0-110	114.636	97.41%
110-180	3.052	2.59%
0-180	117.7	100%

Table 5: Zonal Lumen

**Illuminance Plots- Goniophotometer Method**

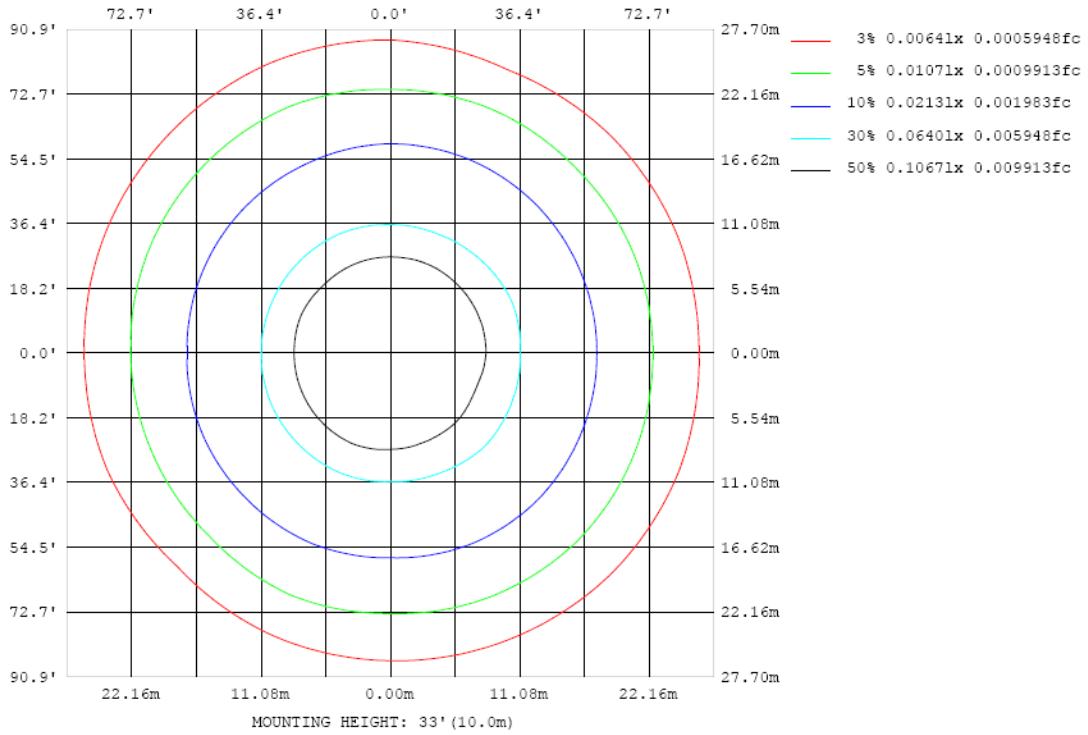


Chart 5: Illuminance Plot (Footcandles)

**Luminous Intensity Distribution Plots- Goniophotometer Method**

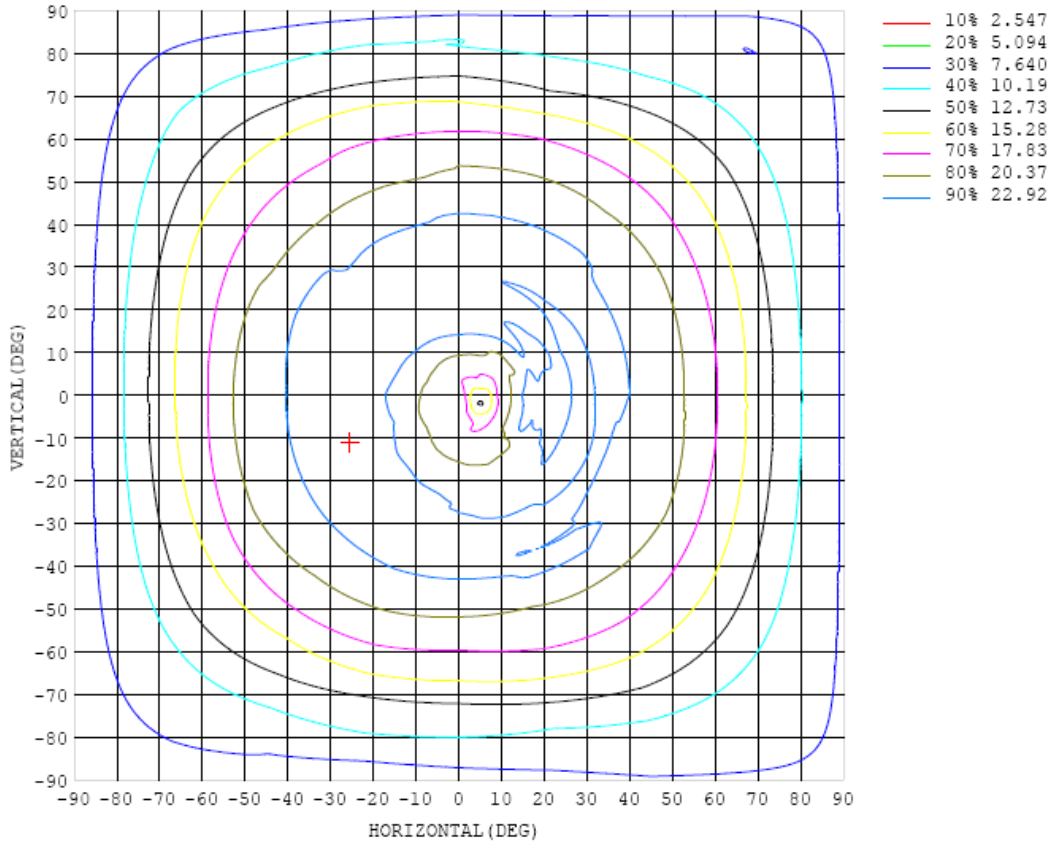


Chart 6: Isocandela Plot

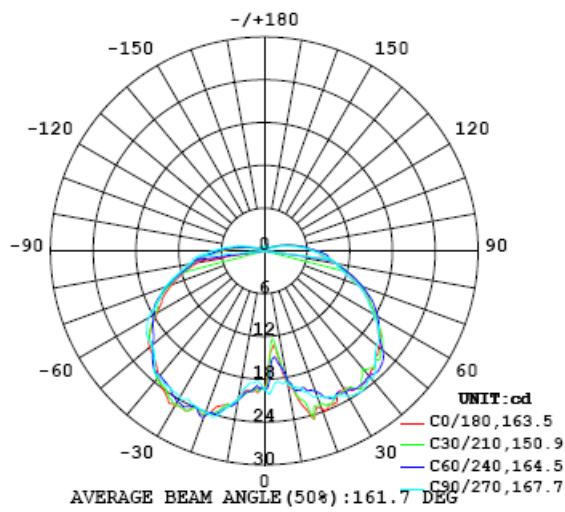


Chart 7: Polar Candela Distribution

**Luminous Intensity Data- Goniophotometer Method**

Table--1 UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	19.3	19.3	19.3	19.3	19.3	19.3	19.3	19.3	19.3	19.3	19.3	19.3	19.3	19.3	19.3	19.3			
5	13.6	12.5	15.0	18.3	18.5	18.9	18.9	19.7	19.9	19.8	19.6	19.2	18.6	18.2	17.3	15.6			
10	19.1	18.6	18.2	18.1	19.0	19.3	20.1	20.3	20.8	21.0	21.3	21.1	21.2	20.2	19.2	18.5			
15	23.1	21.9	20.1	19.2	20.1	20.9	21.9	22.6	22.4	22.8	23.2	23.3	23.5	22.8	21.4	20.9			
20	23.6	23.0	20.9	21.4	21.7	22.4	23.0	24.0	24.2	24.3	24.7	24.4	24.0	23.2	22.6	22.6			
25	23.5	23.1	22.8	22.1	22.7	23.8	24.0	24.5	24.4	24.6	24.0	23.9	23.8	23.4	23.1	23.0			
30	22.5	22.5	22.9	22.8	23.5	24.4	24.9	25.3	24.9	24.8	24.4	24.2	23.7	23.3	23.1	22.4			
35	23.6	23.6	23.2	23.4	24.0	24.1	24.7	25.0	24.3	23.9	23.2	23.4	23.3	23.3	23.1	23.1			
40	22.9	21.7	22.9	22.9	23.3	24.0	23.5	23.2	23.1	23.4	22.8	23.0	23.0	23.1	23.0	22.9			
45	22.1	22.0	23.0	22.9	22.0	22.3	21.8	21.8	21.7	21.9	22.1	22.0	21.8	21.7	22.3	22.4			
50	21.1	21.6	21.7	20.8	20.6	21.1	20.9	21.1	21.0	20.6	20.4	20.7	20.6	20.8	20.9	21.5			
55	19.9	20.0	19.5	19.6	19.6	19.5	19.4	19.8	19.5	19.6	19.1	19.5	20.2	20.0	20.0	20.0			
60	18.1	18.1	18.4	18.2	17.7	18.0	17.7	17.7	17.4	17.7	17.8	17.9	18.7	18.6	18.5	18.2			
65	16.2	16.4	16.8	16.4	15.9	16.2	15.5	15.5	15.8	16.3	16.7	16.9	16.4	16.6	16.1	16.3			
70	14.1	14.6	14.7	14.3	14.0	13.7	13.3	14.0	13.8	14.2	14.5	14.8	14.7	13.7	14.2	14.4			
75	12.2	12.4	12.4	11.6	11.6	12.0	11.4	11.7	11.6	12.1	12.2	12.4	12.6	11.9	11.7	12.3			
80	10.3	10.2	10.2	9.78	10.2	10.1	9.31	9.27	9.70	10.3	10.3	10.5	10.7	10.2	9.87	9.92			
85	8.08	8.47	9.01	8.67	8.38	7.97	7.70	8.34	8.09	8.53	8.62	9.27	9.38	9.27	8.39	8.00			
90	7.39	7.36	7.42	6.89	6.78	6.81	6.12	6.01	5.84	6.15	6.51	6.96	7.22	7.07	7.04	7.35			
95	5.74	5.75	5.85	5.67	5.39	5.00	4.38	4.17	4.19	4.39	4.77	5.05	5.48	5.34	5.41	5.67			
100	4.34	4.41	4.38	4.31	3.94	3.40	2.80	2.73	2.66	2.98	3.23	3.48	3.92	3.73	3.99	4.22			
105	3.03	3.23	3.06	2.96	2.68	2.12	1.71	1.66	1.65	1.80	1.92	2.20	2.54	2.51	2.76	2.91			
110	2.10	2.24	2.06	1.78	1.57	1.31	1.09	1.00	0.90	1.03	1.10	1.29	1.39	1.61	1.76	1.92			
115	1.40	1.44	1.28	1.13	0.99	0.88	0.78	0.72	0.56	0.61	0.70	0.69	0.87	0.97	1.07	1.28			
120	0.92	0.92	0.87	0.84	0.77	0.68	0.63	0.64	0.49	0.55	0.54	0.50	0.55	0.64	0.71	0.85			
125	0.72	0.64	0.66	0.67	0.63	0.63	0.61	0.63	0.52	0.56	0.52	0.42	0.42	0.50	0.52	0.65			
130	0.60	0.57	0.55	0.59	0.61	0.68	0.65	0.65	0.59	0.63	0.56	0.47	0.44	0.46	0.49	0.50			
135	0.59	0.61	0.59	0.66	0.69	0.76	0.72	0.75	0.66	0.71	0.61	0.55	0.50	0.54	0.54	0.52			
140	0.70	0.70	0.72	0.79	0.86	0.89	0.86	0.87	0.71	0.75	0.65	0.65	0.63	0.65	0.64	0.65			
145	0.87	0.84	0.85	0.89	0.97	1.01	0.93	0.88	0.74	0.77	0.67	0.72	0.73	0.78	0.80	0.81			
150	1.04	1.02	0.97	0.94	0.97	0.98	0.86	0.83	0.72	0.75	0.65	0.67	0.77	0.85	0.89	0.97			
155	1.07	1.04	0.94	0.86	0.86	0.88	0.80	0.69	0.60	0.59	0.53	0.55	0.67	0.79	0.89	0.98			
160	1.00	0.99	0.85	0.73	0.72	0.69	0.58	0.37	0.31	0.43	0.36	0.39	0.48	0.60	0.72	0.85			
165	0.71	0.74	0.67	0.56	0.51	0.45	0.34	0.16	0.12	0.22	0.23	0.26	0.34	0.37	0.43	0.61			
170	0.47	0.49	0.44	0.37	0.29	0.21	0.13	0.01	0.02	0.03	0.05	0.13	0.18	0.17	0.28	0.39			
175	0.26	0.27	0.25	0.20	0.14	0.06	0.02	0.01	0.01	0.01	0.01	0.02	0.05	0.11	0.19	0.23			
180	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04			

Table 6: Luminous Intensity Data

## EQUIPMENT LIST

Test Equipment	Model	Equipment No.	Calibration Date	Calibration Due date
Goniophotometer system	GO-R5000	HZTE011-01	Aug. 05, 2022	Aug. 04, 2023
Digital Power Meter	PF2010A	HZTE028-01	Aug. 05, 2022	Aug. 04, 2023
AC Power Supply	DPS1060	HZTE001-06	Aug. 05, 2022	Aug. 04, 2023
DC Power Supply	WY12010	HZTE004-03	Aug. 05, 2022	Aug. 04, 2023
Temperature recorder	JM624U	HZTE018-08	Aug. 05, 2022	Aug. 04, 2023
Temperature and humidity recorder	JR900	HZTE018-01	Aug. 05, 2022	Aug. 04, 2023
Standard source	D908	HZTE012-01	Aug. 05, 2022	Aug. 04, 2023
Integrate Sphere system	3M	HZTE015-04	Aug. 05, 2022	Aug. 04, 2023
Digital Power Meter	WT210	HZTE008-01	Aug. 05, 2022	Aug. 04, 2023
AC Power Supply	PCR 500L	HZTE001-07	Aug. 05, 2022	Aug. 04, 2023
DC Power Supply	IT6154	HZTE004-04	Aug. 05, 2022	Aug. 04, 2023
Standard source	SCL-1400	HZTE012-02	Aug. 05, 2022	Aug. 04, 2023
Temperature and humidity recorder	JR900	HZTE018-02	Aug. 05, 2022	Aug. 04, 2023
Temperature Meter	TES1310	HZTE017-01	Aug. 05, 2022	Aug. 04, 2023

Table 7: Test Equipment List

## TEST METHODS

### Seasoning of SSL Product

For the purpose of rating new SSL products, SSL products shall be tested with no seasoning. Therefore, no seasoning was performed.

### Sphere-Spectroradiometer Method- Photometric and Electrical Measurements

A Labsphere Model CDS 2100 Spectroradiometer and 3 Meter Sphere was used to measure correlated color temperature, chromaticity coordinates, and the color rendering index for each SSL unit. The coating reflectance of each sphere is 98%. The measure geometry is  $4\pi$ . Self-absorption correction is conducted in testing. Bandwidth of spectroradiometer is 350nm-1050nm.

Ambient temperature was measured at a position inside the sphere. Each SSL unit was operated on the client provided driver at the rated input voltage in its designated orientation.

The stabilization time typically ranges from 30 min (small integrated LED lamps) to 2 or more hours for large SSL luminaires). It can be judged that stability is reached when the variation (maximum – minimum) of at least 3 readings of the light output and electrical power over a period of 20 min, taken 10 minutes apart, is less than 0.5 %.

Electrical measurements including voltage, current, and power were measured using the Yokogawa Power Analyzer.

The standard reference of the integrated sphere system is halogen incandescent lamp, the intensity distribution

type is omni-directional, and is traceable to the National Institute of Standards and Technology. The uncertainty of integrating sphere system reported in this document is expanded uncertainty is 2.1% with a coverage factor  $k=2$ .

## **Goniophotometer Method**

### **Photometric and Electrical Measurements**

An EVERFINE Type C Model GO-R5000 Goniophotometer was used to measure the intensity at each angle of distribution for each sample. The photometric distance is 2.475m for near-field measurement or 30m for far-field measurement. Bandwidth of spectroradiometer is 380nm-780nm.

Ambient temperature was measured at the same height of the sample mounted on the Goniophotometer equipment. Each SSL unit was operated on the client provided driver at the rated input voltage in its designated orientation.

The stabilization time typically ranges from 30 min (small integrated LED lamps) to 2 or more hours for large SSL luminaires). It can be judged that stability is reached when the variation (maximum – minimum) of at least 3 readings of the light output and electrical power over a period of 20 min, taken 10 minutes apart, is less than 0.5 %.

Electrical measurements including voltage, current, and power were measured using the Everfine Digital Power Meter.

Some graphics were created with Photometric Plus software.

The standard reference of the Goniophotometer system is halogen incandescent lamp, the intensity distribution type is omni-directional, and is traceable to the National Institute of Metrology P.R. China.

The uncertainty of goniophotometer system reported in this document is expanded uncertainty is 2.3% with a coverage factor  $k=2$ .

### **Color Characteristics Measurements**

The color characteristics of SSL products include chromaticity coordinates, correlated color temperature, and color rendering index. These characteristics of SSL products may be spatially non-uniform, and thus, in order that they can be specified accurately, the color quantities shall be measured as values that are spatially average, weighted to intensity, over the angular range where light is intentionally emitted from the SSL product. The color characteristics measurements are using gonio-spectroradiometer.

\*\*\* End of Report \*\*\*

This report is considered invalidated without the Special Seal for Inspection of the LTL. This report shall not be altered, increased or deleted. The results shown in this test report refer only to the sample(s) tested. Without written approval of LTL, this test report shall not be copied except in full and published as advertisement.