


# INNOFIT GEN 2 SERIES



GREENCREATIVE

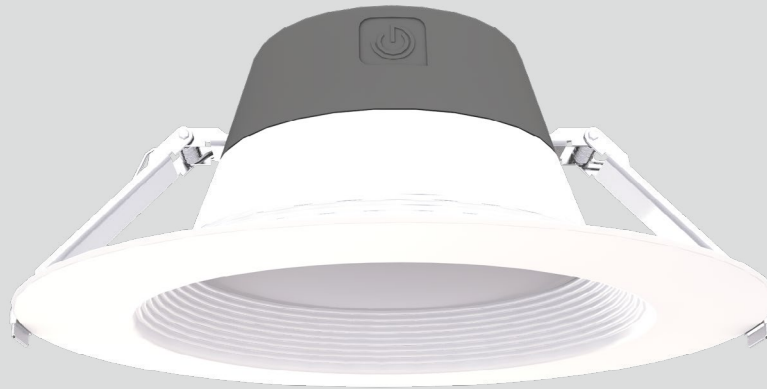

## FEATURES

- 4", 6", 8" and 9.5" fixture sizes
- 2700K, 3000K, 3500K, 4000K, and 5000K CCT available with 80 CRI
- Selectable lumen output powered by SelectDrive technology
- 0-10V or 120V forward and reverse-phase line voltage dimmable
- Ambient temperature rating: -4°F to 95°F (-20°C to 35°C)
- IC, Air-Tight and Wet Location rated housing
- L70 lifetime rating of 50,000 hours
- 5 year warranty



## APPLICATIONS



• Commercial



• Education



• Office



• Retail

## BENEFITS

### Select Drive



### Adjustable Lumen Output

Our SelectDrive technology allows you to easily adjust the light output. Choose low, medium, or high to ensure that each space has just the right amount of light.

### Industry-Leading Efficacy

The new generation of INNOFIT offers the highest efficacy on the market for downlight products. At up to 130 lumens per watt, the INNOFIT creates powerful ROI savings from the moment it is installed.




Spring clips for easy installation

0-10V or 120V forward and reverse-phase dimmable

Fit shallow plenums, 3-1/4" maximum fixture depth

Suitable for wet locations

IC-rated Airtight housing

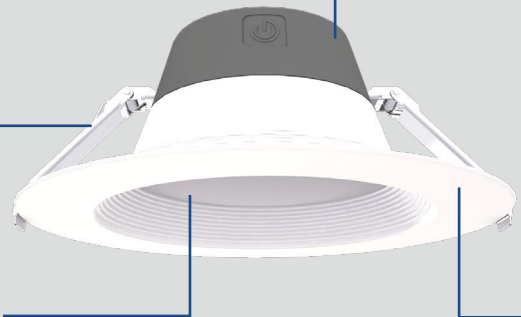

## ORDERING INFORMATION

Module				
Series	Size	CRI	CCT	Dimming
<input checked="" type="checkbox"/> <b>INFT</b> INNOFIT	<input type="checkbox"/> <b>4"</b> 4" Diameter 500 / 700 / 1,000 lumens	<input checked="" type="checkbox"/> <b>8</b> CRI 80	<input type="checkbox"/> <b>27</b> 2700K	<input type="checkbox"/> <b>DIM010UNV</b> 120-277V, 0-10V (Dimmable to 5%)
	<input type="checkbox"/> <b>6"</b> 6" Diameter 800 / 1,100 / 1,600 lumens		<input type="checkbox"/> <b>30</b> 3000K	<input type="checkbox"/> <b>DIM120V</b> 120V forward or reverse-phase line voltage (Dimmable to 10%)
	<input type="checkbox"/> <b>8"</b> 8" Diameter 1,100 / 1,600 / 2,100 lumens		<input type="checkbox"/> <b>35</b> 3500K	
	<input type="checkbox"/> <b>9.5"</b> 9.5" Diameter 2,100 / 2,600 / 3,500 lumens		<input type="checkbox"/> <b>40</b> 4000K	
			<input type="checkbox"/> <b>50</b> 5000K	