



Redefine clarity

A versatile cylinder with brilliant performance



Slim | Brilliant | Flexible

Benefits

Optimal Flexibility Industry leading field-selectable lumen output, four field changeable optical distributions, and wide range of dimming options.

Comprehensive Mounting Choices Multiple mounting options means more customization. From artistic to purely utilitarian, PXCYL is suitable for any commercial or residential applications.

Smooth and Subtle

Comprehensive Mounting Choices

Pendant

modern finish.

Suspension

Customized in length and finish from 12" to 96". Suspension mounting with cables provide more flexibility and give your space a casual look for enhancing the design style.

Wall & Wall Uplight

Accenting textured surface, pathways or columns. Give space the coziest atmosphere.

A shallow design and refined finish offer a simplistic yet polished aesthetic.

From 12" to 48" in standard length and finish, pendant stem and canopy can be customized on demand on both length and finish to match your most imaginative interior design. A Jbox canopy cover is also available for pendant, with conduits pass through, for a nice industrial and



Track

Suspended mount ready for single circuit J type track system.

Pair with our ORBIT track light for consistent interior design.

Surface

Smooth integration in any decor. Easily mount with twist and lock feature on standard 4" J-box.

Flangeless surface mount kit is available for seamless integration of the 2" PXCYL cylinder on the ceiling.



Additional Controls

Standard Drivers

PXCYL cylinder downlight comes standard with SelectDrive technology, allowing for field selection of three lumen outputs with just a flip of switch on the driver with either 120V or 0-10V dimmable options.



Driver & Control Options

Take even more control with a variety of 3rd party control system options with static lumen output.


Details of the options are available in product specification sheet.









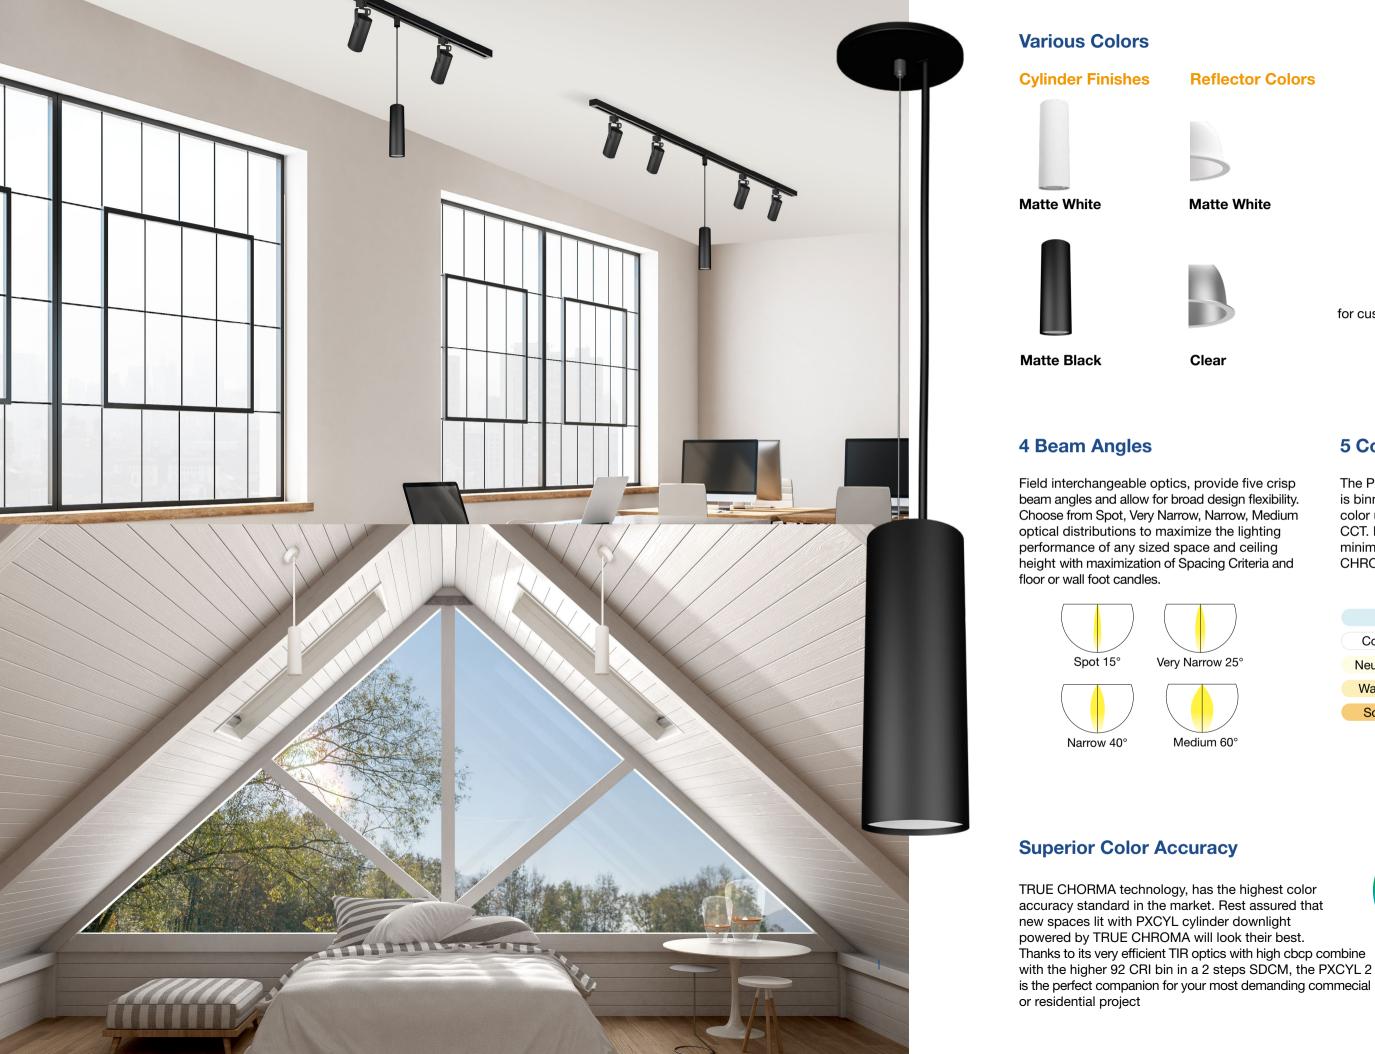

Reflector Colors



Matte White



Clear



Please contact factory for customized finish and reflector options





5 Color Temperatures

The PXCYL cylinder downlight COB LED is binned to 3-step SDCM to ensure color uniformity accross the different CCT. It comes standard with 90 CRI minimum, and up to 97 CRI with TRUE CHROMA in 3000K.

Day Light 5000K	90+ CRI
Cool White Light 4000K	90+ CRI
Neutral White Light 3500K	90+ CRI
Warm White Light 3000K	TRUE CHROMA
Soft White Light 2700K	90+ CRI



High CBCP High CRI 92 2 SDCM



Your Partner for Professional Lighting Solutions

