

Project Name:	Type:
Part Number:	Date:

PXCYL CYLINDER 6"

SPECIFICATION FEATURES

- **Mechanical** - Compact fixture body made from die cast aluminum. Proprietary selectable output driver and polycarbonate lens design provide high quality light to compliment any space. Fixture bodies are available in matte black and matte white, or additional customized colors. Available in Surface, Pendant, Swivel, Suspension cable or Wall mount configuration.
- **Electrical** - Two selectable lumen output driver options with SelectDrive technology. The 120V, 50/60 Hz driver is forward or reverse phase dimmable to 5%. The 120-277V, 50/60 Hz driver is 0-10V dimmable to 5% with a low end cutoff and comes with a 12V auxiliary port that provides power for field installed sensors and control modules. Static lumen output driver options include the Lutron 5-Series Ecosystem driver which provides smooth dimming to 5% and the Lutron Hi-Lume 1% EcoSystem driver with Soft-On, Fade-to-Black which dims to 1%. EldoLED ECOdrive and SOLOdrive drivers are available in 0-10V and DALI configurations and dim smoothly to 1% and 0.1% respectively. Enlighted compact sensors and Philips EasySense sensors are field installable and directly integrate with the factory provided Philips Xitanium driver and Sensor Ready bridge.
- **Optical** - Flanged spun aluminum reflector. 45° optical cutoff. Field interchangeable optical lenses. Five beam distributions ranging from 15°-75°. Wall wash field installed accessory. COB LED binned to 3-step SDCM to ensure color uniformity in 2700K, 3000K, 3500K, 4000K or 5000K CCT. Minimum 90 CRI. 97 CRI with TRUE CHROMA available in 3000K only.
- **Thermal** - Die cast heat sink maximizes passive thermal management and achieves an L70 rated lifetime of 50,000 hours. Fixture operating temperature: -22°F to 95°F (-30°C to 35°C).
- **Compliance and Warranty** - ETL Listed for damp location, WET location available for Surface Mount and Wall Mount downlighting under covered ceiling. Complies with FCC 47CFR Part 15B consumer limits for EMI/RFI emissions. 5 year parts warranty for complete fixture. Optional 10 Year Extended Warranty available, subject to same terms, conditions and installation requirements as standard 5 Year Warranty.



092321



BENEFITS

- Get the right amount of light with SelectDrive technology
- Multiple finish and customization available to match any décor
- Surface, Pendant, Cable, Down-wall and Up-wall mounting options are available.
- Field interchangeable optics ensure smooth light levels
- Large variety of dimming and sensor control options

APPLICATIONS

- Retail
- Hospitality
- Residential
- Education
- Healthcare



PXCYL CYLINDER 6"

ORDERING INFORMATION

ORDERING EXAMPLE

PXCYL6/SM/LEM9035/KDIM010UNV/MD/WH/CC

SelectDrive Light Engine

Model Series	Size	Mounting	Light Engine	CRI	CCT	Driver	Optical Distribution	Cylinder Finish	Reflector Finish	Options
<input type="checkbox"/> PXCYL PXCYL Cylinder	<input type="checkbox"/> 6 6"	<input type="checkbox"/> SM Surface Mount	<input type="checkbox"/> LES Small Light Engine 500-700-1000 lumens	<input type="checkbox"/> 90 CRI 90+	<input type="checkbox"/> 27 ³ 2700K	<input type="checkbox"/> KDIM120V SelectDrive 120V, 50/60Hz Forward/Reverse phase dimming	<input type="checkbox"/> SP Spot 15° Beam Angle	<input type="checkbox"/> WH Matte White	<input type="checkbox"/> CC Clear	<input type="checkbox"/> EM ⁵ 10W Field Installable Emergency Backup
		<input type="checkbox"/> CM ¹ Cable Mount Ready	<input type="checkbox"/> LEM Medium Light Engine 1500-2000-2500 lumens	<input type="checkbox"/> 97 ² 97 CRI 3000K TRUE CHROMA	<input type="checkbox"/> 30 3000K	<input type="checkbox"/> KDIM010UNV SelectDrive 120-277V, 50/60Hz 0-10V dimming	<input type="checkbox"/> VN Very Narrow 25° Beam Angle	<input type="checkbox"/> BL Matte Black	<input type="checkbox"/> WH White	<input type="checkbox"/> EM ⁵ -CEC 10W Field Installable Emergency Backup California Compliant
		<input type="checkbox"/> PM ¹ Pendant Mount Ready	<input type="checkbox"/> LEL Large Light Engine 3000-4000-5000 lumens		<input type="checkbox"/> 35 3500K		<input type="checkbox"/> NR Narrow 40° Beam Angle	<input type="checkbox"/> CZ ⁴ Customized	<input type="checkbox"/> CZ ⁴ Customized	<input type="checkbox"/> WET ¹⁰ Wet Location Ready
		<input type="checkbox"/> WM Wall Mount			<input type="checkbox"/> 40 4000K		<input type="checkbox"/> MD Medium 60° Beam Angle			
		<input type="checkbox"/> WMUP Wall Mount Up lighting			<input type="checkbox"/> 50 ³ 5000K		<input type="checkbox"/> WD Wide 75° Beam Angle			

Fixed Lumen Output Light Engine

Model Series	Size	Mounting	Light Engine	CRI	CCT	Driver	Optical Distribution	Cylinder Finish	Reflector Finish	Options
<input type="checkbox"/> PXCYL PXCYL Cylinder	<input type="checkbox"/> 6 6"	<input type="checkbox"/> SM Surface Mount	<input type="checkbox"/> LE05 ⁵ 500 lumens	<input type="checkbox"/> 90 CRI 90+	<input type="checkbox"/> 27 ³ 2700K	<input type="checkbox"/> PSRUNV 0-10V Xitanium Driver + SR Ready Bridge, 120-277V	<input type="checkbox"/> SP Spot 15° Beam Angle	<input type="checkbox"/> WH Matte White	<input type="checkbox"/> CC Clear	<input type="checkbox"/> EM ⁵ 10W Field Installable Emergency Backup
		<input type="checkbox"/> CM ¹ Cable Mount Ready	<input type="checkbox"/> LE07 700 lumens	<input type="checkbox"/> 97 ² 97 CRI 3000K TRUE CHROMA	<input type="checkbox"/> 30 3000K	<input type="checkbox"/> XT010UNV 0-10V 1% Xitanium Driver, 120-277V	<input type="checkbox"/> VN Very Narrow 25° Beam Angle	<input type="checkbox"/> BL Matte Black	<input type="checkbox"/> WH White	<input type="checkbox"/> EM ⁵ -CEC 10W Field Installable Emergency Backup California Compliant
		<input type="checkbox"/> PM ¹ Pendant Mount Ready	<input type="checkbox"/> LE10 1,000 lumens		<input type="checkbox"/> 35 3500K	<input type="checkbox"/> LUT-5UNV Lutron EcoSystem 5% Dimming, 120-277V	<input type="checkbox"/> NR Narrow 40° Beam Angle	<input type="checkbox"/> CZ ⁴ Customized	<input type="checkbox"/> CZ ⁴ Customized	<input type="checkbox"/> ES ⁶ Philips EasySense CPM SN200 Ceiling Mount Sensor
		<input type="checkbox"/> WM Wall Mount	<input type="checkbox"/> LE15 1,500 lumens		<input type="checkbox"/> 40 4000K	<input type="checkbox"/> LUT-1UNV Lutron EcoSystem 1% Dimming, 120-277V	<input type="checkbox"/> MD Medium 60° Beam Angle			<input type="checkbox"/> ENLS ⁷ -IL Enlighted Two Wire ENLIGHTED ONE Compact Sensor
		<input type="checkbox"/> WMUP Wall Mount Up lighting	<input type="checkbox"/> LE20 2,000 lumens		<input type="checkbox"/> 50 ³ 5000K	<input type="checkbox"/> LUT-L3DUNV Lutron Hi-Lume 3-Wire 1% Dimming, 120-277V	<input type="checkbox"/> WD Wide 75° Beam Angle			<input type="checkbox"/> ENLS ⁷ -CL Enlighted Two Wire CONNECTED LIGHTING Compact Sensor
			<input type="checkbox"/> LE25 2,500 lumens			<input type="checkbox"/> ELD-E010UNV EldoLED ECOdrive 0-10V 1%, 120-277V				<input type="checkbox"/> ENLS ⁷ -IOT Enlighted Two Wire IOT Compact Sensor
			<input type="checkbox"/> LE30 3,000 lumens			<input type="checkbox"/> ELD-EDALIUNV EldoLED ECOdrive DALI 1%, 120-277V				<input type="checkbox"/> WET ¹⁰ Wet Location Ready
			<input type="checkbox"/> LE40 4,000 lumens			<input type="checkbox"/> ELD-S010UNV EldoLED SOLOdrive 0-10V 0.1%, 120-277V				
			<input type="checkbox"/> LE50 ⁹ 5,000 lumens			<input type="checkbox"/> ELD-SDALIUNV EldoLED SOLOdrive DALI 0.1%, 120-277V				
						<input type="checkbox"/> OSRDIM010347V Osram OPTOTRONIC 0-10V 1%, 347V				

¹ Cable and Pendant Mount ready for Stem or Cable Suspension, order Canopy type and length separately. ² TRUE CHROMA only available for 3000K, contact factory for detail and other CCT. ³ 2700K and 5000K are not standard CCT and might be subjected to longer lead time, contact factory for detail. ⁴ Please contact factory for customized finish color or customized reflectors for feasibility. ⁵ Emergency units are not integrated and required clearance for external installation and additional single gang J-box, provided by other, for test button face plate installation. ⁶ Philips EasySense ceiling mounted sensor is only available with the PSRUNV driver. ⁷ Enlighted Two Wire Compact Sensor with ceiling mount is only available with the PSRUNV driver. ⁸ LE05 is not available with LUT-5UNV. ⁹ LE50 is not available with LUT-5UNV and LUT-1UNV. ¹⁰ WET location are available only for Surface Mounted and Wall Mount downlighting under covered ceiling.




PXCYL CYLINDER 6"

MOUNTING AND CANOPY ACCESSORIES AND OPTIONS

Model Series	Color	Length ³	Cord Type	Stem ²	Length	Finish	
<input type="checkbox"/> CABLECPY¹ Cable mount canopy for flat and slope ceiling (use with CM mounting only)	<input type="checkbox"/> WH White	<input type="checkbox"/> 50 Adjustable length up to 50" max.	<input type="checkbox"/> 18/3 3 x 18 AWG, for non Dimming or TRIAC/ELV	<input type="checkbox"/> STEM/3-8 Stem (3/8 IPS)	<input type="checkbox"/> 12 12" long	<input type="checkbox"/> WH White	
	<input type="checkbox"/> BL Black		<input type="checkbox"/> 18/3-22/2 3 x 18 AWG, 2 x 22 AWG (purple, pink), for 0-10V control and dimming			<input type="checkbox"/> 24 24" long	<input type="checkbox"/> BL Black
	<input type="checkbox"/> CZ⁴ Customized		<input type="checkbox"/> 18/4 4 x 18 AWG, for non Dimming or TRIAC/ELV emergency wiring				<input type="checkbox"/> CZ⁴ Customized
<input type="checkbox"/> STEMSCOPY/3-8^{1,2} Pendant stem Canopy (3/8 IPS) for flat and slope ceiling up to 45° (use with PM mounting only)	<input type="checkbox"/> WH White	<input type="checkbox"/> (Blank) Leave blank if you don't need power cord	<input type="checkbox"/> (Blank) Leave blank if you don't need power cord		<input type="checkbox"/> 36 36" long	<input type="checkbox"/> CZ⁴ Customized	
	<input type="checkbox"/> BL Black	<input type="checkbox"/> 12 12" long	<input type="checkbox"/> 18/3 3 x 18 AWG, for non Dimming or TRIAC/ELV				
	<input type="checkbox"/> CZ⁴ Customized	<input type="checkbox"/> 24 24" long	<input type="checkbox"/> 18/3-22/2 3 x 18 AWG, 2 x 22 AWG (purple, pink), for 0-10V control and dimming		<input type="checkbox"/> 48 48" long		
		<input type="checkbox"/> 36 36" long	<input type="checkbox"/> 18/4 4 x 18 AWG, for non Dimming or TRIAC/ELV emergency wiring				
		<input type="checkbox"/> 48 48" long	<input type="checkbox"/> 18/4-22/2 4 x 18 AWG, 2 x 22 AWG, for emergency wiring and 0-10V control and dimming		<input type="checkbox"/> CZ⁴ Customized		
	<input type="checkbox"/> CZ⁴ Customized						

¹ The Stem and cable canopies can be used for both plane and slope ceiling. ² Stem to be ordered separately. ³ Cord length will be 12" longer than cable or Stem. ⁴ Please contact factory for customized color and length.

LINE DRAWINGS

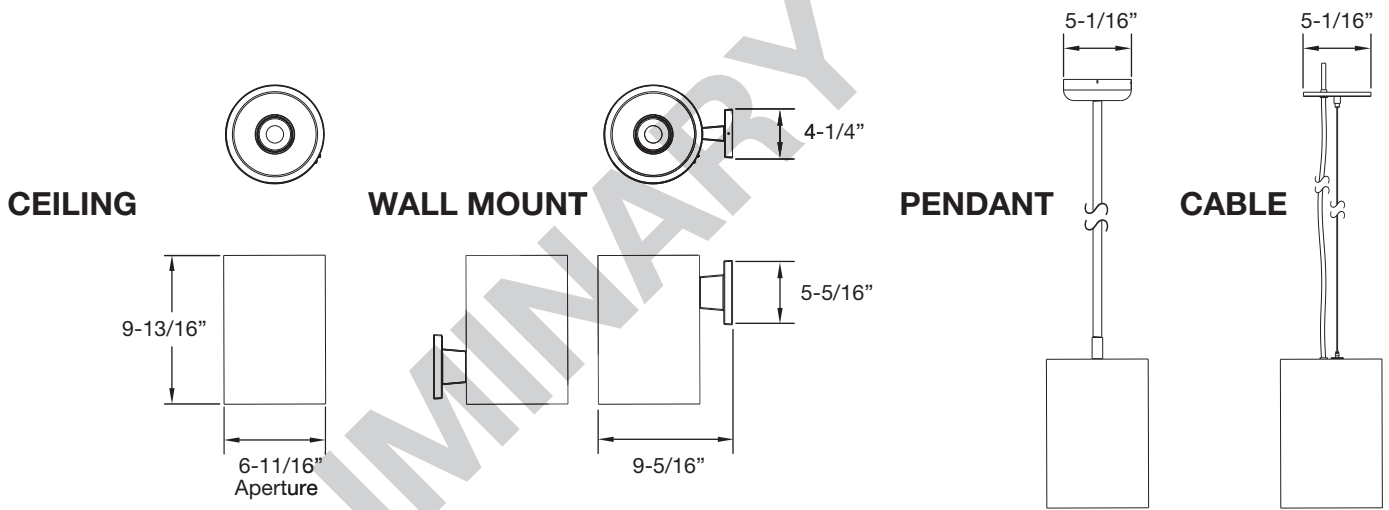

TECHNICAL INFORMATION

Light Engine	Input Voltage	Input Frequency	Input Current	Max. Input Power	THD Power	Power Factor
LES	120-277V	50-60Hz	0.115 / 0.047A	13W	<20%	>0.9
LEM			0.270 / 0.114A	31.5W		
LE05			0.056 / 0.024A	6.5W		
LE07			0.073 / 0.034A	8.5W		
LE10			0.112 / 0.047A	13W		
LE15			0.154 / 0.068A	18W		
LE20			0.218 / 0.092A	25.5W		
LE25			0.269 / 0.116A	31.5W		
LE30			0.318 / 0.133A	37.5W		
LE40			0.411 / 0.165A	48.5W		
LE50			0.487 / 0.203A	57.5W		



PXCYL CYLINDER 6"

NOMINAL PERFORMANCE

LES (LE05 / LE07 / LE10) - Low / Medium / High - 6.5 / 8.5 / 12.5W

CCT	2700K			3000K			3500K			4000K			5000K		
Output**	Low	Medium	High	Low	Medium	High	Low	Medium	High	Low	Medium	High	Low	Medium	High
Finish	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW
Clear Diffuse	500 77	700 82	1,000 80	525 81	735 86	1,050 84	550 85	770 91	1,100 88	575 88	805 95	1,150 92	580 89	810 95	1,165 93
White Finish	500 77	700 82	1,000 80	525 81	735 86	1,050 84	550 85	770 91	1,100 88	575 88	805 95	1,150 92	580 89	810 95	1,165 93

LEM (LE15 / LE20 / LE25) - Low / Medium / High - 18.0 / 25.5 / 31.5W

CCT	2700K			3000K			3500K			4000K			5000K		
Output**	Low	Medium	High	Low	Medium	High	Low	Medium	High	Low	Medium	High	Low	Medium	High
Finish	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW
Clear Diffuse	1,600 89	2,125 83	2,500 79	1,632 91	2,169 85	2,550 81	1,664 92	2,210 87	2,600 83	1,696 94	2,253 88	2,650 84	1,713 95	2,275 89	2,677 85
White Finish	1,600 89	2,125 83	2,500 79	1,632 91	2,169 85	2,550 81	1,664 92	2,210 87	2,600 83	1,696 94	2,253 88	2,650 84	1,713 95	2,275 89	2,677 85


LEL (LE30 / LE40 / LE50) - Low / Medium / High - 37.5 / 48.5 / 60.0W

CCT	2700K			3000K			3500K			4000K			5000K		
Output**	Low	Medium	High	Low	Medium	High	Low	Medium	High	Low	Medium	High	Low	Medium	High
Finish	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW	lm LPW
Clear Diffuse	3,325 69	4,085 84	4,750 79	3,360 90	4,080 84	4,800 80	3,500 93	4,250 88	5,000 83	3,640 97	4,420 91	5,200 87	3,640 97	4,420 91	5,200 87
White Finish	3,325 69	4,085 84	4,750 79	3,360 90	4,080 84	4,800 80	3,500 93	4,250 88	5,000 83	3,640 97	4,420 91	5,200 87	3,640 97	4,420 91	5,200 87

** Lumen output are based on rated lumens, for exact value please refer to the IES files

PHOTOMETRY

PXCYL6/xx/LES9030/KDIM010UNV/SP/xx/CC (High Output)



Lumens: 939 lm
CBCP: 4,637 cd
Power: 12.1 W
Efficacy: 78 lm/W
CRI: 92
Spacing Criteria: 0.3
Beam Angle: 19°

Candlepower Distribution	
Angle (°)	Average (cd)
10	2,101
20	637
30	272
40	80
50	10
60	3
70	1
80	0
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	49	3
10	31	3
12	22	4
15	14	5
20	8	7


Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	808	86
0-40	905	96
0-60	937	100
0-90	939	100



PXCYL CYLINDER 6"

PHOTOMETRY

PXCYL6/xx/LES9035/KDIM010UNV/VN/xx/CC (High Output)




Lumens: 1,161 lm
CBCP: 4,038 cd
Power: 12 W
Efficacy: 97 lm/W
CRI: 92
Spacing Criteria: 0.5
Beam Angle: 27°

Candlepower Distribution	
Angle (°)	Average (cd)
10	2,521
20	1,145
30	302
40	39
50	6
60	2
70	1
80	0
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	59	4
10	37	5
12	26	6
15	17	7
20	9	10

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	1,075	93
0-40	1,142	98
0-60	1,159	100
0-90	1,160	100

PXCYL6/xx/LES9035/KDIM010UNV/NR/xx/CC (High Output)




Lumens: 1,220 lm
CBCP: 2,352 cd
Power: 12.1 W
Efficacy: 101 lm/W
CRI: 92
Spacing Criteria: 0.7
Beam Angle: 44°

Candlepower Distribution	
Angle (°)	Average (cd)
10	2,216
20	1,423
30	443
40	33
50	5
60	2
70	1
80	0
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	51	6
10	33	8
12	23	10
15	15	12
20	8	16

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	1,114	91
0-40	1,206	99
0-60	1,219	100
0-90	1,220	100

PXCYL6/xx/LES9035/NR/KDIM010UNV/MD/xx/CC (High Output)



Lumens: 1,228 lm
CBCP: 1,385cd
Power: 12.1 W
Efficacy: 101 lm/W
CRI: 92
Spacing Criteria: 0.93
Beam Angle: 63°

Candlepower Distribution	
Angle (°)	Average (cd)
10	1,352
20	1,260
30	726
40	106
50	6
60	2
70	0
80	0
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	31	10
10	20	12
12	14	15
15	9	18
20	5	25


Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	970	79
0-40	1,208	98
0-60	1,227	100
0-90	1,228	100



PXCYL CYLINDER 6"

PHOTOMETRY

PXCYL6/xx/LES9035/KDIM010UNV/WD/xx/CC (High Output)




Lumens: 1,227 lm
CBCP: 958 cd
Power: 12 W
Efficacy: 102 lm/W
CRI: 92
Spacing Criteria: 1.2
Beam Angle: 82°

Candlepower Distribution	
Angle (°)	Average (cd)
10	741
20	707
30	917
40	499
50	21
60	6
70	2
80	1
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	17	14
10	11	17
12	8	21
15	5	26
20	3	35

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	649	53
0-40	1,100	90
0-60	1,221	100
0-90	1,226	100

PXCYL6/xx/LEM9030/KDIM010UNV/SP/xx/CC (High Output)




Lumens: 2,173 lm
CBCP: 10,647 cd
Power: 31.2 W
Efficacy: 70 lm/W
CRI: 92
Spacing Criteria: 0.3
Beam Angle: 19°

Candlepower Distribution	
Angle (°)	Average (cd)
10	488
20	147
30	64
40	19
50	2
60	1
70	0
80	0
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	11	3
10	7	3
12	5	4
15	3	5
20	2	7

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	1,865	86
0-40	2,090	96
0-60	2,165	100
0-90	2,172	100

PXCYL6/xx/LEM9030/KDIM010UNV/VN/xx/CC (High Output)



Lumens: 2,707 lm
CBCP: 9,427 cd
Power: 31.7 W
Efficacy: 85.3 lm/W
CRI: 92
Spacing Criteria: 0.5
Beam Angle: 27°

Candlepower Distribution	
Angle (°)	Average (cd)
10	5,780
20	2,672
30	699
40	91
50	14
60	5
70	2
80	1
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	134	4
10	86	5
12	60	6
15	38	7
20	21	9


Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	2,505	93
0-40	2,660	98
0-60	2,701	100
0-90	2,706	100



PXCYL CYLINDER 6"

PHOTOMETRY

PXCYL6/xx/LEM9030/KDIM010UNV/NR/xx/CC (High Output)




Lumens: 2,845 lm
CBCP: 5,368 cd
Power: 31.7 W
Efficacy: 90 lm/W
CRI: 92
Spacing Criteria: 0.7
Beam Angle: 44°

Candlepower Distribution	
Angle (°)	Average (cd)
10	5,090
20	3,313
30	1,031
40	80
50	13
60	5
70	2
80	1
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	118	6
10	76	8
12	53	10
15	34	12
20	19	16

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	2,582	91
0-40	2,806	99
0-60	2,838	100
0-90	2,843	100

PXCYL6/xx/LEM9030/KDIM010UNV/MD/xx/CC (High Output)




Lumens: 2,831 lm
CBCP: 3,181 cd
Power: 32 W
Efficacy: 88 lm/W
CRI: 92
Spacing Criteria: 0.9
Beam Angle: 64°

Candlepower Distribution	
Angle (°)	Average (cd)
10	3,103
20	2,867
30	1,659
40	279
50	15
60	4
70	2
80	0
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	72	10
10	46	12
12	32	15
15	20	19
20	12	25

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	2,219	78
0-40	2,774	98
0-60	2,825	100
0-90	2,828	100

PXCYL6/xx/LEM9030/KDIM010UNV/WD/xx/CC (High Output)



Lumens: 2,860 lm
CBCP: 2,254 cd
Power: 31.6 W
Efficacy: 91 lm/W
CRI: 92
Spacing Criteria: 1.2
Beam Angle: 81°

Candlepower Distribution	
Angle (°)	Average (cd)
10	1,736
20	1,651
30	2,152
40	1,136
50	44
60	14
70	6
80	2
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	40	14
10	26	17
12	18	21
15	11	26
20	6	34


Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	1,524	53
0-40	2,572	90
0-60	2,843	100
0-90	2,856	100



PXCYL CYLINDER 6"

PHOTOMETRY

PXCYL6/xx/LEL9030/KDIM010UNV/SP/xx/CC (High Output)




Lumens: 4,051 lm
CBCP: 10,501 cd
Power: 57 W
Efficacy: 70 lm/W
CRI: 92
Spacing Criteria: 0.5
Beam Angle: 30°

Candlepower Distribution	
Angle (°)	Average (cd)
10	826
20	308
30	140
40	45
50	5
60	2
70	1
80	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	19	4
10	12	5
12	9	6
15	5	8
20	3	11

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	3,329	82
0-40	3,854	95
0-60	4,028	99
0-90	4,047	100

PXCYL6/xx/LEL9030/KDIM010UNV/VN/xx/CC (High Output)




Lumens: 4,652 lm
CBCP: 11,142 cd
Power: 55 W
Efficacy: 85 lm/W
CRI: 92
Spacing Criteria: 0.5
Beam Angle: 33°

Candlepower Distribution	
Angle (°)	Average (cd)
10	791
20	460
30	186
40	25
50	5
60	2
70	1
80	0
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	18	5
10	12	6
12	8	7
15	5	9
20	3	12

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	4,073	88
0-40	4,512	97
0-60	4,630	100
0-90	4,648	100

PXCYL6/xx/LEL9030/KDIM010UNV/NR/xx/CC (High Output)



Lumens: 5,185 lm
CBCP: 9,759 cd
Power: 54.6 W
Efficacy: 95 lm/W
CRI: 92
Spacing Criteria: 0.7
Beam Angle: 43°

Candlepower Distribution	
Angle (°)	Average (cd)
10	8,005
20	5,264
30	2,417
40	212
50	36
60	13
70	6
80	2
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	186	6
10	119	8
12	83	10
15	53	12
20	30	16


Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	4,423	85
0-40	5,080	98
0-60	5,165	100
0-90	5,180	100



PXCYL CYLINDER 6"

PHOTOMETRY

PXCYL6/xx/LEL9030/KDIM010UNV/MD/xx/CC (High Output)




Lumens: 5,205 lm
CBCP: 6,988 cd
Power: 60 W
Efficacy: 95 lm/W
CRI: 92
Spacing Criteria: 0.8
Beam Angle: 57°

Candlepower Distribution	
Angle (°)	Average (cd)
10	6,020
20	4,454
30	3,248
40	709
50	39
60	13
70	6
80	2
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	140	9
10	89	11
12	62	13
15	40	16
20	22	22

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	3,848	74
0-40	5,040	97
0-60	5,185	100
0-90	5,199	100

PXCYL6/xx/LEL9030/KDIM010UNV/WD/xx/CC (High Output)



Lumens: 5,226 lm
CBCP: 4,411 cd
Power: 54.7 W
Efficacy: 95 lm/W
CRI: 92
Spacing Criteria: 1.1
Beam Angle: 72°

Candlepower Distribution	
Angle (°)	Average (cd)
10	4,115
20	3,945
30	3,422
40	1,503
50	86
60	28
70	12
80	5
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	96	12
10	61	15
12	42	18
15	27	22
20	15	29

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	3,262	62
0-40	4,794	92
0-60	5,190	99
0-90	5,218	100

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.