

**ANSI/IES LM-79-19**  
**MEASUREMENT AND TEST REPORT**  
For

**GREEN CREATIVE LTD**

Room 3603, Level 36, Tower 1, Enterprise Square Five, 38 Wang Chiu Road, Kowloon Bay, KL,  
Hong Kong

**Test Model: SLMFT9/9CCTS/DIM010UNV**

<b>Report Type:</b>	Electrical and Photometric tests including: Luminous Flux, Power Factor, Chromaticity, Luminous Intensity Distribution.
<b>Reviewed By:</b>	Hill Liu <span style="float: right;">Hill Liu</span>
<b>Report Number:</b>	2402Z64209E-EE-3
<b>Test Date:</b>	2024-11-24
<b>Report Date:</b>	2024-12-27
<b>Approved by:</b>	Blake Zhang / EE Engineer
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Shenzhen) 5/F(B-West) -7/F, the 3rd Phase of Wan Li Industrial Building D, Shihua Road, Futian Free Trade Zone Shenzhen, Guangdong, China. Tel: +86-755-33320018 Fax: +86-755-33320008
<b>Test Location:</b>	Test facility was located at Room 301, No.113, Pingkang Road, Dalang, Dongguan, Guangdong, China.

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.(Shenzhen). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S. Government. \*This report contains data that are not covered by the NVLAP accreditation.

## 1. Product Description#

### General Information:

One test sample was in good condition and received on 2024-11-22, and used for testing.

Model Tested: SLMFT9/9CCTS/DIM010UNV  
Manufacturer: GREEN CREATIVE LTD  
Brand Name: GREEN CREATIVE  
Product Designation: LED Surface Mount Downlight  
Burning Time Before Test: 0hour(For New Products)

### Rated Values:

Rated Voltage/Frequency: 120V-277 AC 50/60Hz  
Rated Power: 15W  
Nominal CCT: 2700K/3000K/3500K/4000K/5000K  
Nominal Lumen Output: 1250lm, 1250lm, 1350lm, 1350lm, 1350lm

## 2. Standards Used

- ANSI/IES LM-79-19: Approved method: Optical and Electrical Measurements of Solid-State Lighting Products
- ANSI C82.77-10-2014: Harmonic Emission Limits – Related Power Quality Requirements for Lighting
- \*IES TM-30-18: IES Method for Evaluating Light Source Color Rendition (This method is not in NVLAP accreditation scope)

### 3. Description of Test Equipment

Device	Manufacture	Model No	Serial No	Calibration date	Calibration due date
2.0m integrating sphere	EVERFINE	R98	11010018	2024-07-25	2025-07-24
spectroradiometer	EVERFINE	HAAS-2000	G112048TS81331121	2024-07-25	2025-07-24
Digital Power Meter	EVERFINE	PF2010A	1011004	2024-07-25	2025-07-24
Digital CC&CV DC Power Supply	EVERFINE	WY305-V1	1101047	2024-07-25	2025-07-24
Standard Light Source	EVERFINE	D204	N/A	2023-05-12	2025-05-11
Special zero-voltage synchronous switching AC	EVERFINE	DPS1010-YF	1011001T	2024-07-25	2025-07-24

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attested that all calibration has been performed using suitable standards traceable to National Primary Standards and International System of Units (SI).

## 4. Test Method

Product was tested with no seasoning. All stabilization and measurements were made in compliance with ANSI/IES LM-79-19. The product was operated at rated voltage or at voltage required by manufacturer. The ambient temperature of the sample was maintained at  $25^{\circ}\text{C} \pm 1.2^{\circ}\text{C}$  during measurement. And relative humidity is maintained between 10% and 65%. The air flow around the SSL product is less than 0.2m/s.

### Integrating Sphere System

The system includes AC power source, digital power meter, DC power supply, Spectroradiometer, and integrating sphere. The integrating sphere system is calibrated by standard spectrum light source before measurement.

$4\pi$  geometry was used during measurement. The product was operated in its intended orientation in application and was recorded in this report.

The uncertainty of the light output (luminous flux) measurements is  $U=2.1\%$  ( $K=2$ ), at the 95% confidence level. The uncertainty of the correlated color temperature measurements is  $U=22\text{K}$  ( $K=2$ ), at the 95% confidence level. The uncertainty of the CRI is  $U=2.1(K=2)$ , at the 95% confidence level.

The uncertainty of power meter AC current  $U=0.19\%$  of rdg, AC Voltage  $U=0.18\%$  of rdg, Power  $U=0.46\%$  ( $K=2$ ), at the 95% confidence level.

### Fidelity Index and Gamut Index Calculation

The  $R_f$ ,  $R_g$  was calculated according to IES TM-30-18 by using calculation tools. The calculation was based on the measured SPD from 380nm to 780nm with 1nm intervals. All the colors in this report is for reference only.

## 5. Test Result

### [Integrating Sphere System]

Test facility was located at Room 301, No.113, Pingkang Road, Dalang, Dongguan, Guangdong, China.

**Control Setting: 2700K**

The diameter of the sphere: 2M

The coating reflectance of sphere: 98%

Total operating time for integrating sphere test: **1.0 hour**

Test orientation: **Downward**


### Photometric and Electrical Measurement Result

Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	Luminous Flux(lm)	Efficacy (lm/W)
120.0	60	0.1194	14.03	0.9791	1264.1	90.11

Radiant Flux (W)	CCT (K)	Duv	x	y	u'	v'
4.349	2675	0.00228	0.4659	0.4182	0.2630	0.5311

### Color Rendering Index

<b>Ra</b>			
<b>92.5</b>			
<b>R1</b>	<b>R2</b>	<b>R3</b>	<b>R4</b>
93	98	97	92
<b>R5</b>	<b>R6</b>	<b>R7</b>	<b>R8</b>
93	98	90	78
<b>R9</b>	<b>R10</b>	<b>R11</b>	<b>R12</b>
54	95	95	85
<b>R13</b>	<b>R14</b>	<b>R15</b>	
95	99	87	

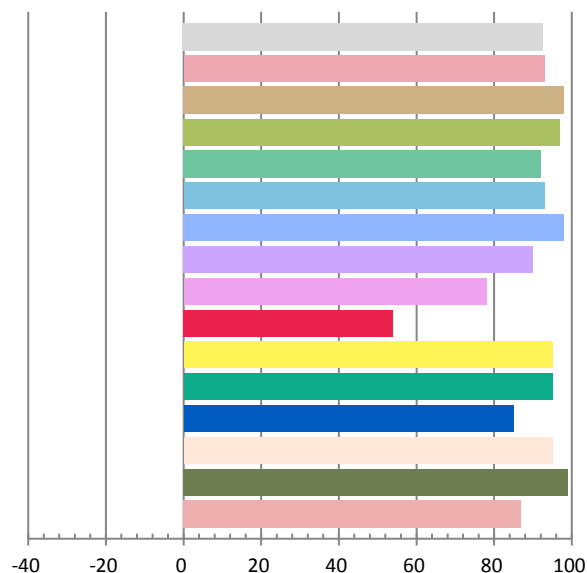







## ANSI/IES TM-30-18 Color Rendition Report

Source: User SPD

Manufacturer: GREEN CREATIVE LTD

Date: 2024/11/24

Model: SLMFT9/9CCTS/DIM010UNV

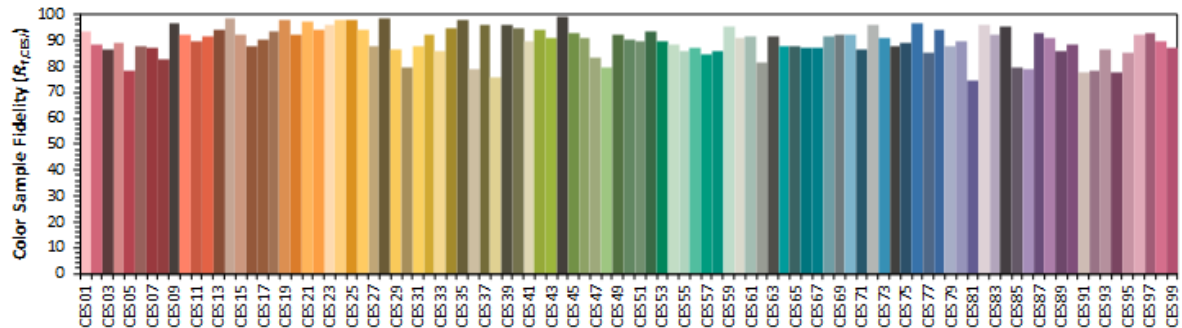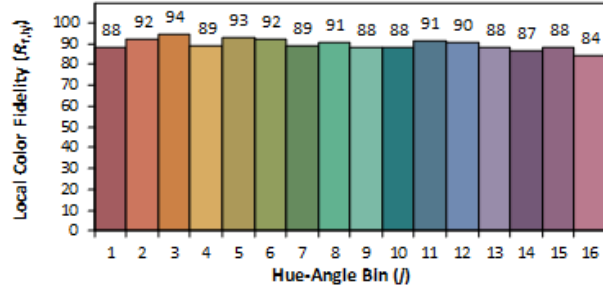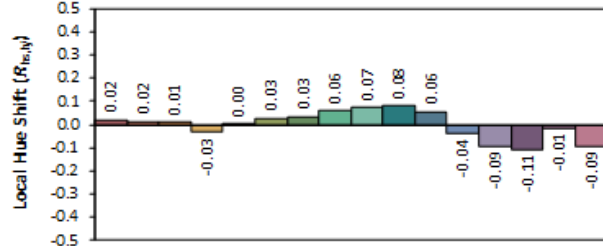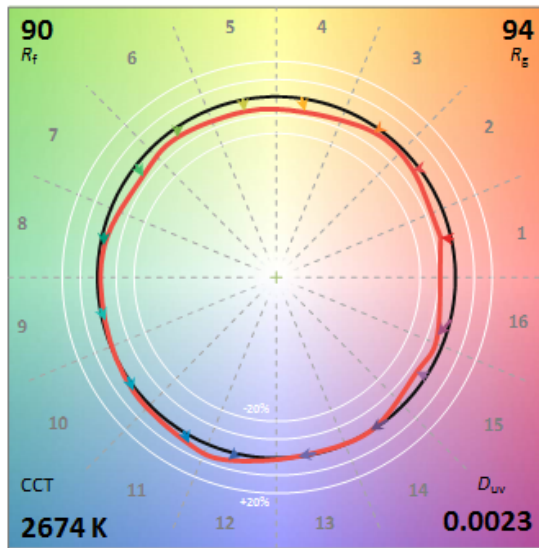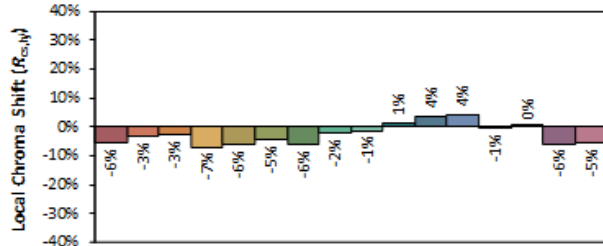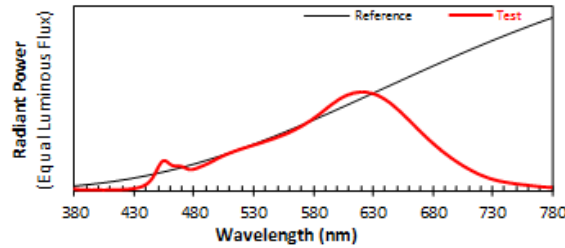

**Notes:** This is a recommended method for displaying ANSI/IES TM-30-18 information.


$x$  0.4660  
 $y$  0.4181  
 $u'$  0.2631  
 $v'$  0.5311

CIE 13.3-1995  
(CRI)

$R_a$  93  
 $R_g$  54

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.

### Relative Spectral Power Distribution

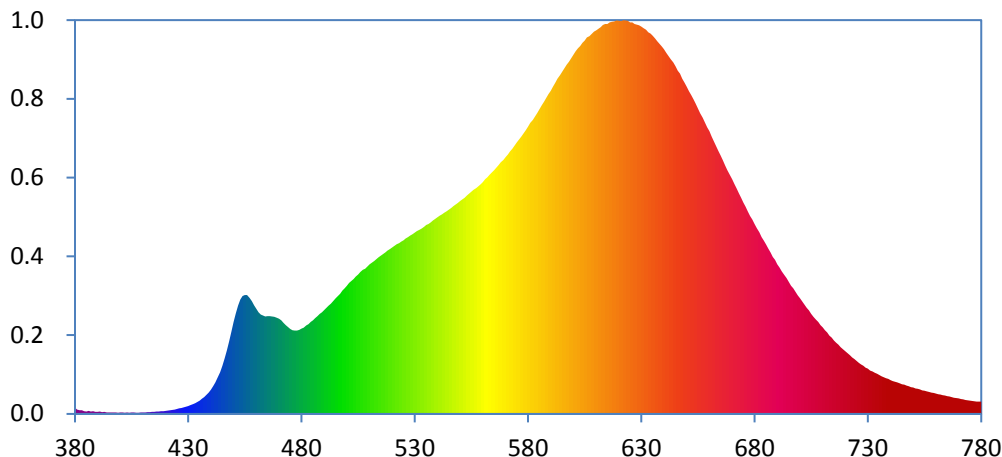


nm	mW	nm	mW	nm	mW	nm	mW	nm	mW
380	4.478E-01	421	2.450E-01	462	7.044E+00	503	9.558E+00	544	1.436E+01
381	3.070E-01	422	2.559E-01	463	6.962E+00	504	9.744E+00	545	1.448E+01
382	2.671E-01	423	2.807E-01	464	6.908E+00	505	9.879E+00	546	1.459E+01
383	2.623E-01	424	3.115E-01	465	6.915E+00	506	1.005E+01	547	1.471E+01
384	1.946E-01	425	3.466E-01	466	6.916E+00	507	1.020E+01	548	1.484E+01
385	1.664E-01	426	3.907E-01	467	6.910E+00	508	1.028E+01	549	1.495E+01
386	2.129E-01	427	4.281E-01	468	6.881E+00	509	1.044E+01	550	1.508E+01
387	1.736E-01	428	4.581E-01	469	6.819E+00	510	1.059E+01	551	1.519E+01
388	1.872E-01	429	5.163E-01	470	6.740E+00	511	1.070E+01	552	1.531E+01
389	1.507E-01	430	5.557E-01	471	6.623E+00	512	1.082E+01	553	1.546E+01
390	1.528E-01	431	6.215E-01	472	6.447E+00	513	1.097E+01	554	1.559E+01
391	1.608E-01	432	6.875E-01	473	6.291E+00	514	1.109E+01	555	1.574E+01
392	1.296E-01	433	7.676E-01	474	6.162E+00	515	1.119E+01	556	1.586E+01
393	1.439E-01	434	8.384E-01	475	6.016E+00	516	1.132E+01	557	1.599E+01
394	1.049E-01	435	9.414E-01	476	5.929E+00	517	1.143E+01	558	1.613E+01
395	1.094E-01	436	1.068E+00	477	5.910E+00	518	1.156E+01	559	1.626E+01
396	1.069E-01	437	1.187E+00	478	5.910E+00	519	1.168E+01	560	1.642E+01
397	1.045E-01	438	1.343E+00	479	5.959E+00	520	1.179E+01	561	1.662E+01
398	1.086E-01	439	1.508E+00	480	6.038E+00	521	1.190E+01	562	1.676E+01
399	8.671E-02	440	1.713E+00	481	6.109E+00	522	1.201E+01	563	1.694E+01
400	1.009E-01	441	1.961E+00	482	6.277E+00	523	1.209E+01	564	1.710E+01
401	1.024E-01	442	2.240E+00	483	6.349E+00	524	1.219E+01	565	1.725E+01
402	8.738E-02	443	2.568E+00	484	6.516E+00	525	1.229E+01	566	1.745E+01
403	1.067E-01	444	2.959E+00	485	6.639E+00	526	1.242E+01	567	1.762E+01
404	7.618E-02	445	3.423E+00	486	6.776E+00	527	1.252E+01	568	1.782E+01
405	1.004E-01	446	3.941E+00	487	6.923E+00	528	1.262E+01	569	1.799E+01
406	9.602E-02	447	4.499E+00	488	7.070E+00	529	1.273E+01	570	1.819E+01
407	8.917E-02	448	5.133E+00	489	7.195E+00	530	1.283E+01	571	1.836E+01
408	8.775E-02	449	5.819E+00	490	7.361E+00	531	1.296E+01	572	1.859E+01
409	1.027E-01	450	6.505E+00	491	7.503E+00	532	1.305E+01	573	1.876E+01
410	9.904E-02	451	7.129E+00	492	7.669E+00	533	1.312E+01	574	1.900E+01
411	1.012E-01	452	7.666E+00	493	7.810E+00	534	1.325E+01	575	1.922E+01
412	1.172E-01	453	8.097E+00	494	8.013E+00	535	1.338E+01	576	1.943E+01
413	1.252E-01	454	8.359E+00	495	8.191E+00	536	1.344E+01	577	1.963E+01
414	1.386E-01	455	8.417E+00	496	8.343E+00	537	1.357E+01	578	1.985E+01
415	1.376E-01	456	8.407E+00	497	8.513E+00	538	1.369E+01	579	2.009E+01
416	1.656E-01	457	8.207E+00	498	8.736E+00	539	1.380E+01	580	2.033E+01
417	1.698E-01	458	7.980E+00	499	8.899E+00	540	1.392E+01	581	2.061E+01
418	1.968E-01	459	7.692E+00	500	9.066E+00	541	1.404E+01	582	2.080E+01
419	1.913E-01	460	7.441E+00	501	9.270E+00	542	1.412E+01	583	2.106E+01
420	2.168E-01	461	7.202E+00	502	9.415E+00	543	1.424E+01	584	2.131E+01


nm	mW	nm	mW	nm	mW	nm	mW	nm	mW
585	2.158E+01	626	2.773E+01	667	1.759E+01	708	6.517E+00	749	1.897E+00
586	2.185E+01	627	2.761E+01	668	1.725E+01	709	6.290E+00	750	1.859E+00
587	2.211E+01	628	2.758E+01	669	1.693E+01	710	6.120E+00	751	1.813E+00
588	2.237E+01	629	2.752E+01	670	1.661E+01	711	5.926E+00	752	1.769E+00
589	2.265E+01	630	2.743E+01	671	1.628E+01	712	5.760E+00	753	1.726E+00
590	2.288E+01	631	2.731E+01	672	1.596E+01	713	5.550E+00	754	1.670E+00
591	2.316E+01	632	2.721E+01	673	1.562E+01	714	5.395E+00	755	1.634E+00
592	2.345E+01	633	2.703E+01	674	1.531E+01	715	5.190E+00	756	1.604E+00
593	2.373E+01	634	2.693E+01	675	1.498E+01	716	5.054E+00	757	1.547E+00
594	2.397E+01	635	2.677E+01	676	1.467E+01	717	4.898E+00	758	1.499E+00
595	2.424E+01	636	2.659E+01	677	1.434E+01	718	4.721E+00	759	1.494E+00
596	2.448E+01	637	2.639E+01	678	1.401E+01	719	4.575E+00	760	1.433E+00
597	2.473E+01	638	2.621E+01	679	1.375E+01	720	4.433E+00	761	1.399E+00
598	2.494E+01	639	2.602E+01	680	1.344E+01	721	4.285E+00	762	1.381E+00
599	2.518E+01	640	2.582E+01	681	1.315E+01	722	4.155E+00	763	1.331E+00
600	2.544E+01	641	2.558E+01	682	1.285E+01	723	4.007E+00	764	1.294E+00
601	2.567E+01	642	2.533E+01	683	1.253E+01	724	3.878E+00	765	1.251E+00
602	2.589E+01	643	2.511E+01	684	1.228E+01	725	3.759E+00	766	1.228E+00
603	2.605E+01	644	2.489E+01	685	1.199E+01	726	3.616E+00	767	1.185E+00
604	2.627E+01	645	2.463E+01	686	1.171E+01	727	3.503E+00	768	1.149E+00
605	2.642E+01	646	2.431E+01	687	1.143E+01	728	3.401E+00	769	1.121E+00
606	2.666E+01	647	2.410E+01	688	1.110E+01	729	3.271E+00	770	1.092E+00
607	2.676E+01	648	2.375E+01	689	1.090E+01	730	3.202E+00	771	1.060E+00
608	2.691E+01	649	2.347E+01	690	1.059E+01	731	3.074E+00	772	1.026E+00
609	2.708E+01	650	2.317E+01	691	1.037E+01	732	3.007E+00	773	9.917E-01
610	2.716E+01	651	2.285E+01	692	1.010E+01	733	2.908E+00	774	9.647E-01
611	2.726E+01	652	2.258E+01	693	9.870E+00	734	2.832E+00	775	9.434E-01
612	2.738E+01	653	2.228E+01	694	9.611E+00	735	2.749E+00	776	9.170E-01
613	2.754E+01	654	2.196E+01	695	9.349E+00	736	2.663E+00	777	8.869E-01
614	2.762E+01	655	2.163E+01	696	9.079E+00	737	2.596E+00	778	8.664E-01
615	2.762E+01	656	2.128E+01	697	8.884E+00	738	2.521E+00	779	8.675E-01
616	2.773E+01	657	2.097E+01	698	8.642E+00	739	2.471E+00	780	8.685E-01
617	2.776E+01	658	2.063E+01	699	8.401E+00	740	2.401E+00		
618	2.779E+01	659	2.029E+01	700	8.189E+00	741	2.335E+00		
619	2.786E+01	660	2.001E+01	701	7.970E+00	742	2.273E+00		
620	2.785E+01	661	1.965E+01	702	7.748E+00	743	2.221E+00		
621	2.782E+01	662	1.929E+01	703	7.512E+00	744	2.158E+00		
622	2.787E+01	663	1.896E+01	704	7.325E+00	745	2.105E+00		
623	2.785E+01	664	1.860E+01	705	7.090E+00	746	2.071E+00		
624	2.784E+01	665	1.829E+01	706	6.879E+00	747	2.013E+00		
625	2.773E+01	666	1.795E+01	707	6.682E+00	748	1.951E+00		





CIE 1931 x y Chromaticity Diagram

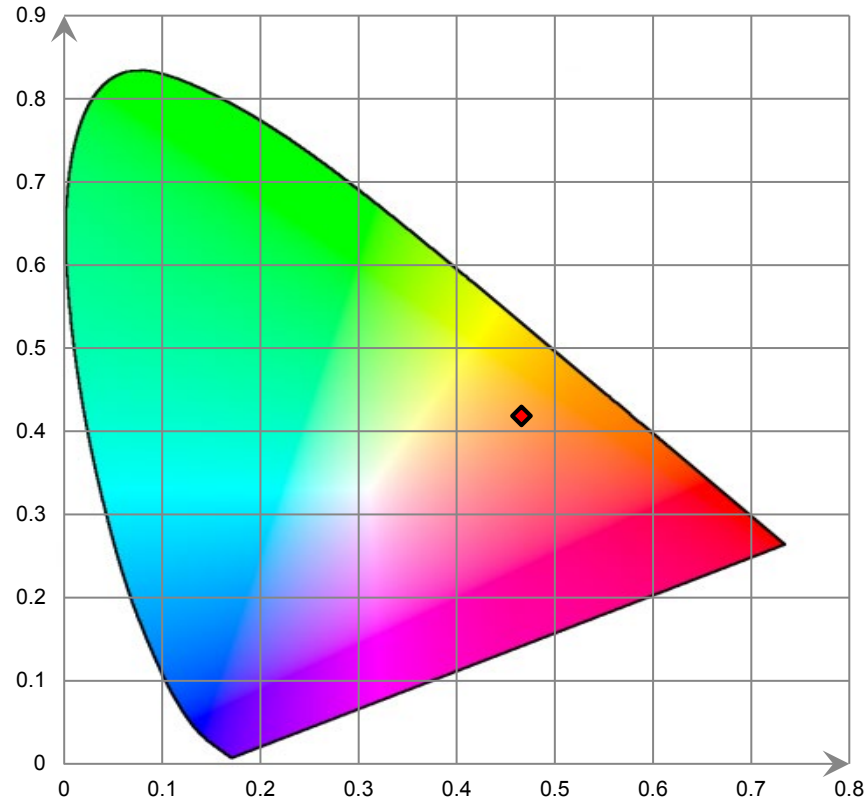

7-Step Chromaticity Quadrangles

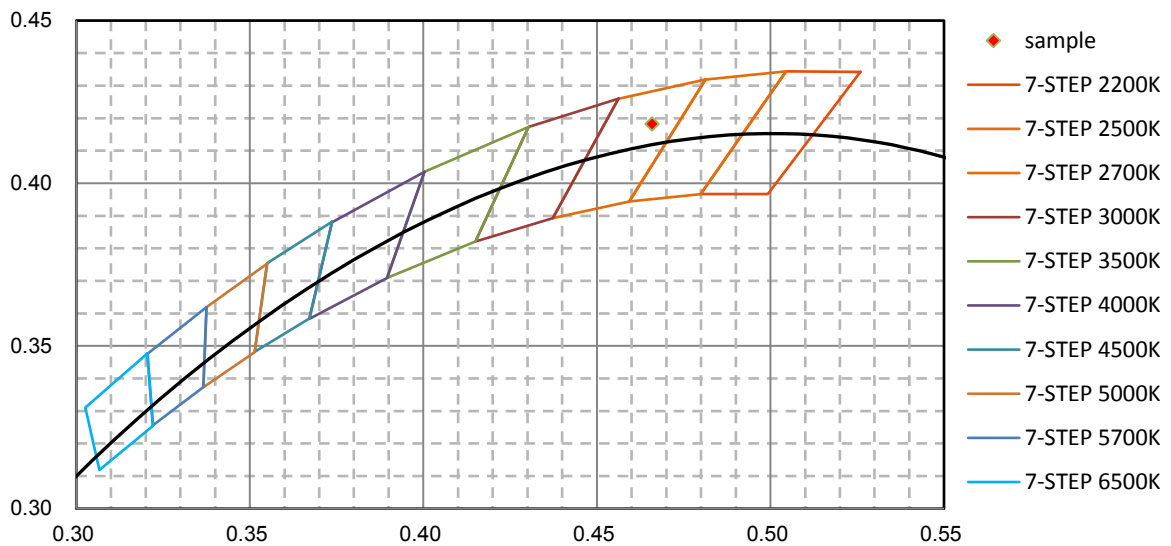

## 6. Product Photo

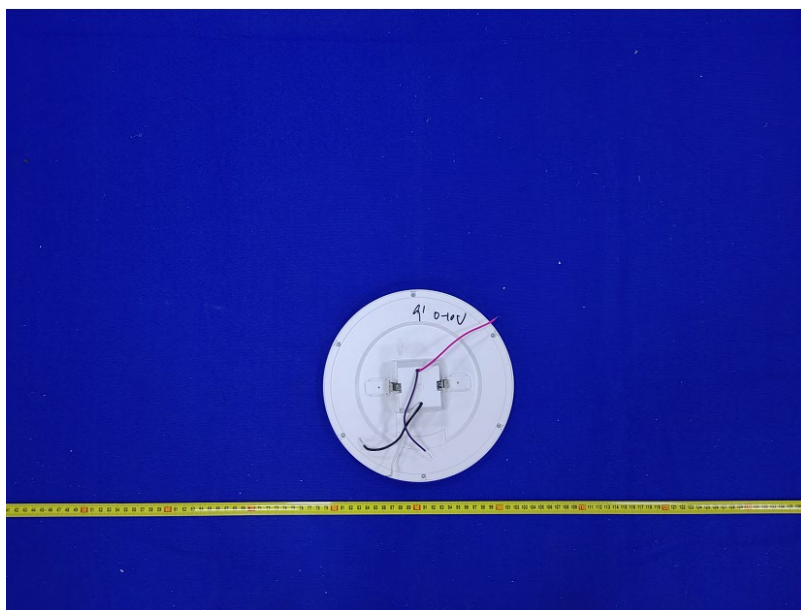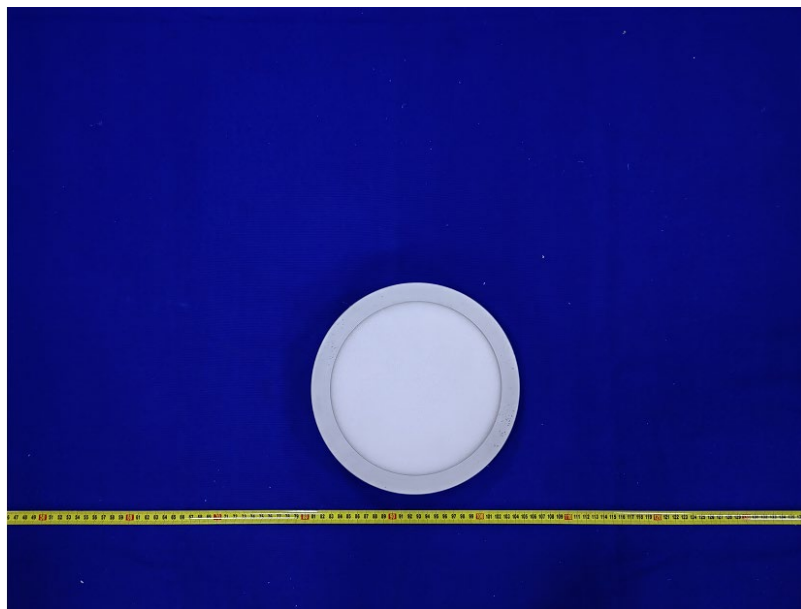

## Directions

1. The information marked "superscript #" is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.
2. This report includes some test methods are not in NVLAP accreditation scope marked \*.
3. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor  $K=2$  with the 95% confidence interval.
6. This report cannot be reproduced except in full, without prior written approval of the Company.
7. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

\*\*\*\*\*END OF REPORT\*\*\*\*\*