


NEW CONSTRUCTION SPECFIT SERIES



Powered by SelectDrive and TRUE CHROMA technology, SpecFit New Construction fixtures provide consistent, high quality lighting that can meet the most demanding lighting applications. The flexible, field changeable SpecFit platform provides options in fixture sizes, lumen outputs, optics, trim finishes, and fixture controls making it an ideal solution for commercial, educational, hospitality and retail construction projects.

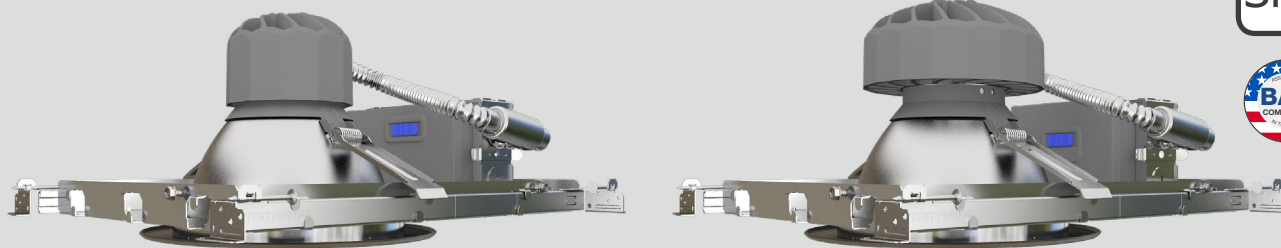

SPECIFICATIONS

Light Engine and Driver

| Frame Housing | Light Engines | CRI | CCT | Driver | Optical Distribution | Options | |
|---|--|-----------------------------------|--|---|--|--|---|
| SPFTR4 4" SPECFIT Round New Construction | SelectDrive Light Engines LES Small Light Engine 500-700-1000 lumens | 90 90+ CRI | 27 2700K | SelectDrive Drivers KDIM120V 120V, 50/60Hz Forward/Reverse Phase dimming | MD Medium 60° (Installed Standard) | SD347 347V - 240V Step Down Transformer | |
| SPFTR6 6" SPECFIT Round New Construction | LEM Medium Light Engine 1500-2000-2500 lumens | 97 97 CRI 3000K only | 30 3000K | KDIM010UNV SelectDrive 120-277V,50/60Hz 0-10V dimming | VN Very Narrow 25° | EM 10.7W Emergency Backup | |
| SPFTR8 8" SPECFIT Round New Construction | LEL Large Light Engine 3000-4000-5000 lumens | | 35 3500K | Fixed Output Drivers PSRUNV 0-10V Driver + SR Ready Bridge, 120-277V | NR Narrow 40° | EM[®]-CEC California Title 20 Compliant 10.7W Emergency Backup | |
| SPFTR9.5 9.5" SPECFIT Round New Construction | Fixed Output Light Engines LE05 500 lumens LE07 700 lumens LE10 1000 lumens LE15 1500 lumens LE20 2000 lumens LE25 2500 lumens LE30 3000 lumens LE40 4000 lumens LE50 5000 lumens | | 40 4000K 50 5000K | XT010UNV Signify 0-10V Driver 1% Dimming, 120-277V LUT-1UNV Lutron EcoSystem 1% Dimming, 120-277V LUT-5UNV Lutron EcoSystem 5% Dimming, 120-277V LUT-L3DUNV Lutron Hi-lume 3-Wire 1% Dimming, 120-277V | ELD-E010UNV EldoLED ECOdrive 0-10V 1%, 120-277V ELD-EDALIUNV EldoLED ECOdrive DALI 1%, 120-277V ELD-S010UNV EldoLED SOLOdrive 0-10V 0.1%, 120-277V ELD-SDALIUNV EldoLED SOLOdrive DALI 0.1%, 120-277V | WD Wide 75° | OUT Outdoor Debris Ingress Protection ES Philips EasySense ceiling mount sensor ENLS-IL Enlighted Two Wire ENLIGHTED ONE Compact Sensor ENLS-CL Enlighted Two Wire CONNECTED LIGHTING Compact Sensor ENLS-IOT Enlighted Two Wire IOT Compact Sensor |

Reflector

| Shape & Size | | Finish | |
|-------------------------|-----------------------------|---|--|
| ADR4 4" Round | ADR6 6" Round | CC Clear Diffuse Trim and Flange | WH Matte White Trim and Flange |
| ADR8 8" Round | ADR9.5 9.5" Round | CW Clear Diffuse Trim, White Flange | BL[®] Matte Black Trim and Flange |




Office



Retail

NEW CONSTRUCTION FRAME

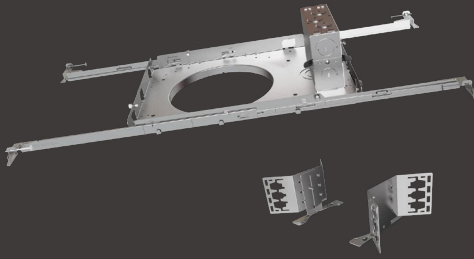

The SPECFIT new construction frames, made of the highest quality galvanized steel, are designed to be installed in suspended T-grid or wood joist ceilings. The low profile bar hangers with non-pass through construction and leveling flanges contain an integral tee bar clip and preinstalled nail, quick and safe installation in standard 2x2' and 2x4' suspended ceilings. The attached junction box and prewired driver, with quick connect MC cable allows for easy fixture wiring. Optional field installable butterfly brackets are also available for C-Channel or conduit suspension. EM unit can be factory installed on demand with a specifically designed bracket.

SELECTDRIVE DRIVERS

SPECFIT luminaires come standard with SelectDrive technology, which allows for field selection of lumen output. Select from three different lumen output levels by sliding the selector switch on top of the 0-10V dimming driver with low end cutoff. A standard 12V auxiliary port with stand-by power function allow for additional field installation of sensors or control systems, offering even more lighting design flexibility.



TAKE THE CONTROL

Take even more control of SPECFIT fixtures with a variety of control system options. These include the Lutron 5-Series Ecosystem driver which provides smooth dimming to 5% and the Lutron Hi-Lume 1% EcoSystem driver with Soft-On, Fade-to-Black which dims to 1%. EldoLED ECOdrive and SOLOdrive drivers available in 0-10V and DALi configurations and dim smoothly to 1% and 0.1% respectively. Additional sensors such as enlightened compact sensors and Philips EasySense sensors, can be field installed and directly integrate with the factory provided Philips Xitanium driver and Sensor Ready Bridge.

TRUE CHROMA

SPECFIT, powered by TRUE CHROMA technology, has the highest color accuracy standard in the market. TRUE CHROMA starts with a maximum 3 step SDCM LED light source. Then, based on the traditional CRI and new IES TM-30-15 standards, TRUE CHROMA delivers CRI ≥ 95, R9 ≥ 50 and Rf ≥ 93. Rest assured that new spaces lit with SPECFIT fixtures powered by TRUE CHROMA will look their best.



REFLECTORS

The sturdy self-flanged spun aluminum reflector is manufactured with performance in mind. All reflectors are designed with up to 45° optical cut off to help minimize aperture brightness in the ceiling and reduce glare. The standard Clear Diffuse, Matte White or Matte Black finishes compliment almost any ceiling color. White painted flange is also available with Clear Diffuse for complete ceiling matching. The reflector's spring action clips allow for a secure installation in ceilings up from 1/2" to 2" thick. The multiple choice of beam angles thanks to its field interchangeable lenses allow for even more design flexibility.