

Project Name:	Type:
Part Number:	Date:



GREENCREATIVE

# SPECFIT 9.5" NEW CONSTRUCTION

## SPECIFICATION FEATURES

- **Mechanical** - Galvanized steel plaster frame. Low profile bar hangers with non-pass through construction and leveling flanges contain integral tee bar clip and preinstalled nail. Bar hangers are adjustable from 13-1/4" to 24-1/2" and can be installed in suspended T-Grid or wood joist ceilings. Attached junction box with quick connect MC cable allows for easy fixture wiring. The reflector's spring action clips allow for a secure installation in ceilings from 1/2" to 2" thick.
- **Electrical** - Two selectable lumen output driver options with SelectDrive technology. The 120V, 50/60 Hz driver is forward or reverse phase dimmable to 5%. The 120-277V, 50/60 Hz driver is 0-10V dimmable to 5% with a low end cutoff and comes with a 12V auxiliary port that provides power for field installed sensors and control modules. Static lumen output driver options include the Lutron 5-Series Ecosystem driver which provides smooth dimming to 5% and the Lutron Hi-Lume 1% EcoSystem driver with Soft-On, Fade-to-Black which dims to 1%. EldoLED ECOdrive and SOLOdrive drivers are available in 0-10V and DALi configurations and dim smoothly to 1% and 0.1% respectively. Enlighted compact sensors and Philips EasySense sensors are field installable and directly integrate with the factory provided Philips Xitanium driver and Sensor Ready Bridge.
- **Optical** - Self-flanged spun aluminum reflector. 45° optical cutoff. Field interchangeable optical lenses. Four beam distributions range from 25° - 75°. Wall wash field installed accessory. COB LED binned to 3-step SDCM to ensure color uniformity in 2700K, 3000K, 3500K, 4000K or 5000K CCT. Minimum 90 CRI. 97 CRI with TRUE CHROMA available in 3000K only.
- **Thermal** - Die cast heat sink. L70 lifetime of 100,000 hours. Fixture operating temperature: -13°F to +95°F (-25°C to 35°C).
- **Compliance and Warranty** - ETL Listed for Damp locations. Suitable for exterior under canopy mounting when utilizing OUT Outdoor Debris Ingress Protection option. 5 year parts warranty for complete fixture. Optional 10 Year Extended Warranty available, subject to same terms, conditions and installation requirements as standard 5 Year Warranty.



070221



## BENEFITS



- Get the right amount of light with SelectDrive technology
- Fits standard 2x2 & 2x4 T-Grids and up to 24" wood joist spacing
- Multiple reflector finish options facilitate any décor
- Field interchangeable optics ensure smooth light levels
- Large variety of dimming and sensor control options
- Exceptional color rendering and uniformity

## APPLICATIONS

- Commercial Office
- Hospitality
- Retail
- Educational
- Healthcare
- Exterior Under Canopy\*

\*Applicable with OUT Outdoor Debris Ingress Protection option.

## DIMENSIONS

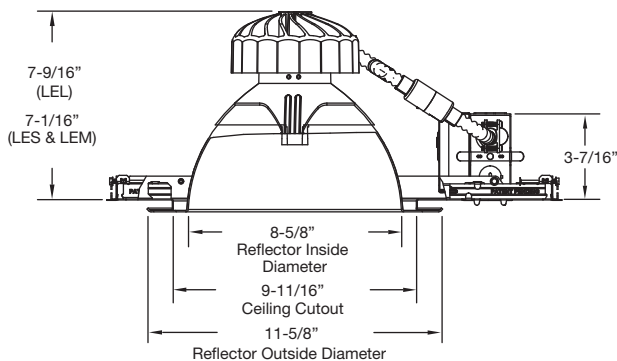





# SPECFIT 9.5" NEW CONSTRUCTION

## DIMENSIONS


with / Sensor

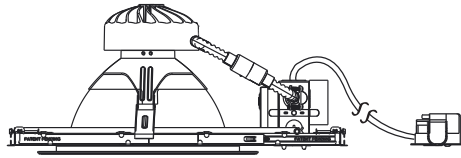


Philips EasySense sensor shown.  
Enlighted compact sensor also available.

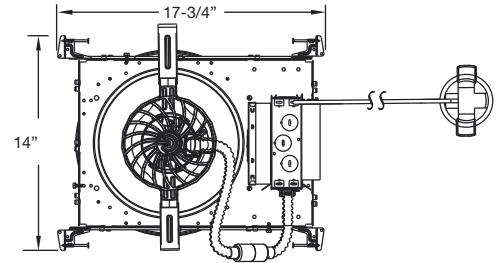

with / EM

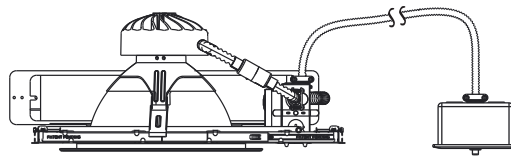

EM Test Switch shown.  
Single gang j-box by others.

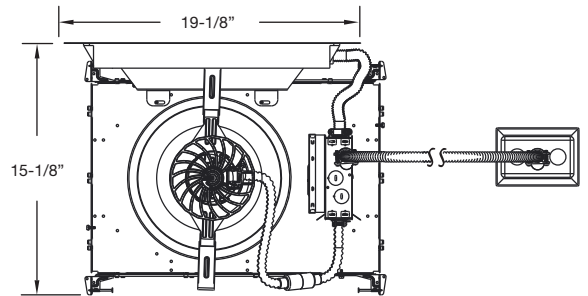

## ORDERING EXAMPLE

A complete fixture consists of one light engine and one reflector.

SelectDrive Light Engine: SPFTR9.5/LEL9035/KDIM010UNV/MD/OUT/EM  
Reflector: ADR9.5CC

### SelectDrive Light Engines

Frame Housing	Light Engine	CRI	CCT	Driver	Optical Distribution	Options <sup>7</sup>
<input type="checkbox"/> <b>SPFTR9.5</b> SPECFIT Round New Construction 9.5"	<input type="checkbox"/> <b>LES</b> Small Light Engine 500-700-1000 lumens	<input type="checkbox"/> <b>90</b> 90+ CRI	<input type="checkbox"/> <b>27</b> 2700K	<input type="checkbox"/> <b>KDIM120V</b> SelectDrive 120V, 50/60Hz Forward/Reverse Phase dimming	<input type="checkbox"/> <b>MD<sup>1</sup></b> Medium (Installed Standard) 60° Beam angle	<input type="checkbox"/> <b>SD347</b> 347V - 240V Step Down Transformer
	<input type="checkbox"/> <b>LEM</b> Medium Light Engine 1500-2000-2500 lumens	<input type="checkbox"/> <b>97<sup>3</sup></b> 97 CRI 3000K True Chroma	<input type="checkbox"/> <b>30</b> 3000K	<input type="checkbox"/> <b>KDIM010UNV<sup>2</sup></b> SelectDrive 120-277V, 50/60Hz 0-10V dimming	<input type="checkbox"/> <b>VN</b> Very Narrow 25° Beam angle	<input type="checkbox"/> <b>EM<sup>4</sup></b> 10W Pre-installed Emergency Backup
	<input type="checkbox"/> <b>LEL</b> Large Light Engine 3000-4000-5000 lumens		<input type="checkbox"/> <b>35</b> 3500K		<input type="checkbox"/> <b>NR</b> Narrow 40° Beam angle	<input type="checkbox"/> <b>EM<sup>4</sup>-CEC</b> 10W Pre-installed Emergency Backup California Compliant
			<input type="checkbox"/> <b>40</b> 4000K		<input type="checkbox"/> <b>WD</b> Wide 75° Beam angle	<input type="checkbox"/> <b>OUT</b> Outdoor Debris Ingress Protection
			<input type="checkbox"/> <b>50</b> 5000K			

### Reflectors

Shape	Finish
<input type="checkbox"/> <b>ADR9.5</b> 9.5" Round Reflector	<input type="checkbox"/> <b>CC</b> Clear Diffuse Trim and Flange  <input type="checkbox"/> <b>WH</b> Matte White Trim and Flange
	<input type="checkbox"/> <b>CW</b> Clear Diffuse Trim, White Flange

<sup>1</sup> Medium Lens Optic comes installed as standard, if other optic distribution selected the lens will ship separately and require field installation. / <sup>2</sup> Dims to 5% with low end cutoff. Dimmer compatibility available on website. / <sup>3</sup> CRI97 TRUE CHROMA is only available in 3000K only and is not Energy Star rated. It is made to order (MTO) for the lumen values of 3000 and above, including the LEL light engine. / <sup>4</sup> EM cannot be combined with SD347 or SD480 option / <sup>7</sup> Options are factory installed and come with the Light Engine and Driver.



# SPECFIT 9.5" NEW CONSTRUCTION

## ORDERING EXAMPLE

A complete fixture consists of one light engine and one reflector.

Philips Light Engine W/ Enlighted Micro Sensor: SPFTR9.5/LE25/9040/PSRUNV/VN/ENLS-IOT Reflector: ADR9.5CC	Lutron EcoSystem Light Engine: SPFTR9.5/LE15/9027/LUT-5UNV/NR Reflector: ADR9.5BL
Philips Light Engine W/ EasySense Sensor: SPFTR9.5/LE50/9030/PSRUNV/VN/ES Reflector: ADR9.5CW	EldoLED Light Engine SOLOdrive: SPFTR9.5/LE20/9035/ELD-S010UNV/WD Reflector: ADR9.5WH

## ORDERING INFORMATION

### Fixed Output Light Engines

Frame Housing	Light Engine	CRI	CCT	Driver	Optical Distribution	Options <sup>7</sup>
<input type="checkbox"/> <b>SPFTR9.5</b> SPECFIT Round New Construction 9.5"	<input type="checkbox"/> <b>LE05<sup>8</sup></b> 500 lumens	<input type="checkbox"/> <b>90</b> 90+CRI	<input type="checkbox"/> <b>27</b> 2700K	<input type="checkbox"/> <b>PSRUNV</b> Signify 0-10V Driver + Sensor Ready Bridge, 1% Dimming, 120-277V	<input type="checkbox"/> <b>MD<sup>1</sup></b> Medium (Installed Standard) 60° Beam angle	<input type="checkbox"/> <b>SD347</b> 347V - 240V Step Down Transformer
	<input type="checkbox"/> <b>LE07</b> 700 lumens	<input type="checkbox"/> <b>97<sup>3</sup></b> 97 CRI 3000K True Chroma	<input type="checkbox"/> <b>30</b> 3000K	<input type="checkbox"/> <b>LUT-1UNV</b> Signify 0-10V Driver 1% Dimming, 120-277V	<input type="checkbox"/> <b>VN</b> Very Narrow 25° Beam angle	<input type="checkbox"/> <b>EM<sup>4</sup></b> 10.7W Emergency Backup
	<input type="checkbox"/> <b>LE10</b> 1,000 lumens		<input type="checkbox"/> <b>35</b> 3500K	<input type="checkbox"/> <b>XT010UNV</b> Lutron EcoSystem 1% Dimming, 120-277V	<input type="checkbox"/> <b>NR</b> Narrow 40° Beam angle	<input type="checkbox"/> <b>EM<sup>4</sup> -CEC</b> California Title 20 Compliant 10.7W Emergency Backup
	<input type="checkbox"/> <b>LE15</b> 1,500 lumens		<input type="checkbox"/> <b>40</b> 4000K	<input type="checkbox"/> <b>LUT-5UNV</b> Lutron EcoSystem 5% Dimming, 120-277V	<input type="checkbox"/> <b>WD</b> Wide 75° Beam angle	<input type="checkbox"/> <b>ES<sup>5</sup></b> Philips EasySense ceiling mount sensor
	<input type="checkbox"/> <b>LE20</b> 2,000 lumens		<input type="checkbox"/> <b>50</b> 5000K	<input type="checkbox"/> <b>LUT-L3DUNV</b> Lutron Hi-Lume 3-Wire 1% Dimming, 120-277V		<input type="checkbox"/> <b>ENLS<sup>6</sup>-IL</b> Enlighted Two Wire <b>ENLIGHTED ONE</b> Compact Sensor
	<input type="checkbox"/> <b>LE25</b> 2,500 lumens			<input type="checkbox"/> <b>ELD-E010UNV</b> EldoLED ECOdrive 0-10V 1%, 120-277V		<input type="checkbox"/> <b>ENLS<sup>6</sup>-CL</b> Enlighted Two Wire <b>CONNECTED LIGHTING</b> Compact Sensor
	<input type="checkbox"/> <b>LE30</b> 3,000 lumens			<input type="checkbox"/> <b>ELD-EDALIUNV</b> EldoLED ECOdrive DALI 1%, 120-277V		<input type="checkbox"/> <b>ENLS<sup>6</sup>-IOT</b> Enlighted Two Wire <b>IOT</b> Compact Sensor
	<input type="checkbox"/> <b>LE40</b> 4,000 lumens			<input type="checkbox"/> <b>ELD-S010UNV</b> EldoLED SOLOdrive 0-10V 0.1%, 120-277V		<input type="checkbox"/> <b>OUT</b> Outdoor Debris Ingress Protection
	<input type="checkbox"/> <b>LE50<sup>9</sup></b> 5,000 lumens			<input type="checkbox"/> <b>ELD-SDALIUNV</b> EldoLED SOLOdrive DALI 0.1%, 120-277V		

### Reflectors

Shape	Finish
<input type="checkbox"/> <b>ADR9.5</b> 9.5" Round Reflector	<input type="checkbox"/> <b>CC</b> Clear Diffuse Trim and Flange
	<input type="checkbox"/> <b>WH</b> Matte White Trim and Flange
	<input type="checkbox"/> <b>CW</b> Clear Diffuse Trim, White Flange

<sup>1</sup> Medium Lens Optic comes installed as standard, if other optic distribution selected the lens will ship separately and require field installation / <sup>3</sup> CRI97 TRUE CHROMA is only available in 3000K only. It is made to order (MTO) for the lumen values of 3000 and above, including the LEL light engine. / <sup>4</sup> EM cannot be combined with SD347 or SD480 option / <sup>5</sup> Philips EasySense ceiling mounted sensor is only available with the PSRUNV driver / <sup>6</sup> Enlighted Two Wire Compact Sensor with ceiling mount is only available with the PSRUNV driver. / <sup>7</sup> Options are factory installed and come with the Light Engine and Driver. / <sup>8</sup> LE05 is not available with LUT-5UNV / <sup>9</sup> LE50 is not available with LUT-5UNV and LUT-1UNV.



# SPECFIT 9.5" NEW CONSTRUCTION

ACCESSORY ORDERING INFORMATION				
Product	Model	Description	Pictures	Dimensions
98079	ADWAW	Wall Wash (Field Installed on Lens)		
35126	NCFBFB	Set of Two Field Installable Butterfly Brackets For New Construction Rough-in Frame		
35125	NCFEMB	Field Installable Emergency Bracket For New Construction Rough-in Frame		

## 10 YEAR EXTENDED WARRANTY

Model	SPFTR9.5 / LE <sub>xx</sub> / 10YEARWARRANTY*
<p>*Where xx = Fixture Light Engine lumen output designation.          Example: 10 Year Warranty Part Number for SPFTR9.5/LEM or SPFTR9.5/LE20 Light engine is SPFTR9.5/LEM/10YEARWARRANTY and SPFTR9.5/LE20/10YEARWARRANTY respectively.</p>	



# SPECFIT 9.5" NEW CONSTRUCTION

## TECHNICAL INFORMATION

Light Engine	Input Voltage	Input Frequency	Input Current	Input Power	THD Power	Power Factor
LESXXXX	120 / 277V	50 / 60Hz	0.115 / 0.047A	13W	<20%	>0.9
LEMXXXX	120 / 277V	50 / 60Hz	0.270 / 0.114A	31.5W	<20%	>0.9
LELXXXX	120 / 277V	50 / 60Hz	0.530 / 0.217A	60W	<20%	>0.9
LE05XXXX	120 / 277V	50 / 60Hz	0.056 / 0.024A	6.5W	<20%	>0.9
LE07XXXX	120 / 277V	50 / 60Hz	0.073 / 0.034A	8.5W	<20%	>0.9
LE10XXXX	120 / 277V	50 / 60Hz	0.112 / 0.047A	13W	<20%	>0.9
LE15XXXX	120 / 277V	50 / 60Hz	0.154 / 0.068A	18W	<20%	>0.9
LE20XXXX	120 / 277V	50 / 60Hz	0.218 / 0.092A	25.5W	<20%	>0.9
LE25XXXX	120 / 277V	50 / 60Hz	0.269 / 0.116A	31.5W	<20%	>0.9
LE30XXXX	120 / 277V	50 / 60Hz	0.318 / 0.133A	37.5W	<20%	>0.9
LE40XXXX	120 / 277V	50 / 60Hz	0.411 / 0.165A	48.5W	<20%	>0.9
LE50XXXX	120 / 277V	50 / 60Hz	0.487 / 0.203A	57.5W	<20%	>0.9

## NOMINAL PERFORMANCE

### LES (LE05 / LE07 / LE10) - Low / Medium / High - 6.5 / 8.5 / 13W

CCT	2700K			3000K			3500K			4000K			5000K																	
	Low	Medium	High	Low	Medium	High	Low	Medium	High	Low	Medium	High	Low	Medium	High															
Output**	Im	LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW															
Clear Diffuse	500	77	700	82	1000	80	525	81	735	86	1,050	84	550	85	770	91	1,100	88	575	88	805	95	1,150	92	580	89	810	95	1,165	93
White	495	76	693	82	990	79	520	80	728	86	1,040	83	545	84	762	90	1,089	87	569	88	797	94	1,139	91	574	88	802	94	1,153	92
Black	440	68	616	72	880	70	462	71	647	76	924	74	484	74	678	80	968	77	506	78	708	83	1,012	81	510	78	714	84	1,015	81

### LEM (LE15 / LE20 / LE25) - Low / Medium / High - 18.0 / 25.5 / 31.5W

CCT	2700K			3000K			3500K			4000K			5000K																	
	Low	Medium	High	Low	Medium	High	Low	Medium	High	Low	Medium	High	Low	Medium	High															
Output**	Im	LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW															
Clear Diffuse	1,600	89	2,125	83	2,500	79	1,632	91	2,169	85	2,550	81	1,664	92	2,210	87	2,600	83	1,696	94	2,253	88	2,650	84	1,713	95	2,275	89	2,677	85
White	1,584	88	2,104	82	2,475	78	1,616	90	2,147	84	2,525	80	1,647	91	2,188	86	2,574	82	1,679	93	2,230	87	2,624	83	1,696	94	2,252	88	2,650	84
Black	1,408	78	1,870	73	2,200	70	1,436	80	1,909	75	2,244	71	1,464	81	1,945	77	2,288	73	1,492	83	1,983	77	2,332	74	1,507	84	2,002	79	2,355	75

### LEL (LE30 / LE40 / LE50) - Low / Medium / High - 37.5 / 48.5 / 60.0W

CCT	2700K			3000K			3500K			4000K			5000K																	
	Low	Medium	High	Low	Medium	High	Low	Medium	High	Low	Medium	High	Low	Medium	High															
Output**	Im	LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW	Im LPW															
Clear Diffuse	3,325	89	4,085	84	4,750	79	3,360	90	4,080	84	4,800	80	3,500	93	4,250	88	5,000	83	3,640	97	4,420	91	5,200	87	3,640	97	4,420	91	5,200	87
White	3,292	88	4,044	83	4,703	78	3,326	89	4,039	83	4,752	79	3,465	92	4,208	87	4,950	82	3,604	96	4,376	90	5,148	86	3,604	96	4,376	90	5,148	86
Black	2,826	78	3,472	71	4,038	67	2,856	77	3,468	71	4,080	68	2,975	79	3,613	75	4,250	71	3,094	82	3,757	77	4,420	74	2,829	75	3,757	77	4,420	74


\*\* Lumen output are based on rated lumens, for exact value please refer to the IES files



# SPECFIT 9.5" NEW CONSTRUCTION

## PHOTOMETRY


SPFTR9.5-LEM9035-KDIM010-UNV-VN-ADR9.5CC



Lumens: 2,575 lm  
 Power: 31.0 W  
 Efficacy: 83 lm/W  
 CRI: 90+  
 Spacing Criteria: 0.4  
 Beam Angle: 24°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	2,193	4	607	1.7	0-30	2,231	91%
20	689	6	270	2.6	0-40	2,418	99%
30	79	8	152	3.4	0-60	2,448	100%
40	6	10	97	4.3	0-90	2,452	100%
50	2	12	67	5.1			
60	1						
70	0						
80	0						
90	0						


SPFTR9.5-LEM9035-KDIM010-UNV-NR-ADR9.5CC



Lumens: 2,584 lm  
 Power: 31.4 W  
 Efficacy: 82 lm/W  
 CRI: 90+  
 Spacing Criteria: 0.7  
 Beam Angle: 42°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	4,949	4	300	2.7	0-30	2,307	89%
20	2,507	6	134	4.0	0-40	2,555	99%
30	909	8	75	5.4	0-60	2,579	100%
40	86	10	48	6.7	0-90	2,584	100%
50	6	12	33	8.1			
60	2						
70	1						
80	0						
90	0						

SPFTR9.5-LEM9035-KDIM010-UNV-MD-ADR9.5CC



Lumens: 2,530 lm  
 Power: 31 W  
 Efficacy: 81.6 lm/W  
 CRI: 90+  
 Spacing Criteria: 0.9  
 Beam Angle: 61°


Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	2,662	8	167	3.6	0-30	2,018	80%
20	2,602	10	74	5.5	0-40	2,470	98%
30	1,244	12	42	7.3	0-60	2,525	100%
40	326	15	27	9.1	0-90	2,530	100%
50	9	20	19	11.0			
60	3						
70	1						
80	0						
90	0						



# SPECFIT 9.5" NEW CONSTRUCTION

## PHOTOMETRY


SPFTR9.5-LEM9035-KDIM010-UNV-WD-ADR9.5CC



Lumens: 2,592 lm  
 Power: 31.4 W  
 Efficacy: 83lm/W  
 CRI: 90+  
 Spacing Criteria: 1.2  
 Beam Angle: 81°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	1,510	4	121	6.0	0-30	1,290	50%
20	1,368	6	54	9.0	0-40	2,313	89%
30	1,994	8	30	12.1	0-60	2,582	100%
40	1,061	10	19	15.1	0-90	2,592	100%
50	27	12	13	18.1			
60	9						
70	4						
80	1						
90	0						


SPFTR9.5-LEL9035-KDIM010-UNV-VN-ADR9.5CC



Lumens: 4,806 lm  
 Power: 60.7 W  
 Efficacy: 83 lm/W  
 CRI: 90+  
 Spacing Criteria: 0.5  
 Beam Angle: 31°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	781	4	175	4.5	0-30	3,978	83%
20	453	6	112	5.6	0-40	4,701	98%
30	236	8	78	6.7	0-60	4,790	100%
40	25	10	50	8.4	0-90	4,806	100%
50	3	12	28	11.2			
60	1						
70	1						
80	0						
90	0						

SPFTR9.5-LEL9035-KDIM010-UNV-NR-ADR9.5CC



Lumens: 4,889 lm  
 Power: 60.4 W  
 Efficacy: 81 lm/W  
 CRI: 90+  
 Spacing Criteria: 0.6  
 Beam Angle: 43°


Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	7,797	8	146	6.2	0-30	3,978	83%
20	5,436	10	93	7.8	0-40	4,701	98%
30	2,401	12	65	9.4	0-60	4,790	100%
40	467	15	41	11.7	0-90	4,889	100%
50	22	20	23	15.6			
60	8						
70	3						
80	1						
90	0						



# SPECFIT 9.5" NEW CONSTRUCTION

## PHOTOMETRY

SPFTR9.5-LEL9035-KDIM010-UNV-MD-ADR9.5CC




Lumens: 5,090 lm  
Power: 61.2 W  
Efficacy: 83 lm/W  
CRI: 90+  
Spacing Criteria: 0.7  
Beam Angle: 51°

Candlepower Distribution	
Angle (°)	Average (cd)
10	5,884
20	4,239
30	2,966
40	723
50	22
60	8
70	3
80	1
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
4	111	7.5
6	71	9.4
8	49	11.2
10	32	14.1
12	18	18.7

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	3,680	72%
0-40	4,920	97%
0-60	5,077	100%
0-90	5,090	100%

SPFTR9.5-LEL9035-KDIM010-UNV-WD-ADR9.5CC



Lumens: 5,103 lm  
Power: 61.3 W  
Efficacy: 83 lm/W  
CRI: 90+  
Spacing Criteria: 1.1  
Beam Angle: 81°

Candlepower Distribution	
Angle (°)	Average (cd)
10	3,929
20	3,712
30	3,213
40	1,668
50	51
60	18
70	8
80	3
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
4	71	12.0
6	46	15.0
8	32	18.0
10	20	22.5
12	11	30.0

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	3,096	61%
0-40	4,668	92%
0-60	5,081	100%
0-90	5,103	100%






# SPECFIT 9.5" NEW CONSTRUCTION

## PHOTOMETRY


SPFTR9.5-LEM9730-KDIM010-UNV-MD-ADR9.5CC



Lumens: 2,212 lm  
 Power: 33 W  
 Efficacy: 68 lm/W  
 CRI: 96  
 Spacing Criteria: 0.97  
 Beam Angle: 63°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	2,030	4	189	4.9	0-30	1,542	70%
20	986	6	84	7.4	0-40	2,089	94%
30	1,274	8	47	9.8	0-60	2,211	100%
40	422	10	30	12.3	0-90	2,212	100%
50	4	12	21	14.7			
60	1						
70	0						
80	0						
90	0						

SPFTR9.5-LEL9730-KDIM010-UNV-MD-ADR9.5CC



Lumens: 4,224 lm  
 Power: 60 W  
 Efficacy: 70 lm/W  
 CRI: 96  
 Spacing Criteria: 0.69  
 Beam Angle: 48°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	4,512	4	419	3.6	0-30	2,852	68%
20	1,844	6	186	5.4	0-40	3,976	94%
30	2,365	8	105	7.2	0-60	4,224	100%
40	1,005	10	67	8.9	0-90	4,224	100%
50	7	12	47	10.7			
60	0						
70	0						
80	0						
90	0						