





























# TRACK LIGHTING SELECTION GUIDE




SELECTION GUIDE					
Size		S (2")	S (2"), M (3"), L (4")	PAR20, PAR30, PAR38	Unique
Application	Retail				
	Residential				
	Hospitality				
	Offices				
	Libraries and Museums				
Specifications	Power	7 / 11W	Selectable 7 / 10W, 15 / 20W, 30 / 40W	6.5W to 15.5W (Depending on PAR lamp)	Selectable 30 / 40 / 50W
	CCT	27K / 30K / 35K / 40K	27K / 30K / 35K / 40K	27K / 30K / 35K / 40K (Depending on PAR lamp)	Selectable 30K / 35K / 40K
	CRI (min.)	90	92	90 or 95 (Depending on PAR lamp)	90
	SDCM LED binning (max.)	3-Steps	2-Steps	3 to 7-Steps (Depending on PAR lamp)	3-Steps
	Lumen @30K	700 / 1100 lm	Selectable 700 / 1000lm, 1500 / 1900lm, 2850 / 3800lm	520 to 1420lm (Depending on PAR lamp)	Selectable 3000 / 4000 / 5000lm
	Efficacy @30K	102 / 98 LPW	100 / 95 / 100 LPW	80 to 100 LPW (Depending on PAR lamp)	100 LPW
	Beam	NR 25°, FL 35°	SP 15°, NR 25°, FL 35°	SP 15°, NR 25°, FL 40°	60° x 90°
	Max CBCP	5300 / 3800	32000 / 21000 / 7900	595 to 14800 (Depending on PAR lamp)	N.A
	Medias	4 (Honey Comb, Square Lenses, CCT Shift Lenses and Color Shift Lenses)	6 (Honey Comb, Linear Spread, Solite, Square and CCT Shift lenses)	N.A	N.A
	Wall Wash	✓	✓	N.A	✓
	Snoot	✓	✓	N.A	N.A
	Barn Door	✓	✓	N.A	N.A
	Track Compatibility	H, J, L	H, J, L	H, J	H, J
	Canopy Mounting	✓	✓	N.A	N.A
	Dimming Type	ELV / Triac	ELV / Triac	ELV / Triac	ELV / Triac
	Dimming Level	Down to 10% (min.)	Down to 5% (min.)	Down to 5% (Depending on PAR lamp)	Down to 10% (min.)
	Listing	ETL Dry	ETL Dry	UL Dry	ETL Dry
	Lifetime	50,000hrs	50,000hrs	25,000 to 50,000hrs	140,000hrs
	Warranty	5yrs	5yrs	1yr for the fixture, 3 to 5yrs for the lamps	5yrs
	Rotation	350°	350°	358°	360°
Tilt	90°	120°	90°	90°	
Special Features	SelectDrive 		✓		✓
	SelectKelvin 				✓
	BAA / TAA 		BAA	TAA	

# GREEN CREATIVE TRACK SYSTEM

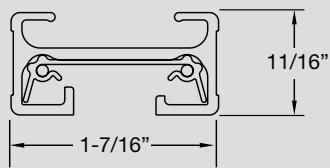

Nominal Length	Exact Length A
24in. / 2ft.	20-1/8"
48in. / 4ft.	44-1/8"
96in. / 8ft.	92-1/8"

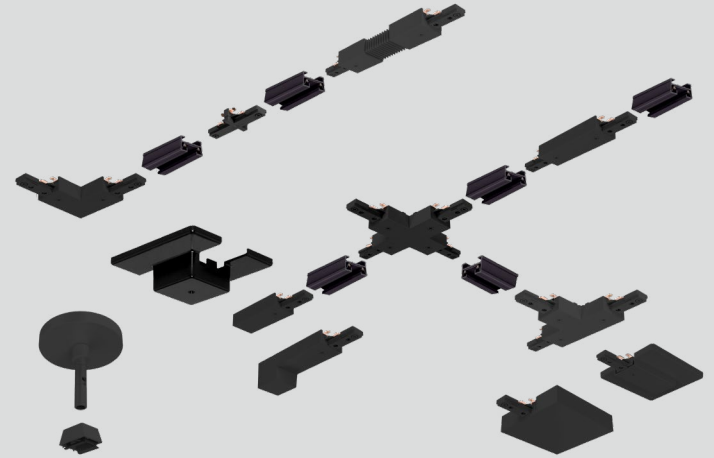

Type	GREEN CREATIVE Track (J-Type)
Dimensions	1-7/16x11/16" I-Beam Style
Finish	White, Black, Silver
Section	24", 48" and 96" (field cuttable)
Electrical Rating	20A at 120V, 60Hz. 2.4 kW Max. Power
Circuit	Single Circuit
Dimming	120V
Surface Mount	✓
Pendant Mount	✓
T-Bar Installation	✓
Fixture Series Compatibility	ATOM, ORBIT, SOL, NOVA



NOVA

SOL

ORBIT

ATOM

GREEN CREATIVE TRACK Retrofit Compatibility						
Series	GREEN CREATIVE Track and Juno		Halo		Lightolier	
	Single Circuit	Multi-Circuit	Single Circuit	Multi-Circuit	Single Circuit	Multi-Circuit
ATOM	✓		✓	✓	✓	✓
ORBIT	✓		✓	✓	✓	✓
SOL	✓		✓	✓		
NOVA	✓		✓	✓		