



TRACK SYSTEM

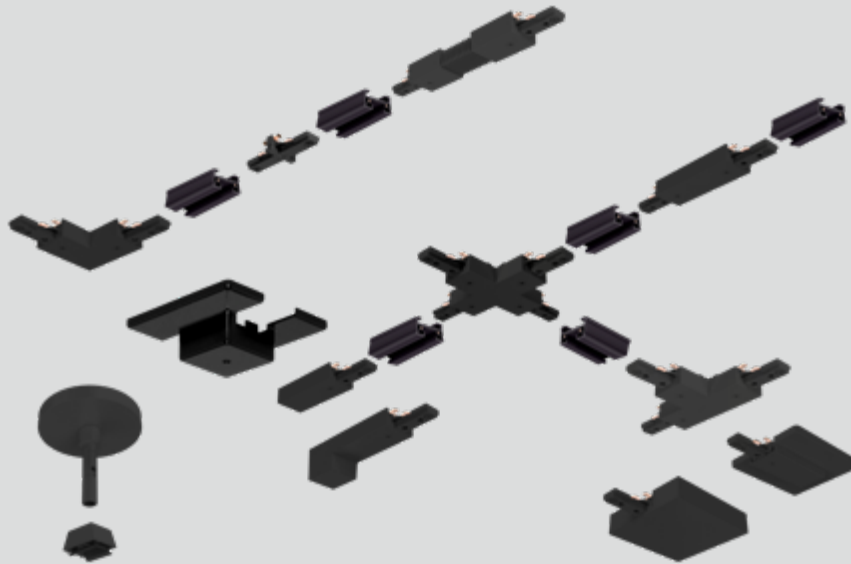

FEATURES

- Extruded aluminum, “I-Beam” design construction for strength and rigidity
- Available standard in 24”, 48” and 96” lengths
- Field-cuttable for custom lengths
- Black, white and silver finishes available
- Rated for 20A at 120V, 60Hz. Maximum power rating is 2.4 kW
- Surface, cable or pendant installation options
- Mechanical polarity with a visual indicator simplifies installation
- All track system components are cULus listed for dry location
- Use with GREEN CREATIVE ATOM and ORBIT track fixtures
- Compatible with all J-Type track heads

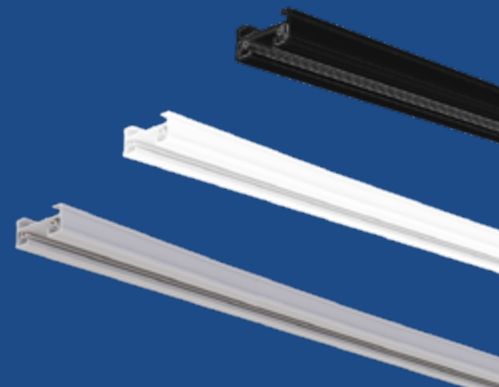

COMMERCIAL



RETAIL



ART GALLERY



HOSPITALITY

SINGLE CIRCUIT J-TYPE TRACK SYSTEM - POWER FEEDS

TOP ACCESS END FEED

For direct wiring through ceiling with junction box or end feed in suspension, cover plate is required over junction box. Accepts 3/8" or 1/2" (trade size) electrical fittings.



TOP ACCESS END FEED

For surface conduit wiring. Accepts 3/8" or 1/2" (trade size) electrical fittings.



END FEED WITH COVER

For Wiring through junction box, located at one end of the track section. Built-in junction box cover.



FLOATING CANOPY FEED

For wiring through junction box. Can be located anywhere along track section.



T-BAR END FEED

Direct wiring through ceiling tile with junction box when T-Bar is directly above track. Accepts 3/8" or 1/2" (trade size) electrical fittings.



END CAP

For wiring through junction box. Can be located anywhere along track section.



SINGLE CIRCUIT J-TYPE TRACK SYSTEM - CONNECTORS

MINI I CONNECTOR

Connects two track sections end to end. Low profile design for a clean continuous run. Cannot be used as feed point.



I CONNECTOR

Connects two track sections end to end. May be used as feed point, cover plate is required over junction box.



I FLEXIBLE CONNECTOR

Connects two track sections end to end. May be used as feed point, cover plate is required over junction box.



L CONNECTOR

Connects two track sections end to end in a 90° angle configuration. May be used as feed point.



T CONNECTOR

Connects three track sections in a T shape configuration. Reverse polarity available. May be used as feed point.



X CONNECTOR


Connects four track sections in an X configuration, for two separate 90° runs (one run field wiring possible). May be used as feed point.



SINGLE CIRCUIT J-TYPE TRACK SYSTEM - MOUNTING AND SUSPENSION

SQUARE COVER PLATE

Square Cover Plate with threaded center access hole. Includes ground washer, and X connectors. Covers standard 4" octagonal J-Box.



SUSPENSION CANOPY

Suspend track from ceiling or junction box. Includes canopy and track bracket. Stem not included.



SLOPE CEILING CANOPY

Suspend track from slope ceiling or junction box. Includes canopy, swivel adapter and track bracket. Stem not Included.



STEM

1/4" IPS Suspension Stems (Iron Pipe Standard). 12, 24, 46 or 48" long. 1/2" O.D. 3/4" x 3/4" threaded at each end. May be extended using stem coupling.



STEM COUPLING

Connects two suspension 1-4 IPS stems to extend the drop.



STEM

Slide-on Type T-Bar Mounting Clip for flush tile ceiling. Use two for 2ft or 4ft section. Use 3 for 8ft.



WIRE WAY COVER

Conceals electrical feed wire from stem to end feed.





GREEN CREATIVE Single Circuit J-Type Track System is compatible with all GREEN CREATIVE Track Fixtures with J-type adapter, including the ATOM and ORBIT track lines.

Contact your GREEN CREATIVE representative to get your project on track or visit www.greencreative.com for more information