




# DIRECT PL OMNI

## MODEL

Model: 6.5PLO/xxx/DIR  
9.5PLO/xxx/DIR

Where xxx means 824-965 which indicates CIR and color temperature

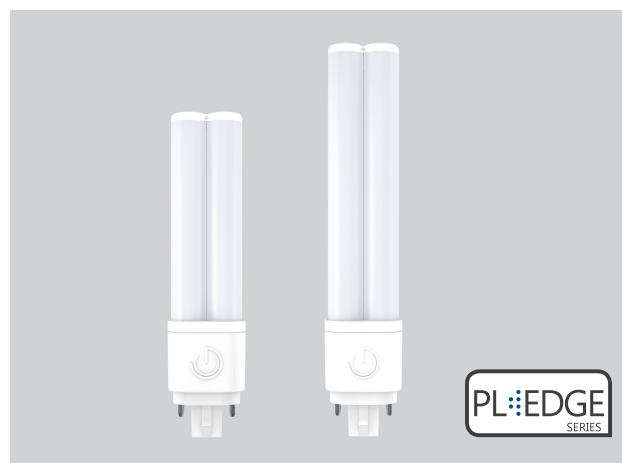

## 0 - 10V DIMMER COMPATIBILITY

Model: 6.5PLO/xxx/DIR 9.5PLO/xxx/DIR

Brand	Series	Model	Load	Ballast (Ballasts are compatible with 120V & 277V unless otherwise noted)											
				Philips											
				IZT-2S26-M5-BS				IZT-2S26-M5-LD				IZT-2T42-M5-BS			
				1 lamp		2 lamps		1 lamp		2 lamps		1 lamp		2 lamps	
				Dimming Range	Dimmability	Dimming Range	Dimmability	Dimming Range	Dimmability	Dimming Range	Dimmability	Dimming Range	Dimmability	Dimming Range	Dimmability
Lutron	Diva	DVSTV	960W	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible
	Diva	DVSCTV	1000W	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible
	Nova	NFTV	/	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible
	Nova	NTSTV-DV	960W	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible
Leviton	Illumatech	IP710-LFZ	1200W	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible	0-100%	Compatible

Model: 6.5PLO/xxx/DIR 9.5PLO/xxx/DIR

Brand	Series	Model	Load	Ballast (Ballasts are compatible with 120V & 277V unless otherwise noted)			
				Philips			
				IZT-2T42-M5-LD			
				1 lamp		2 lamps	
				Dimming Range	Dimmability	Dimming Range	Dimmability
Lutron	Diva	DVSTV	960W	0-100%	Compatible	0-100%	Compatible
	Diva	DVSCTV	1000W	0-100%	Compatible	0-100%	Compatible
	Nova	NFTV	/	0-100%	Compatible	0-100%	Compatible
	Nova	NTSTV-DV	960W	0-100%	Compatible	0-100%	Compatible
Leviton	Illumatech	IP710-LFZ	1200W	0-100%	Compatible	0-100%	Compatible

GREEN CREATIVE has provided this dimmer compatibility chart for guidance when selecting a ballast, dimmer and lamp combination. Lamps were tested for compatibility with the above listed ballasts and dimmers. Ballasts and dimmers that do not appear on the chart might still be compatible but have not been tested. All testing has been performed with a stable main supply. The quality of the local main, existing installation and wiring, as well as different manufacturer versions of the above ballasts may affect lamp performance. Since no assurance can be provided regarding these factors, it is a general recommendation to perform a test on-site prior to installing the LED lamps.