



GREENCREATIVE

Your Partner for Professional Lighting Solutions



VERSA AND PREMIUM FILAMENT LED SERIES



Designed for efficiency in energy consumption and versatility in retrofitting. The VERSA filament lamp series is the optimal choice for conveniently upgrading most any existing incandescent lamp application.

APPLICATIONS





Fully enclosed wet location rated

Suitable for use in fully enclosed fixtures like jelly jars, wall lanterns and pendants. Operation temperature -25° to 45°.




ENCLOSED



Exceptional efficacy 120 LPW

Energy saving options for all types of fixtures (open non-enclosed/enclosed).

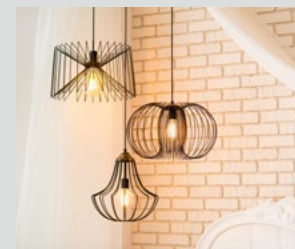

Full glass construction

- Wider beam angle which is suitable for general lighting
- Extends applications with wet location feature, including indoor and outdoor



WET LOCATION



OMNI DIRECTIONAL

ES, T20 and T24 JA8 compliance

California compliant



Smoothly dimming with most dimming controls

Greater flexibility for traditional lighting replacement



DIMMABLE


PREMIUM FILAMENT LED SERIES



High CRI Filament LED

GREEN CREATIVE's premium series of filament lamps feature a high CRI led source which insures natural and comfortable light that can be used to meet California Title 20 regulations.

MICRO-DESIGNED DRIVER - FULLY DIMMABLE

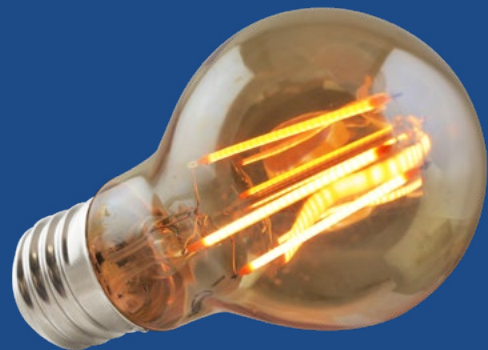

GREEN CREATIVE filament lamps feature a micro-designed driver that provides excellent dimming performance without the need for a heat sink. For specific dimming results please review the dimming compatibility list at www.greencreative.com.

DESIGNED FOR ALL DECORATIVE APPLICATIONS



PREMIUM FILAMENT LED SERIES



A19 Filament LED

- Vintage A-lamp look
- A19 60W replacement clear, amber, frosted
- A19 40W replacement clear, amber, frosted
- Fully omnidirectional 320° beam angle
- Suitable for use in wet locations

G16.5 Filament LED

- Vintage globe look
- G16.5 40W replacement clear & amber
- Fully omnidirectional 320° beam angle
- Suitable for use in wet locations

G25 Filament LED

- Vintage globe look
- G25 40W replacement clear & amber
- Fully omnidirectional 320° beam angle
- Suitable for use in wet locations

G40 Filament LED

- Vintage globe look
- G40 40W replacement clear
- Fully omnidirectional 320° beam angle
- Suitable for use in wet locations

A19 & G25 Silver Bowl LED

- Vintage incandescent with traditional silver bowl
- Ideal for providing indirect, intimate lighting over table tops – perfect for restaurant application.
- Suitable for use in wet locations

Candle Filament LED

- Vintage candle look
- B11 40W replacement clear & frosted
- B11 60W replacement clear
- BA10 40W replacement amber
- Fully omnidirectional 320° beam angle
- Suitable for use in wet locations

S14 Filament LED

- Vintage look
- LED S14 lamp ideally suited for signage and string lighting
- Fully omnidirectional 320° beam angle
- Suitable for use in wet locations























ST19 Filament LED

- Vintage look
- ST19 40W replacement amber
- Fully omnidirectional 320° beam angle
- Suitable for use in wet locations

T6 / T10 Filament LED








- Vintage look
- T6 25W replacement amber
- T10 25W replacement amber
- Fully omnidirectional 320° beam angle
- Suitable for use in wet locations

SPECIFICATIONS - PREMIUM FILAMENT SERIES

Photo	Model	CCT	Equiv.	Wattage (W)	Lumens	Efficacy (LPW)	CRI (typ.)	Dim.*	Lifetime (70)	Finish	Fixture Rating	ES / T20	
	36061	3.3FB11DIM/927/R	2700K	40W	3.3	300	91	92	Yes	15,000	Clear	Non-Enclosed	✓/✓
	36062	3.3FB11DIM/927/E26/R	2700K	40W	3.3	300	91	92	Yes	15,000	Clear	Non-Enclosed	✓/✓
	36063	3.3FB11DIM/927/FR/R	2700K	40W	3.3	300	91	92	Yes	15,000	Frosted	Non-Enclosed	✓/✓
	36064	5.5FB11DIM/927/R	2700K	60W	5.5	500	91	92	Yes	15,000	Clear	Non-Enclosed	✓/✓
	36065	5.5FB11DIM/927/E26/R	2700K	60W	5.5	500	91	92	Yes	15,000	Clear	Non-Enclosed	✓/✓
	36066	3.5FBA11DIM/820/FT/A/R	2000K	40W	3.5	240	69	82	Yes	15,000	Amber	Non-Enclosed	N.A. / N.A.
	36067	3.8FG16.5DIM/927/R	2700K	40W	3.8	350	91	92	Yes	15,000	Clear	Non-Enclosed	✓/✓
	36068	3.8FG16.5DIM/927/E26/R	2700K	40W	3.8	350	91	92	Yes	15,000	Clear	Non-Enclosed	✓/✓
	36069	4FG16.5DIM/820/A/R	2000K	40W	4	250	63	82	Yes	15,000	Amber	Non-Enclosed	N.A. / N.A.
	36070	3.8FG25DIM/927/R	2700K	40W	3.8	350	92	92	Yes	15,000	Clear	Non-Enclosed	✓/✓
	36071	4FG25DIM/820/A/R	2000K	40W	4	250	63	82	Yes	15,000	Amber	Non-Enclosed	N.A. / N.A.
	36072	4.5FG25DIM/827/SB/R	2700K	40W	4.5	400	89	82	Yes	15,000	Silver Bowl	Non-Enclosed	N.A. / N.A.
	36073	5.5FG40DIM/927/R	2700K	60W	5.5	500	91	92	Yes	15,000	Clear	Non-Enclosed	- / -
	36075	3FT6DIM/820/A/R	2000K	25W	3	110	37	82	YES	15,000	Amber	Non-Enclosed	N.A. / N.A.
	36077	1FS14/827/R	2700K	11W	1	55	55	82	NO	15,000	Clear	Non-Enclosed	N.A. / N.A.
	36078	1FS14/820/A/R	2000K	11W	1	35	35	82	NO	15,000	Amber	Non-Enclosed	N.A. / N.A.
	36079	5FA19DIM/927/R	2700K	40W	5	450	90	92	YES	15,000	Clear	Non-Enclosed	✓/✓
	36080	5FA19DIM/927/FR/R	2700K	40W	5	450	90	92	YES	15,000	Frosted	Non-Enclosed	✓/✓
	36081	5FA19DIM/820/A/R	2000K	40W	5	340	68	82	YES	15,000	Amber	Non-Enclosed	N.A. / N.A.
	36082	9FA19DIM/927/R	2700K	60W	9	810	90	92	YES	15,000	Clear	Non-Enclosed	✓/✓
	36083	9FA19DIM/927/FR/R	2700K	60W	9	810	89	92	YES	15,000	Frosted	Non-Enclosed	✓/✓
	36085	7.5FA19DIM/827/SB/R	2700K	60W	7.5	700	93	82	YES	15,000	Silver Bowl	Non-Enclosed	N.A. / N.A.

*This lamp might not be compatible with all dimmers. Please visit www.greencreative.com for compatibility information.

SPECIFICATIONS - VERSA FILAMENT SERIES

Photo	Model	CCT	Equiv.	Wattage (W)	Lumens	Efficacy (LPW)	CRI (typ.)	Dim.*	Lifetime (70)	Finish	Fixture Rating	ES / T20 / JA8	
	36747	9FA19DIM/927/RC	2700K	60W	9	820	91	92	Yes	15,000	Clear	Enclosed	✓/✓/ N.A.
	36748	9FA19DIM/930	3000K	60W	9	820	91	92	Yes	15,000	Clear	Enclosed	✓/✓/ N.A.
	36749	9FA19DIM/940	4000K	60W	9	850	94	92	Yes	15,000	Clear	Enclosed	✓/✓/ N.A.
	36750	9FA19DIM/950	5000K	60W	9	850	94	92	Yes	15,000	Clear	Enclosed	✓/✓/ N.A.
	36751***	10FA19DIM/927	2700K	75W	10	1,150	115	92	Yes	15,000	Clear	Enclosed	✓/✓/✓
	36752	10FA19DIM/930	3000K	75W	10	1,150	115	82	Yes	15,000	Clear	Enclosed	✓/✓/✓
	36753	10FA19DIM/940	4000K	75W	10	1,200	120	92	Yes	15,000	Clear	Enclosed	✓/✓/✓
	36754***	10FA19DIM/950	5000K	75W	10	1,200	120	92	Yes	15,000	Clear	Enclosed	✓/✓/✓
	37056	2FB11DIM/927	2700K	25W	2	200	100	92	Yes	25,000	Clear	Enclosed	✓/✓/ N.A.
	37057	2FB11DIM/927/E26	2700K	25W	2	200	100	92	Yes	25,000	Clear	Enclosed	✓/✓/ N.A.
	37058	3.3FB11DIM/927/RC	2700K	40W	3.3	300	91	92	Yes	25,000	Clear	Enclosed	✓/✓/ N.A.
	37061	3.3FB11DIM/820/A	2000K	40W	3.3	240	79	82	Yes	25,000	Amber	Enclosed	N.A. / N.A. / N.A.
	37064	5.5FB11DIM/927/FR	2700K	60W	5.5	500	91	92	Yes	25,000	Frosted	Enclosed	✓/✓/ N.A.
	37065	5.5FB11DIM/927/E26/RC	2700K	60W	5.5	500	91	92	Yes	25,000	Clear	Enclosed	✓/✓/ N.A.

Notes:
***MTO (Make To Order) codes



GREENCREATIVE

Your Partner for Professional Lighting Solutions

